

Vadnais Lake Area Water Management Organization

2020 Water Monitoring Report



VADNAIS LAKE AREA WATER MANAGEMENT ORGANIZATION

2020 WATER MONITORING REPORT

Prepared by
Brian Corcoran, VLAWMO Water Resource Manager
December, 2020

VLAWMO Board of Directors

Director Jim Linder, Chair (City of Gem Lake)
Director Dan Jones, Vice-Chair (City of White Bear Lake)
Director Rob Rafferty, Secretary/Treasurer (City of Lino Lakes)
Director Marty Long (City of North Oaks)
Director Patricia Youker (City of Vadnais Heights)
Director Ed Prudhon (White Bear Township)

VLAWMO Technical Commission

Gloria Tessier, Chair (City of Gem Lake)
Jessie Farrell, Vice-Chair (City of Vadnais Heights)
Bob Larson, Treasurer (City of North Oaks)
Terry Huntrods (City of White Bear Lake)
Paul Duxbury (White Bear Township)
Andy Nelson (City of Lino Lakes)



Vadnais Lake Area Water Management Organization
800 East County Road E
Vadnais Heights, MN 55127
651-204-6070
www.vlawmo.org

TABLE OF CONTENTS

TERMS AND ACRONYMS	4
INTRODUCTION	
VLAWMO Boundary.....	8
VLAWMO Water Bodies.....	9
Monitoring Sites.....	10
Impaired Waters.....	11
Water Quality Standards.....	12
Precipitation.....	13
Lake TSI Status.....	14
Monitoring Results—Lakes	
Amelia.....	19
Black.....	22
Birch.....	25
Charley.....	28
Deep.....	31
Gem.....	34
Gilfillan.....	37
Goose.....	41
East Vadnais.....	46
Sucker.....	48
Pleasant.....	51
Tamarack.....	53
West Vadnais.....	56
Wilkinson.....	59
Lake Comparison.....	62
Lake Levels.....	66
Monitoring Results—Lambert Creek	
LC—Goose.....	68
LC—Whitaker.....	70
LC—WBLSS.....	72
LC—Oakmede.....	76
LC—Cty Rd F.....	78
LC—Koehler.....	80
Lambert Creek Flow.....	82
Lambert Creek Comparison.....	83
2020 Monitoring Highlights	
Highlights.....	85

Definitions & Abbreviations

Ammonia (NH₃) – an inorganic form of nitrogen that is contained in fertilizers, septic system effluent, and animal wastes. It is also a product of bacterial decomposition of organic matter. NH₃ becomes a concern if high levels of the un-ionized form are present. In this form NH₃ can be toxic to aquatic organisms. The presence of un-ionized ammonia is a function of the NH₃ concentration, pH, and temperature. Conversion of NH₃ to NO₂ by nitrification requires large quantities of oxygen which can kill aquatic organisms due to the lowered dissolved oxygen concentrations in water.

Aquatic Invasive Species (AIS) – non-native species such as zebra mussels and Eurasian watermilfoil

Birch Lake Improvement District (BLID) – Homeowner/lakeshore owners on Birch Lake in White Bear Lake MN

Chlorophyll-a (Chl A) - Chl A is a green pigment in algae. Measuring Chl A concentration gives an indication of how abundant algae are in a waterbody.

Colony Forming Units (CFU) – unit used in measuring the level of E. coli in a water sample.

Conductivity (mS/cm) - Conductivity is a good measure of salinity in water. The measurement detects chloride ions from the salt. Salinity affects the potential dissolved oxygen levels in the water. The greater the salinity, the lower the saturation point. Measurement in millisiemens per cm. 1 mS/cm = 1000 uS/cm.

Dissolved Oxygen (DO) - The concentration of molecular oxygen (O₂) dissolved in water. The DO level represents one of the most important measurements of water quality and is a critical indicator of a water body's ability to support healthy ecosystems. Levels above 5 mg/L are considered optimal, and most fish cannot survive for prolonged periods at levels below 3 mg/L. Microbial communities in water use oxygen to breakdown organic materials, such as animal waste products and decomposing algae and other vegetation. Low levels of dissolved oxygen can be a sign that too much organic material is in a water body.

Ecoli – Criteria for E. coli set forth in Minn.R. 7050.0222 creek must not exceed 126 organisms per 100 ml as a geometric mean of not less than 5 samples in any calendar month, nor shall more than ten percent of all samples taken during any calendar month individually exceed 1,260 organisms per 100 ml

EQUIS - a repository for water quality, biological, and physical data and is used by state environmental agencies, EPA and other federal agencies, universities, private citizens, and many others. The MPCA uses the information entered into the database to determine the quality of the state's water bodies. If water quality standards are not met, the water body will be designated as impaired and will need to have a TMDL study conducted.

Eutrophic – a water body that is high in nutrients and low oxygen content. A eutrophic lake is usually shallow, green, with limited oxygen in the bottom layer of water.

Eutrophication – The aging process by which lakes are fertilized with nutrients. Natural eutrophication will gradually change the character of a lake. Human activities can accelerate the process.

Hypereutrophic – A very nutrient-rich lake with murky water, frequent algal blooms and fish kills, foul odor, and rough fish

Definitions & Abbreviations

Impaired Waters – The Clean Water Act requires states to publish, every two years, a list of streams and lakes that are not meeting their designated uses because of excess pollutants. The list, known as the 303(d) list, is based on violations of water quality standards.

Mesotrophic – the classification between eutrophic and oligotrophic lakes. These lakes have moderately clear water, late-summer algal blooms, moderate macrophyte populations, and occasional fish kills.

Molecular Sourcing – the use of specific DNA markers to determine presence of a specific host origin of E.coli in a water sample (example, Human or Avian)

Most Probable Number (MPN) - unit used in measuring the level of E. coli in a water sample, similar to (CFU)

Nitrate (NO₃) – High NO₃ levels are often caused by over application of fertilizers that leach into water-bodies. Nitrate loading from water bodies in Minnesota has national implications as it is the primary chemical contributing to the hypoxia (low oxygen) zone at the mouth of the Mississippi River in the Gulf of Mexico. The Environmental Protection Agency (EPA) has a standard for nitrates in drinking water of 10ppb, infants and children are especially at risk.

Nitrite (NO₂) – The second stage of the nitrogen cycle. Nitrite is poisonous to fish. Levels over 75 ug/L can cause stress in fish and greater than 500 ug/L can be toxic

Nitrogen (N) – Nitrogen is second only to phosphorus as an important nutrient for plant and algae growth. The amount of nitrogen in a water body strongly correlates to land use. Nitrogen comes from fertilizers, animal waste, sewage treatment plants and septic systems through surface runoff or groundwater sources. Nitrogen does not occur naturally in soil minerals but is a major component of all organic matter.

Nitrogen Cycle - the process of nitrogen breakdown in water. The first stage is the production of NH₃. The second stage is the oxidation of NH₃ into NO₂ which is very poisonous to fish. The final stage is conversion of NO₃ which aquatic plants use. Once the plants have used their share of NO₃, bacteria change it back into a gaseous form and release it back to the atmosphere. The Nitrogen Cycle is dependent on oxygen. If a water body has low DO, organic decay of nitrogen is slower and the water will have increased interim levels of toxic products (NH₃ and NO₂). The cycle also moves quicker in warmer water.

Oligotrophic – a water body that is generally clear, deep, and free of weeds or large algae blooms.

Particulate Phosphorus – a form of phosphorus that is attached to sediment particles and in plant and animal fragments suspended in the water and may not be immediately available to support algae growth. Some of this phosphorus is readily available but the amount can vary.

Phosphorus (P) - Phosphorus is the primary cause of excessive plant and algae growth in lake systems. Phosphorus originates from a variety of sources, many of which are human related. Major sources include human and animal wastes, soil erosion, detergents, septic systems and runoff from farmland, yards, and streets.

Definitions & Abbreviations

Secchi Disk – a round, white, metal disk that is used to determine water clarity. It is lowered into the water until it is not visible. The depth is recorded, and then the disk is raised until it is visible. The mean value of the two readings gives the clarity.

Secchi Disk Transparency (SDT) - the term used in describing the results of a secchi reading expressed in feet or meters.

Soluble Reactive Phosphorus (SRP) – a form of phosphorus that dissolves in water and is readily available (bio-available) to algae and has an immediate effect on algae growth and DO depletion. Its concentration varies widely over short periods of time as plants take it up and release it.

St. Paul Regional Water Service (SPRWS) – Agency which assists VLAWMO with water quality testing and controls the Vadnais chain of lakes, which supplies drinking water to the city of St. Paul.

Surface Water Assessment Grant (SWAG) - Grant awarded by the PCA to help fund surface water monitoring

Total Kjeldahl Nitrogen (TKN) – The sum of NO₂, NO₃, and NH₃ in a water body. High measurements of TKN typically results from sewage and manure discharges to water bodies.

Total Maximum Daily Load (TMDL) – Calculation of the maximum amount of a pollutant that a waterbody can receive and still meet water quality standards and an allocation of that amount to the pollutant's source.

Total Nitrate and Nitrite Nitrogen - Nitrate (NO₃) plus nitrite (NO₂) as nitrogen. In lakes, most nitrate/nitrogen is in NO₃ form.

Total Phosphorus (TP) – A nutrient essential to the growth of organisms, and is commonly the limiting factor in the primary productivity of surface water bodies. Total phosphorus includes the amount of phosphorus in solution (reactive) and in particle form. Agricultural drainage, wastewater, and certain industrial discharges are typical sources of phosphorus, and can contribute to the eutrophication of surface water bodies.

Total Suspended Solids (TSS) – Very small particles remaining dispersed in a liquid due to turbulent mixing that can create turbid or cloudy conditions. A measure of the material suspended in water in mg/l. Total suspended solids (TSS) cause: a) interference with light penetration, b) buildup of sediment and c) potential reduction in aquatic habitat. Solids also carry nutrients that cause algal blooms and other toxic pollutants that are harmful to fish. Clay, silt, and sand from soils, phytoplankton (suspended algae), bits of decaying vegetation, industrial wastes, and sewage are common suspended solids.

Trophic Status Indicator (TSI) – TSI is an indicator of water quality. Lakes can be divided into three categories based on trophic state – oligotrophic, mesotrophic and eutrophic. A natural aging process occurs in lakes which cause them to change from oligotrophic to eutrophic over time and eventually fill in. Humans can accelerate this process by allowing nutrients from agriculture, lawn fertilizers, streets, septic systems, and urban storm drains to enter lakes. Trophic status is determined through TP, Chl A, and SDT measurements.

Definitions & Abbreviations

Turbidity – a water quality parameter that refers to how clear the water is. It is an indicator of the concentration of suspended solids in the water. Excessive sedimentation in streams and rivers is considered to be the major source of surface water pollution in the United States. Polluted waters are commonly turbid. Turbidity is expressed in NTU (Nephelometric Turbidity Units).

Volatile Suspended Solids (VSS) – a measure of the organic matter in suspended particles. When measured in conjunction with TSS, the proportions of organic versus mineral content of the particles can be determined.


INTRODUCTION



The Vadnais Lake Area Water Management Organization (VLAWMO) covers approximately 25 square miles in the northeast metropolitan area. The watershed encompasses the City of North Oaks and portions of the Cities of White Bear Lake, Gem Lake, Vadnais Heights, Lino Lakes, and White Bear Township. The watershed is 96% urbanized; agricultural land exists in the northern end of the boundaries. New land development is occurring near Wilkinson Lake. Data collected through this program tracks changes in water quality in conjunction with the change in land use around these water bodies.

VLAWMO works in conjunction with the St. Paul Regional Water Service (SPRWS) on water quality monitoring. The SPRWS monitors the direct surface water flow into Vadnais Lake to assure high quality drinking water for over 400,000 consumers. The SPRWS monitors the main chain of lakes (Charley Lake, Pleasant Lake, Sucker Lake and Vadnais Lake) and VLAWMO monitors Lambert Creek which flows directly into Vadnais Lake.

Figure 1: Map of VLAWMO with political boundaries

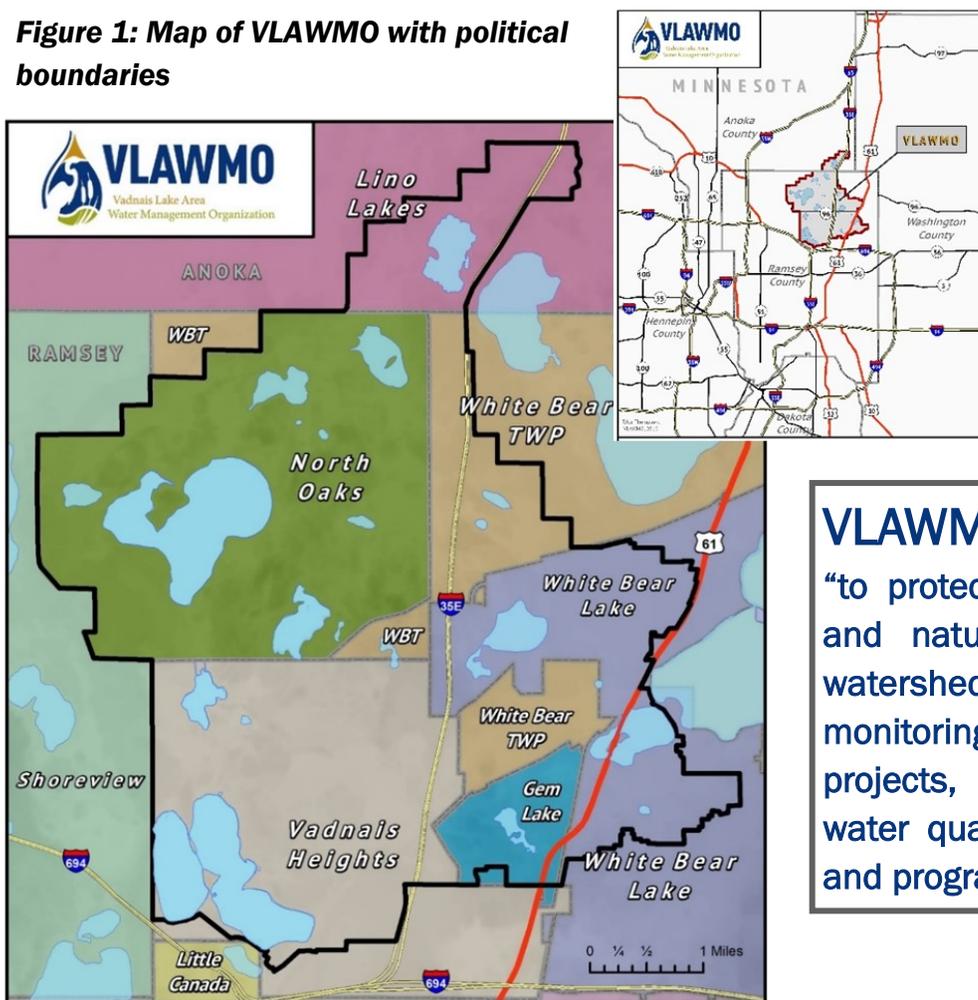

VLAWMO's mission is
"to protect and enhance the water and natural resources within the watershed through water quality monitoring, education and outreach projects, wetland protection, and water quality enhancement projects and programs."

INTRODUCTION

VLAWMO began the Citizens Lake Monitoring Program (CLMP) in 1997 to monitor several lakes and ponds within the watershed that were identified as having local significance. CLMP volunteers have helped collect samples from 15 water bodies: Amelia Lake, Birch Lake, Black Lake, Charlie Lake, Deep Lake, Gem Lake, Gilfillan Lake, Goose Lake East, Goose Lake West, Pleasant Lake, Sucker Lake, Tamarack Lake, East & West Vadnais Lake and Wilkinson Lake. These lakes are mostly shallow with average depths no greater than 9 feet. Five lakes are deeper than 9 feet (Charlie, Gem, Pleasant, Sucker and East Vadnais) Six areas along Lambert Creek are also sampled as part of the Organization’s mission to protect and improve the water-related environment. The data received from the monitoring is used by VLAWMO and the Minnesota Pollution Control Agency (MPCA) to determine the health of the state’s waters.

Figure 2: Map of VLAWMO Water Resources


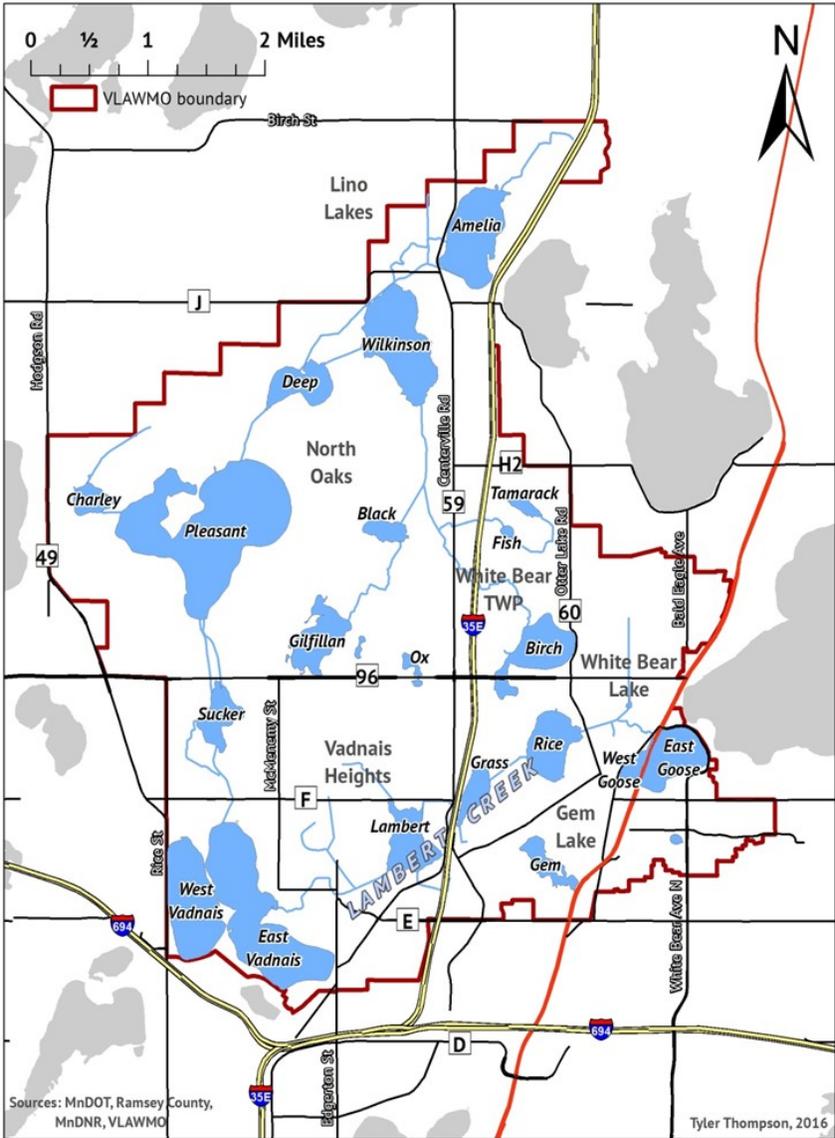



Figure 3: Monitoring Sites in VLAWMO

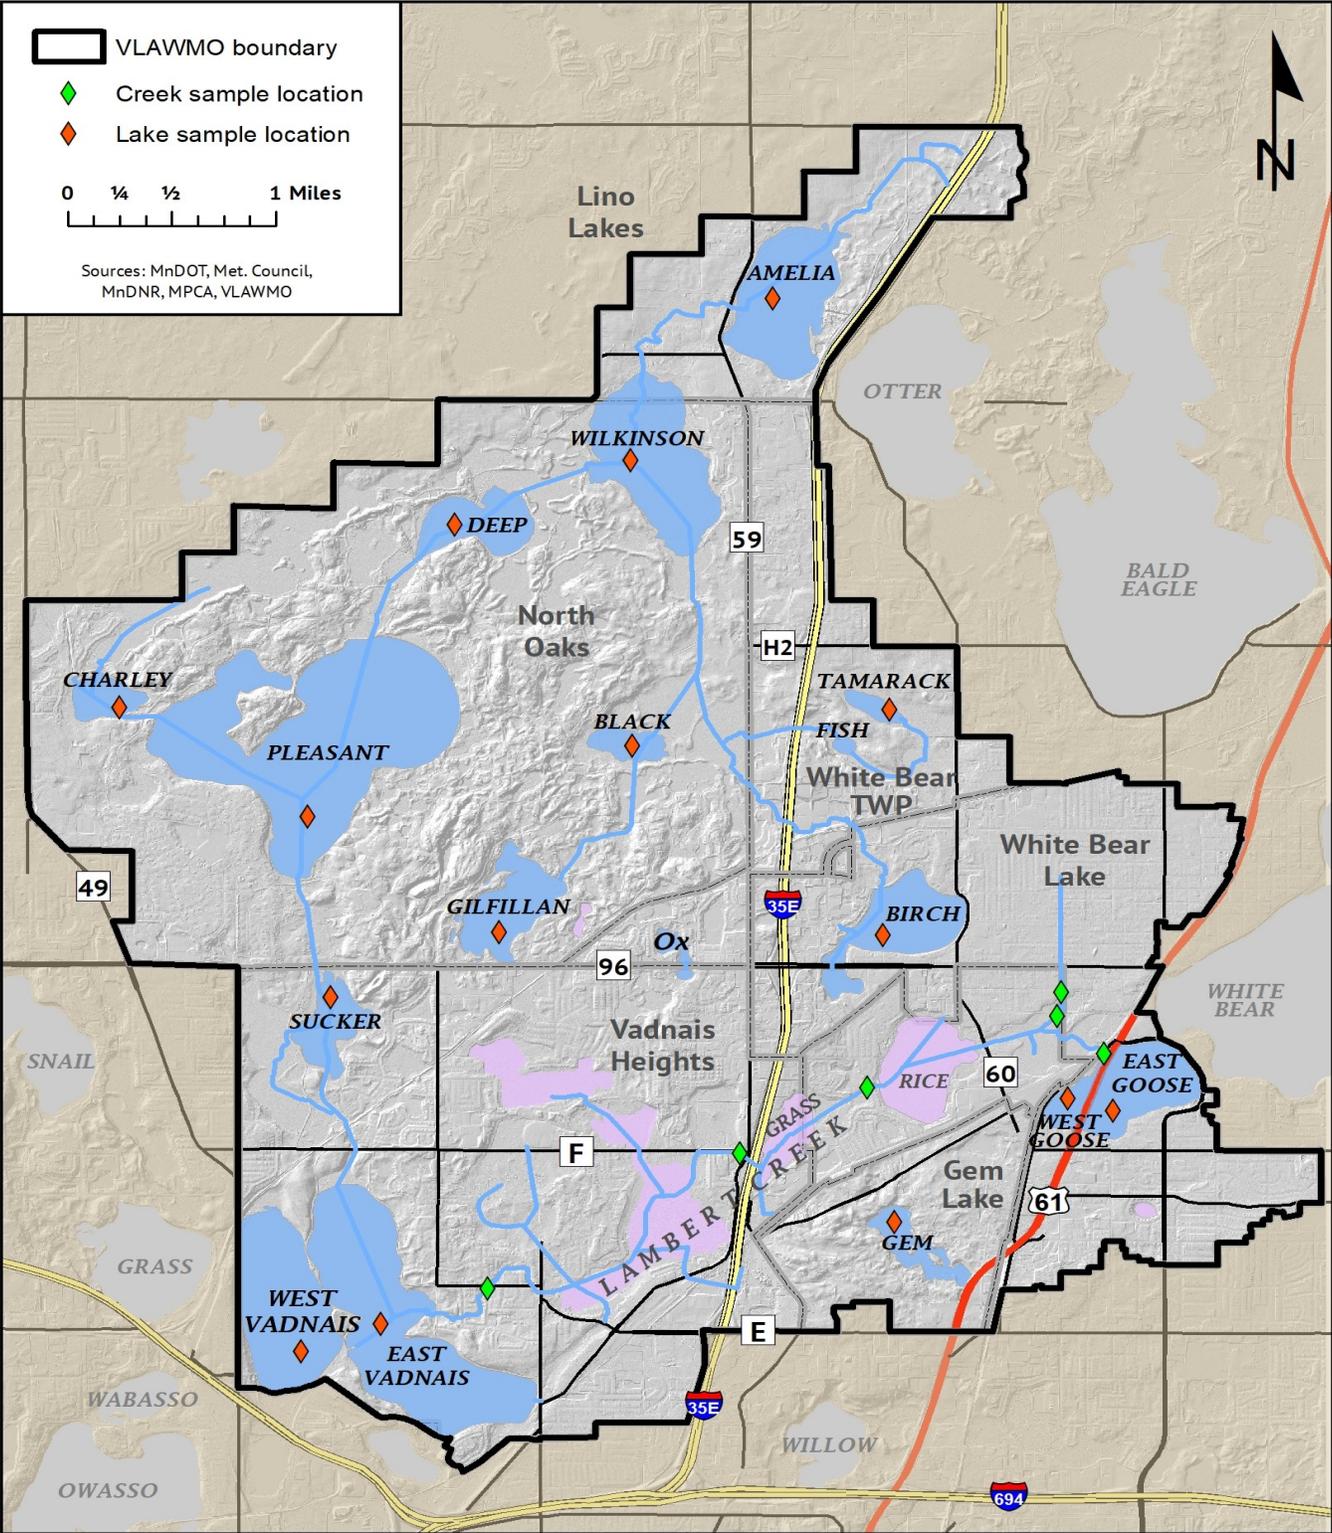

Impaired Water Designations

The watershed has had several water bodies listed on the MPCA 303(d) list for Impaired Waters. The SPRWS Chain of Lakes (Pleasant, Sucker and Vadnais Lakes) have all been listed for nutrient pollution, specifically mercury. These lakes have been infested with zebra mussels, an aquatic invasive species, though this is not a condition of the Impaired Waters listing. This chain of lakes is fed by the Mississippi River through a pump in Fridley, MN. Lambert Creek has been added to the impaired list for bacteria, specifically fecal coliform or E. coli. Gilfillan Lake, Goose Lake and Wilkinson Lake, impaired for nutrients, have also been added. Pleasant Lake, Tamarack Lake and West Vadnais Lake were added to the impaired list for nutrients in 2018.

Figure 4: Waterbodies listed on the MPCA 303(d) Impaired Waters List

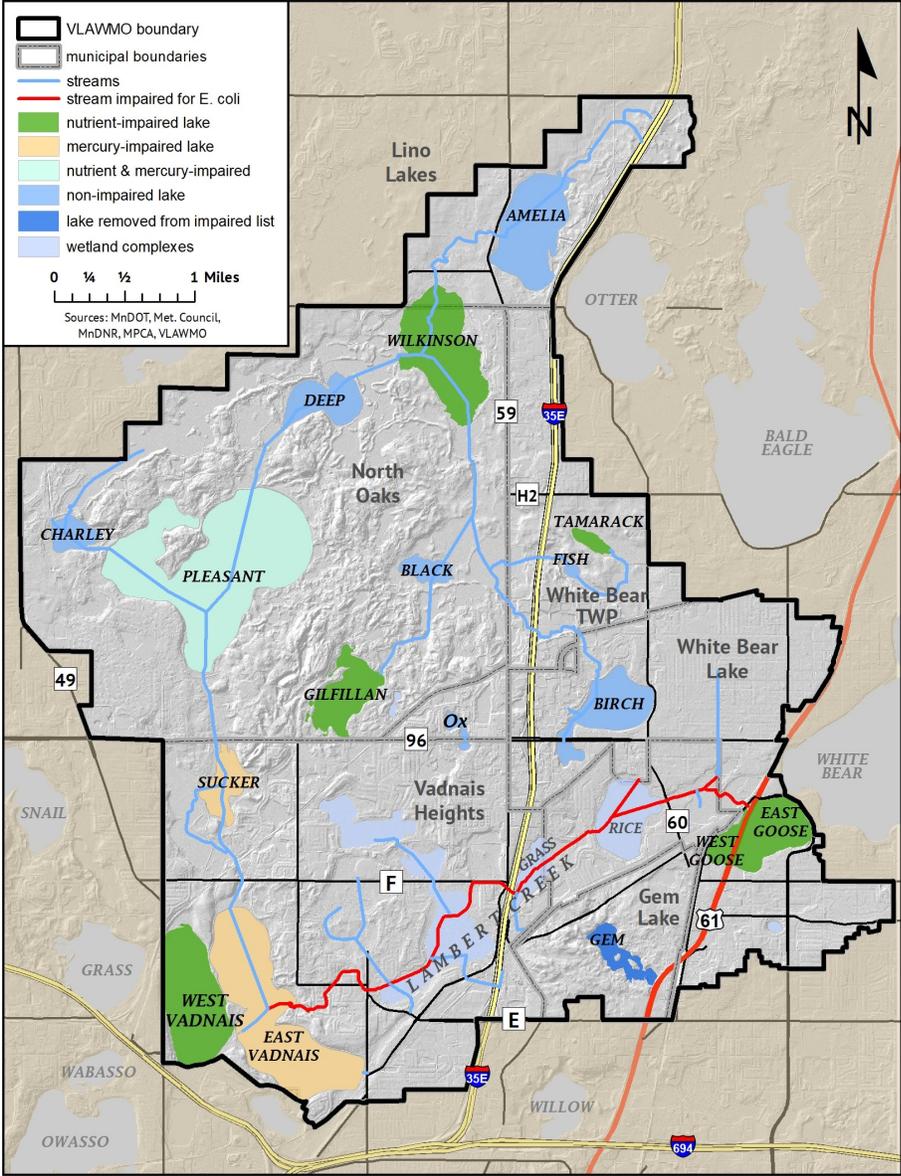

INTRODUCTION

Typical Measurements for Lakes and Streams

VLAWMO's watershed falls within the North Central Hardwood Forest (CHF) ecoregion. This ecoregion is an area of transition between the forested areas to the north and east and the agricultural areas to the south and west. The terrain varies from rolling hills to smaller plains. Non-urbanized upland areas are forested by hardwoods and conifers. Plains include livestock pastures, hay fields and row crops such as potatoes, beans, peas and corn.

The ecoregion contains many lakes, and water clarity and nutrient levels are moderate. Land surrounding many of these lakes has been developed for housing and recreation, and the densely populated metropolitan area dominates the eastern portion of this region. Water quality problems that face many of the water bodies in the area are associated with contaminated runoff from paved surfaces and lawns.

Below are typical measurements one might find for lakes and streams in the CHF ecoregion:

Typical Lake Measurements in CHF Ecoregion							
Field pH	TSS (mg/L)	NO _x (µg/L)	TP (µg/L)	Turb (NTU)	SDT (m)	Chl-a (µg/L)	TKN (µg/L)
8.6 - 8.8	2 - 6	<100	23 - 50	1 - 2	1.5 - 3.2	5 - 22	600 - 1200
Streams							
Field pH	TSS (mg/L)	NO _x (µg/L)	TP (µg/L)	Turb (NTU)	Fecal Coliform (cfu/100 ml)	Temp (°C)	BOD (in mg/L)
7.9 - 8.3	4.8 - 16	4 - 26	6 - 15	3 - 8.5	40 - 360	2 - 21	- 3.2

The MPCA has water quality standards based on a designated use for the water body. VLAWMO's water is classified as "2B". The SPRWS chain of lakes has a stricter designation of "2Bd" due to it being the drinking water source for St. Paul. The quality of Class 2B water must be suitable for aquatic recreation of all kinds as well as to support fish and aquatic plant life. In 2008, the MPCA approved new standards which will separate deep from shallow lakes. All of the lakes VLAWMO monitors are considered shallow and therefore those standards will apply. For those parameters which the MPCA does not have standards, the federal Environmental Protection Agency (EPA) has maximum contaminant level standards. VLAWMO's goal is to have its waterbodies within these standards.

MPCA Standards Lakes					EPA Standards	
TP (µg/L)	Chl A (µg/L)	SDT (m)	Turb (NTU)	TSS (mg/L)	TKN (µg/L)	NO ₂ (µg/L)
< 60	< 20	> 1	< 25	< 100	< 1000	< 100
MPCA Standards - Rivers and Streams					EPA Standards	
Fecal Coliform daily maximum (cfu/100 ml)	Chloride (Cl) chronic (mg/L)	Turb (NTU)	TSS (mg/L)	Un-ionized Ammonia (µg/L)	TKN (µg/L)	NO ₂ (µg/L)
< 1260	< 230	< 25	< 100	<40	< 1000	< 100

INTRODUCTION


Precipitation in 2020

Major factors influence water quality including the amount of precipitation, timing of precipitation events, and land use practices in the watershed. Long-term monitoring is necessary to characterize the impacts of various land use practices on surface water runoff within VLAWMO.

The 2020 monitoring season precipitation was below average by 0.90 inches per month and 10.55 inches below 2019 monitoring season precipitation. Above average monthly rainfall in May, below average in June, July, August & September. Precipitation moves contaminants resting on lawns, roofs, streets, and parking lots into nearby water bodies or into storm sewers that outlet into water bodies. Typically, the more precipitation that occurs, the more runoff there will be in the watershed. However, the timing and intensity of the precipitation, as well as soil types, land slopes, land uses, and other factors can influence the amount of runoff that reaches the water bodies. Lack of rain can also have an effect on the concentration of nutrients and chemicals in our water bodies. With a smaller volume of water in our water bodies, the more concentrated the nutrients and chemicals can become.

2020 Precipitation Data (in inches) Vadnais Heights City Hall Rain Gauge, Vadnais Heights, MN			
	2020 monthly total	Historical Average	Deviation
May	3.96	3.73	0.23
June	4.41	4.98	-0.57
July	3.39	4.41	-1.02
August	2.89	4.37	-1.48
September	1.56	3.2	-1.64
Month Avg. Season	3.24	4.14	-0.90

VLAWMO 2020 Rainfall (monthly)

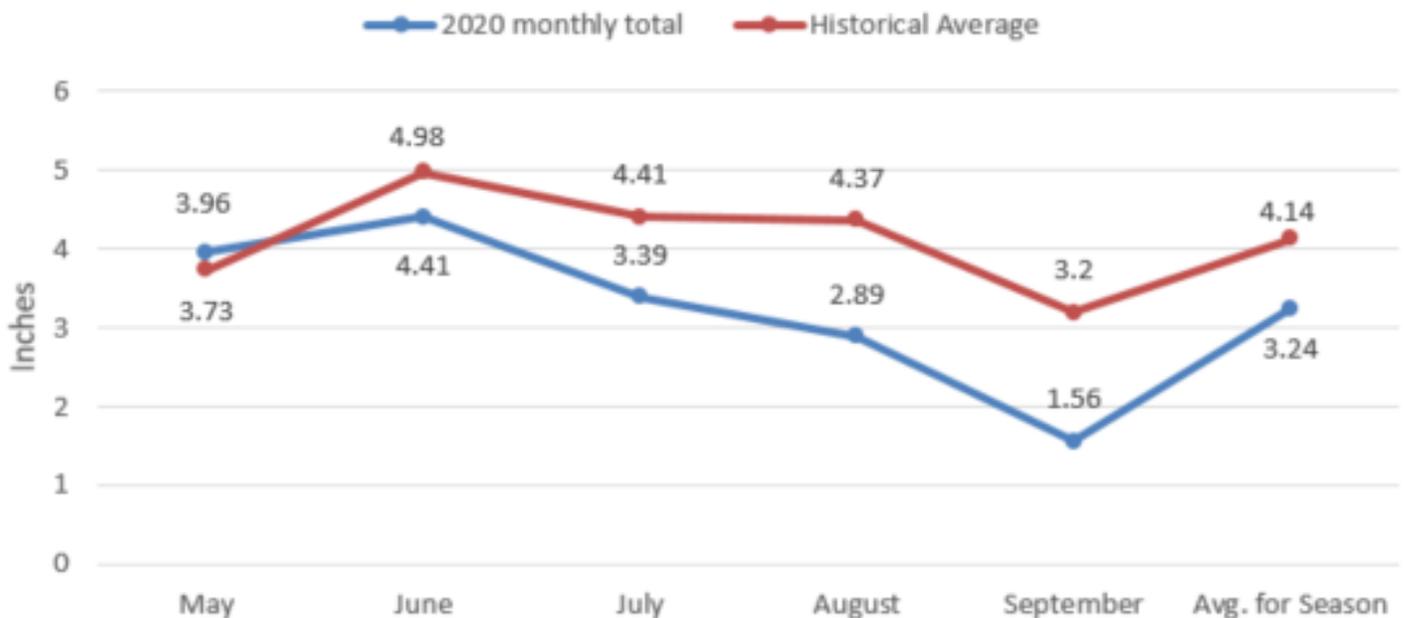

Preliminary Analysis of Lake Data


VLAWMO staff worked with volunteers to collect samples from the lakes at two-week intervals from May through September. VLAWMO staff collected all creek samples. At the time of collection, volunteers measure water transparency with a Secchi disk (SDT), evaluate the physical and recreational conditions of the water, and if available, take a lake level reading. Samples are brought to Braun Intertec by VLAWMO staff within 24 hours for chemical analysis. Parameters measured at the lab include Phosphorus (TP &SRP), Chlorophyll-a (Chl A), total Kjeldahl Nitrogen, nitrate, ammonia and Total Suspended Solids (TSS). The data from these tests aid in the determination of the state of the water quality in a particular lake or stream and allow for monitoring of the long term health of the water body. Standards for water quality are set by the US Environmental Protection Agency (EPA) and enforced through the MPCA.

A measure of the lake health and lake age is Carlson's Trophic State Index (TSI), which measures the productivity level of a lake or degree of eutrophication. As a lake ages, it becomes more eutrophic, however human impact speeds up the process. High TSI values can relate to poorer water quality, with the possibility of variations from lake to lake. To accommodate for these possible variations, the trophic state serves as an absolute scale that describes the biological condition of a water body. VLAWMO lake TSI ratings are listed on page 15 consistent with Minnesota Pollution Control Agency's (MPCA) parameters, which range from hypereutrophic to oligotrophic. Additional TSI rating charts as well as factsheets specific to each lake are also available at vlawmo.org/waterbodies.

Water quality, on the other hand, is a term used to describe the condition of a water body in relation to human needs or values. Analysis of these conditions continue from page 18 and onwards.

INTRODUCTION

Trophic State Indexes (TSI) of VLAWMO Lakes: 2020

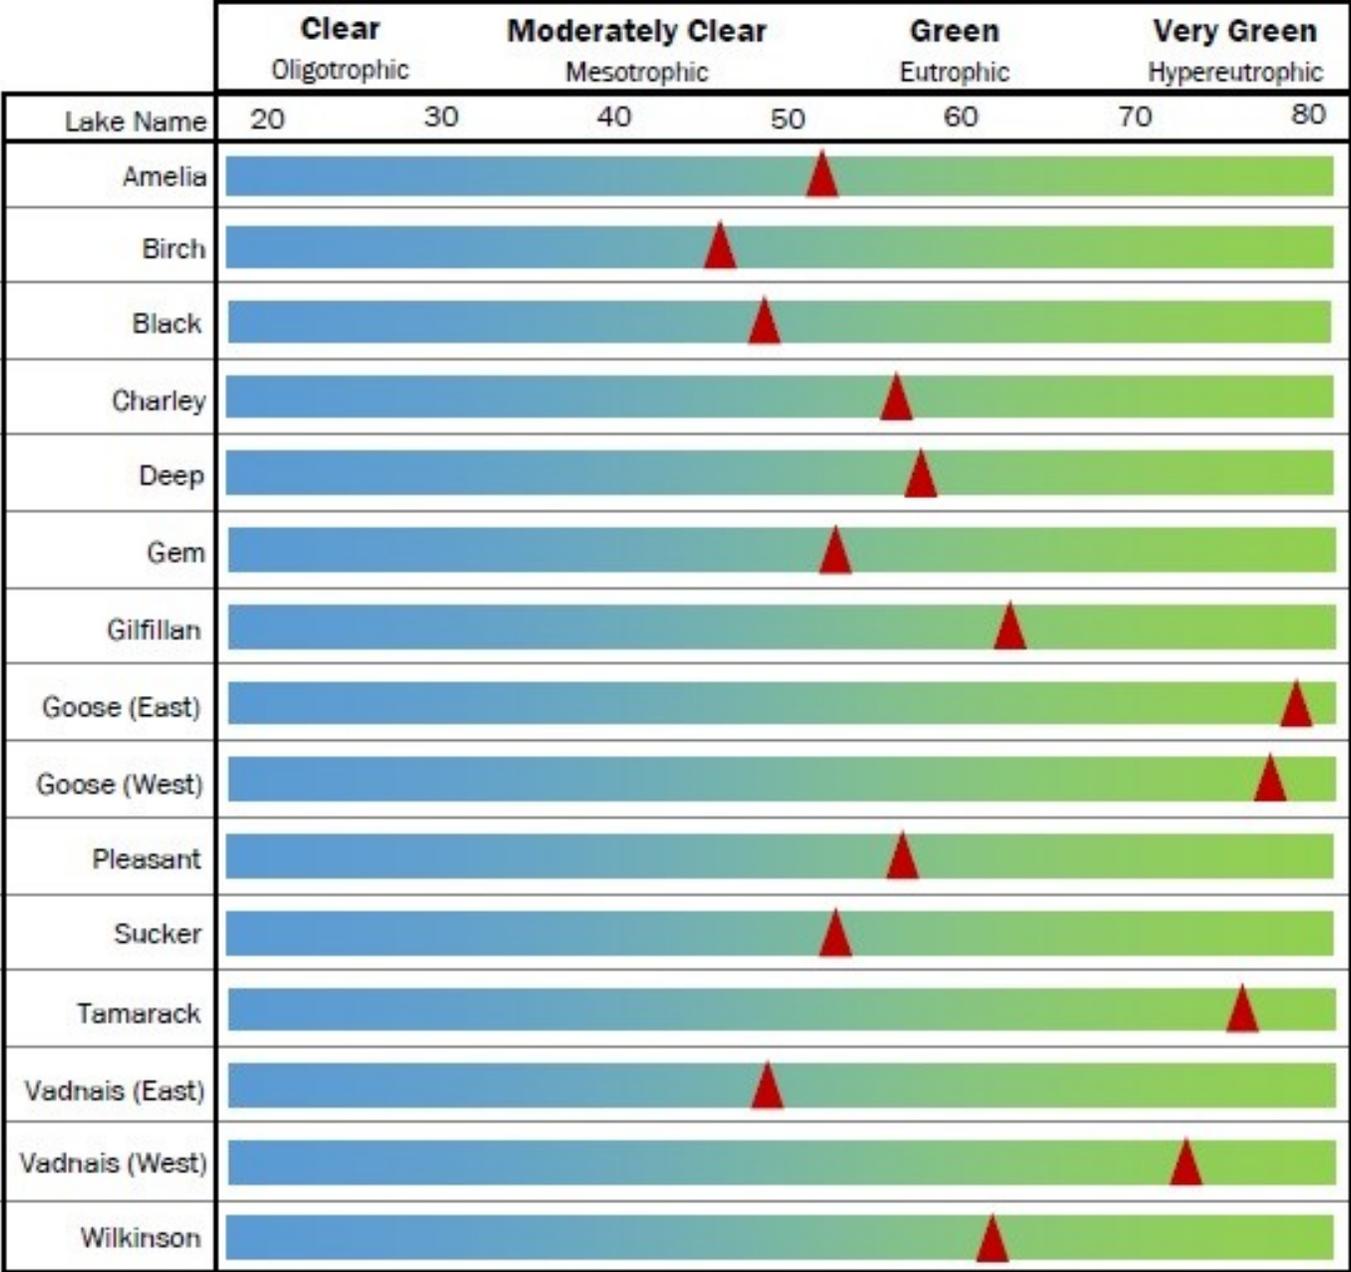

See page 16 for numeric values associated with this scale.

INTRODUCTION

TSI Data: Comparison of 2020 and 2019

2020 TSI Lake Data	Average Secchi Disk (m)	Secchi Disk TSI	Average Chlorophyll A ChlA (mg/m ³)	Chlorophyll A (ChlA) TSI	Average Total Phosphorus (TP) µg/L	Total Phosphorus (TP) TSI	Total TSI
Amelia	1.3	56	5	46	29	53	52
Birch	2	50	3	41	18	46	46
Black	2	50	4	44	25	51	48
Charley	1.3	56	7	50	52	61	56
Deep	1.4	55	8	51	72	66	57
Gem	2.4	47	14	56	35	55	53
Gilfillan	0.8	63	35	65	54	62	63
East Goose	0.3	77	167	81	187	80	79
West Goose	0.3	77	148	80	129	74	77
Pleasant	1.7	52	16	58	41	58	56
Sucker	2	50	8	51	41	58	53
Tamarack	0.4	73	122	78	146	76	76
East Vadnais	1.9	51	3	41	25	51	48
West Vadnais	0.5	70	80	74	127	74	73
Wilkinson	1.1	59	18	59	92	69	62

2019 TSI Lake Data	Average Secchi Disk (m)	Secchi Disk TSI	Average Chlorophyll A ChlA (mg/m ³)	Chlorophyll A (ChlA) TSI	Average Total Phosphorus (TP) µg/L	Total Phosphorus (TP) TSI	Total TSI
Amelia	1.3	56	10	53	36	56	55
Birch	2	50	3	41	18	46	46
Black	2.2	49	3	41	24	50	47
Charley	1.6	53	7	50	60	63	55
Deep	1.4	55	8	51	68	65	57
Gem	1.8	52	11	54	33	55	53
Gilfillan	0.6	67	51	69	56	62	66
East Goose	0.4	73	80	74	155	77	75
West Goose	0.3	77	109	77	180	79	78
Pleasant	1.3	56	15	57	45	59	57
Sucker	1.3	56	14	56	49	60	58
Tamarack	0.4	73	104	76	140	75	75
East Vadnais	1.9	51	12	55	23	49	52
West Vadnais	0.5	70	64	71	79	67	70
Wilkinson	1.1	59	8	51	81	68	59

INTRODUCTION

A list of possible changes that might be expected in a north temperate lake as the amount of algae changes along the trophic state gradient.

TSI	Chl (ug/L)	SD (m)	TP (ug/L)	Attributes	Water Supply	Fisheries & Recreation
<30	<0.95	>8	<6	Oligotrophy: Clear water, oxygen throughout the year in the hypolimnion	Water may be suitable for an unfiltered water supply.	Salmonid fisheries dominate
30-40	0.95-2.6	8>4	6<12	Hypolimnia of shallower lakes may become anoxic		Salmonid fisheries in deep lakes only
40-50	2.6-7.3	4>2	12<24	Mesotrophy: Water moderately clear; increasing probability of hypolimnetic anoxia during summer	Iron, manganese, taste, and odor problems worsen. Raw water turbidity requires filtration.	Hypolimnetic anoxia results in loss of salmonids. Walleye may predominate
50-60	7.3-20	2>1	24-48	Eutrophy: Anoxic hypolimnia, macrophyte problems possible		Warm-water fisheries only. Bass may dominate.
60-70	20-56	0.5-1	48-96	Blue-green algae dominate, algal scums and macrophyte problems	Episodes of severe taste and odor possible.	Nuisance macrophytes, algal scums, and low transparency may discourage swimming and boating.
70-80	56-155	0.25-0.5	96-192	Hypereutrophy : (light limited productivity). Dense algae and macrophytes		
>80	>155	<0.25	192-384	Algal scums, few macrophytes		Rough fish dominate; summer fish kills possible


VLAWMO's water resource manager completes the required data entry each year into the MPCA EQUIS program which makes the determination of impairment and opens opportunities for grants to help remedy the impairments.

2020 MONITORING RESULTS



AMELIA LAKE


Amelia is located in Anoka County and is approximately 217 acres. Maximum depth for the lake is 5 feet. The majority of agricultural land left in the watershed is near Amelia Lake. VLAWMO staff also collected all DO and YSI parameter readings on Amelia. VLAWMO has been monitoring Amelia since 1997. As you can see from the data below the trend for both TP and ChIA has been slightly downward over the last 13yrs. Overall Amelia is below the state standard of 60ug/L for TP and 20mg/m³ for ChIA over the last ten years.

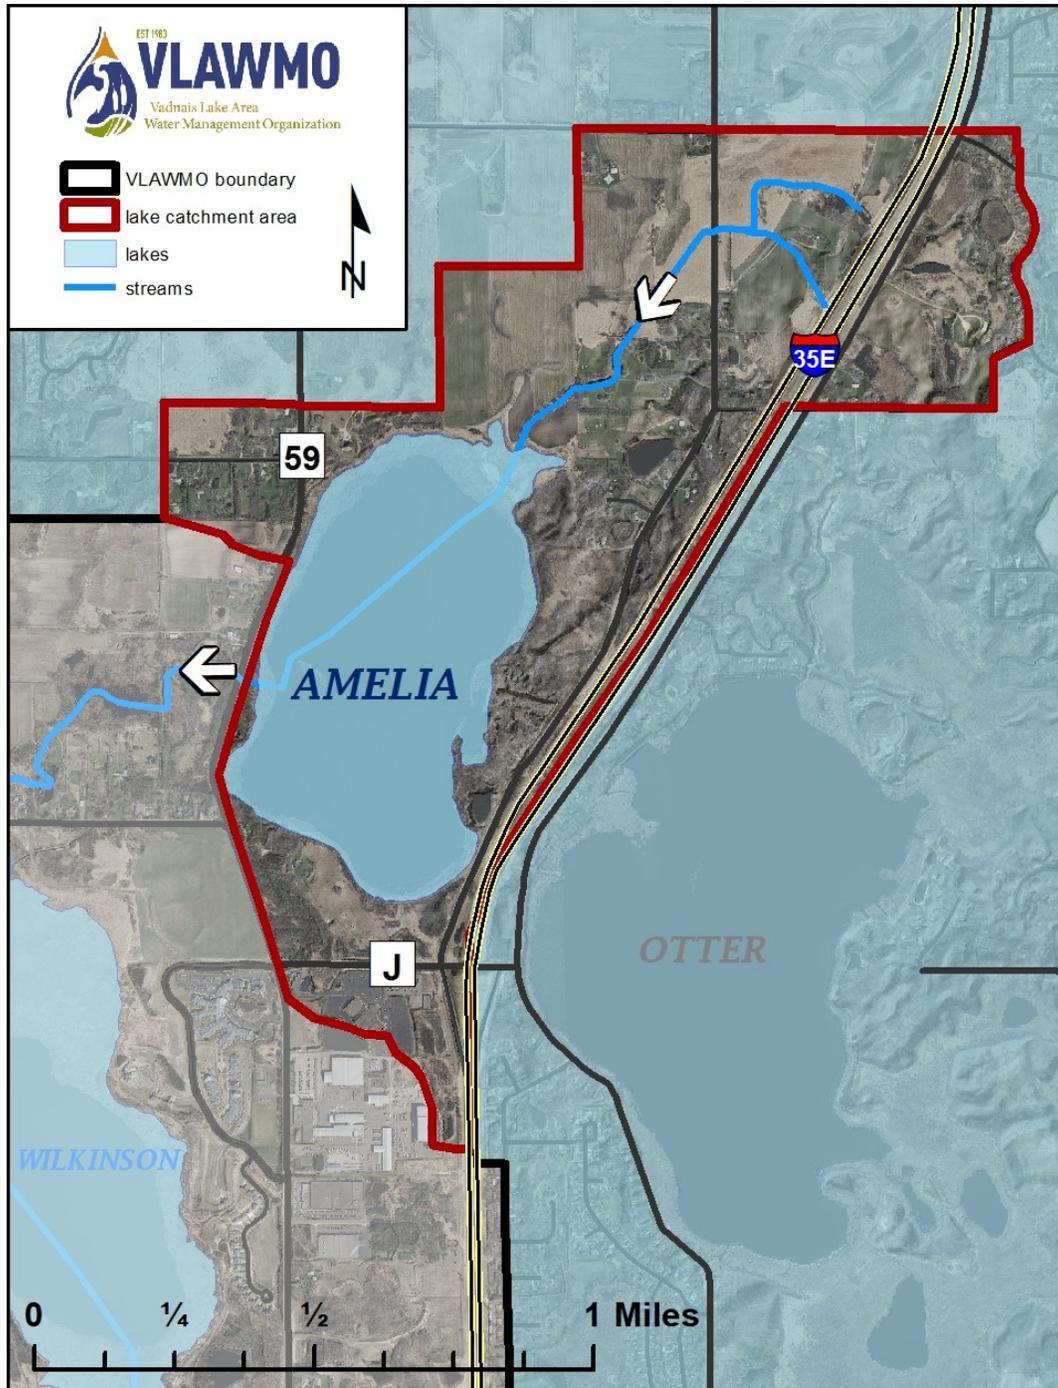

AMELIA LAKE

Amelia Lake Historical Avg TP/Chl A/SDT			
Year	TP (µg/L)	Chl A (µg/L)	Secchi (m)
1997	28	0	1.5
1998	36	14	1.1
1999	38	9	1.2
2000	40	12	0.9
2001	33	8	1.1
2002	34	13	1.4
2003	29	7	1.5
2004	28	0	0
2005	24	7	0
2006	36	12	0
2007	82	32	0.4
2008	26	5	1.1
2009	55	24	0.9
2010	32	12	1.1
2011	38	8	1.1
2012	39	9	1.1
2013	39	19	1.1
2014	48	7.5	1.3
2015	28	21	1.1
2016	51	12	1.1
2017	34	5	1.3
2018	30	4.5	1.4
2019	36	10	1.3
2020	29	5	1.3


Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
5/5/2020	b	14.7	0.457	5.26	7.28
5/5/2020	t	14.71	0.456	7.68	7.29
6/23/2020	b	21.9	0.392	3.73	7.98
6/23/2020	t	22.3	0.393	3.66	7.98
7/21/2020	b	24.37	0.377	5.11	8.14
7/21/2020	t	24.52	0.374	4.34	8.14
9/22/2020	b	17.77	0.401	6.42	7.99
9/22/2020	t	18.42	0.398	6.06	8.01

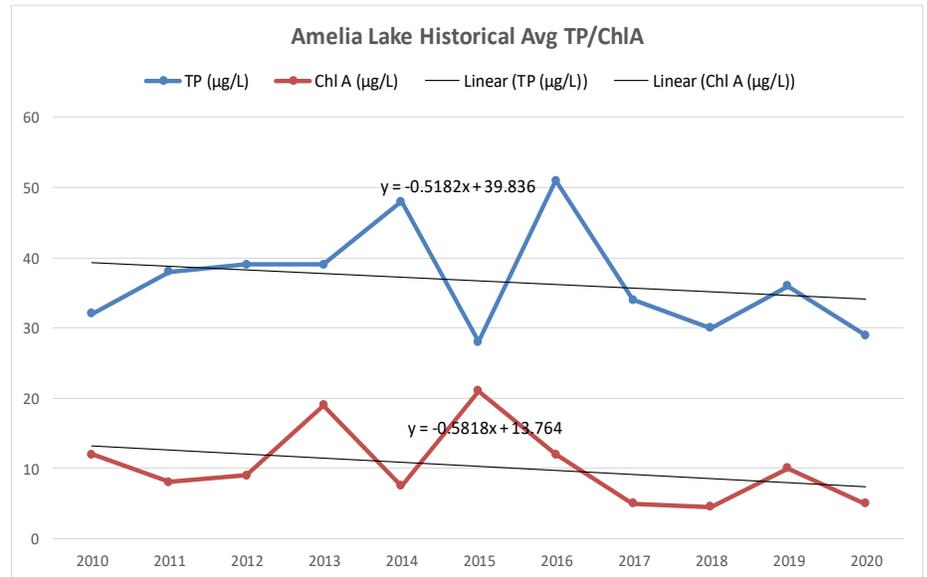

- YSI parameters are good for Amelia Lake, no signs of concern. Red values indicate averages above state standard. Amelia has been below state standard for last 10 years with downward trend for both TP and ChlA

AMELIA LAKE


SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
amelia	4/27/2020								64
amelia	5/5/2020	3	13	< 0.003	8.01	0.893	< 0.06	< 0.03	
amelia	5/26/2020	3	38	< 0.003	10.1				
amelia	6/9/2020	3.5	23	< 0.003	3.43	0.761	< 0.06	< 0.03	
amelia	6/23/2020		30	< 0.003	3.67				
amelia	7/7/2020	3.5	60	0.004	8.77	1.32	0.119	< 0.03	
amelia	7/21/2020	4	30	< 0.003	7.25				
amelia	8/11/2020	4	23	< 0.003	3.2	0.881	< 0.06	< 0.03	
amelia	8/25/2020	4	30	< 0.003	5.72				
amelia	9/8/2020	4.5	22	< 0.003	2.08	0.935	< 0.06	< 0.03	
amelia	9/22/2020	4	20	< 0.003	1.6				

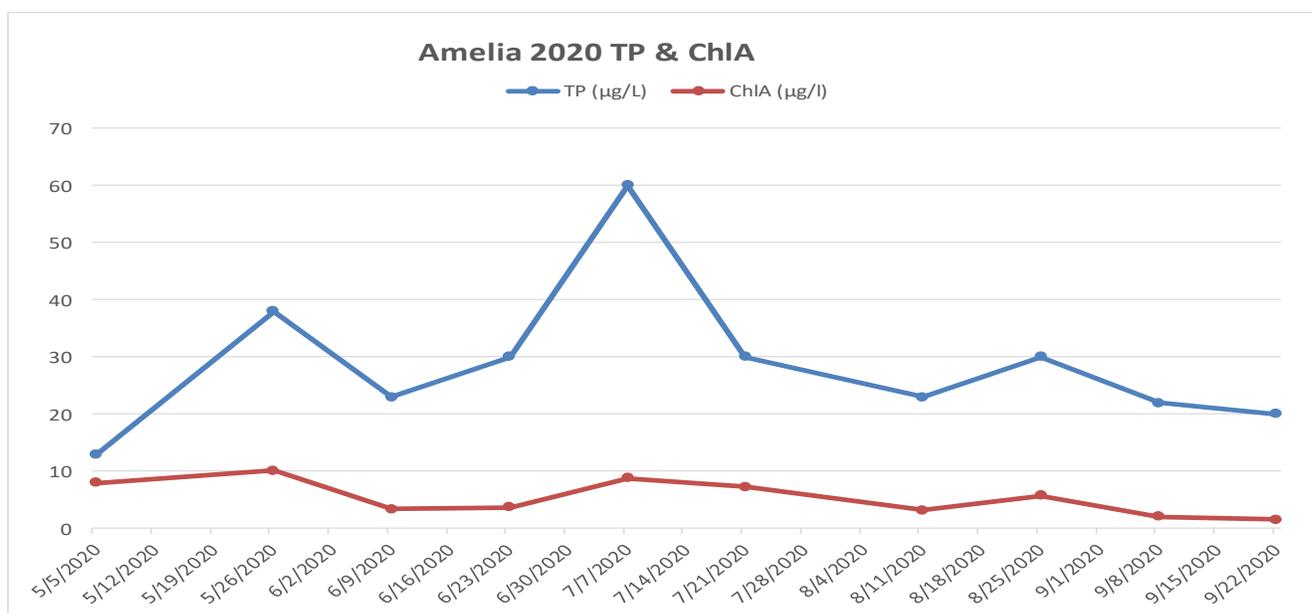

- Nitrogen and ammonia levels are well below state standards for Amelia Lake as well as chloride.


BLACK LAKE

Black Lake is located in North Oaks. There is very little developed land or roads around the lake. The lake is about 10 acres and has a maximum depth of 12 feet. VLAWMO began to monitor Black Lake in 2009. Black Lake is also one of, if not the only lake left within VLAWMO that has a significant population of wild rice. Access to the lake is minimal and the lake is surrounded by private property, is very isolated and has a large wetland fringe. Black Lake is one of the healthiest lakes within VLAWMO with all lake nutrient parameters well below the state standards.

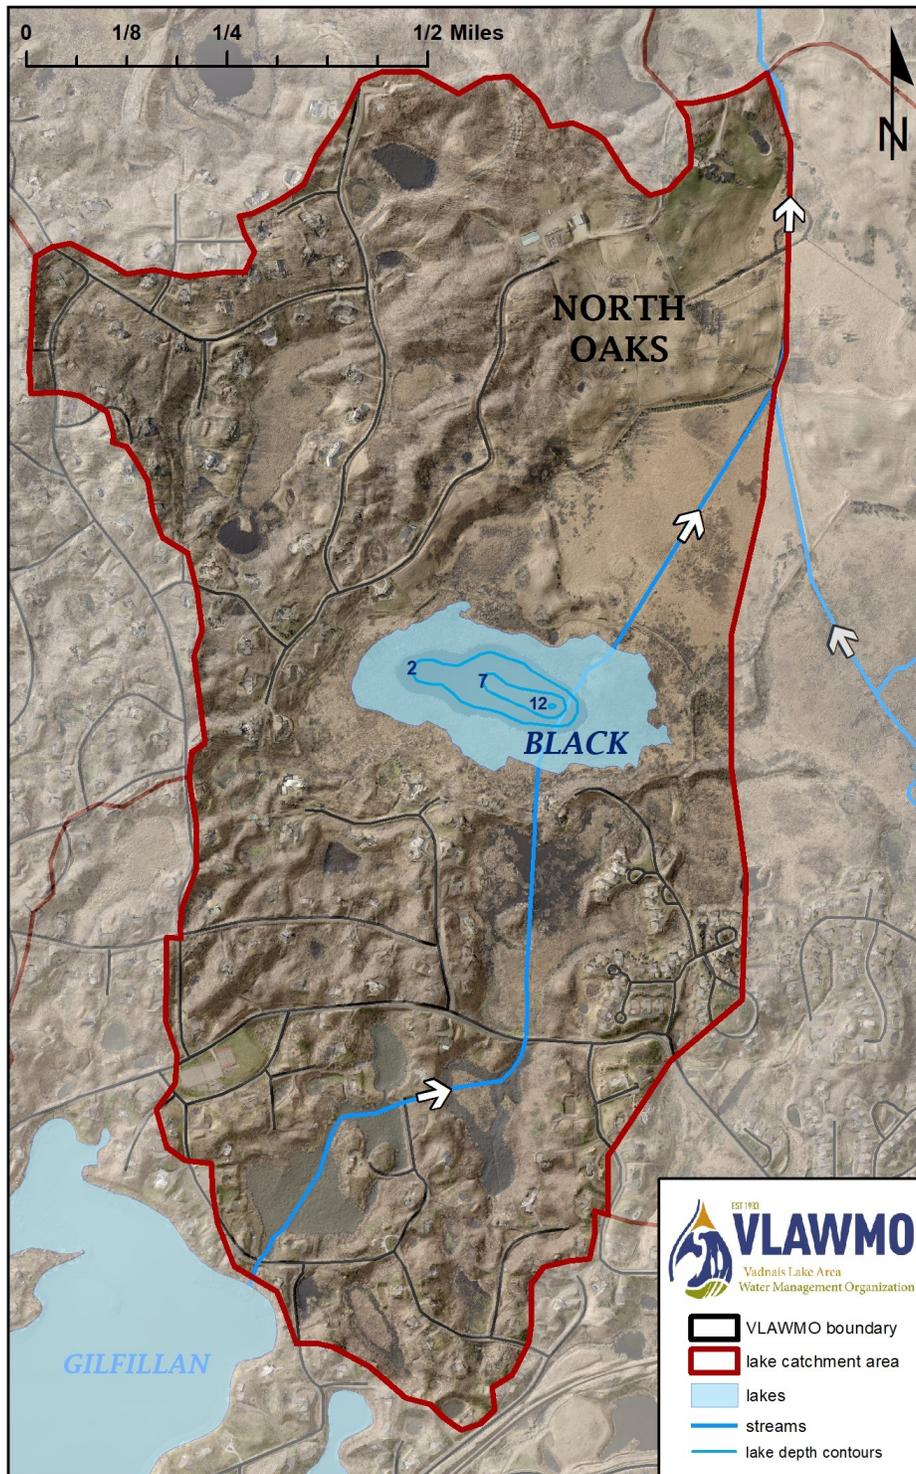

BLACK LAKE


Black Lake Historical Avg TP/Chl A/SDT				Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
Year	TP (µg/L)	Chl A (µg/L)	Secchi (m)						
				5/5/2020	b	14.92	0.301	6.6	7.16
2009	23	5.9	2	5/5/2020	m	15.13	0.302	6.27	7.2
2010	34	6.6	2.1	5/5/2020	t	15.49	0.302	6.21	7.22
2011	44	6.9	2.3	6/23/2020	b	14.32	0.394	0.74	7.47
2012	31	6	2.4	6/23/2020	m	19.03	0.292	5.21	7.48
2013	32	6	2	6/23/2020	t	23.07	0.259	5.48	7.61
2014	21	8	2	7/21/2020	b	14.82	0.302	6.51	7.61
2015	18	14	1.6	7/21/2020	m	16.19	0.288	5.82	7.63
2016	17	4	2	7/21/2020	t	25.61	0.287	5.48	7.78
2017	18	3	2.1	9/22/2020	b	14.56	0.349	2.13	7.82
2018	34	6	2	9/22/2020	m	16.12	0.34	4.96	7.79
2019	24	3	2.2	9/22/2020	t	17.33	0.341	5.35	7.76
2020	25	4	2						

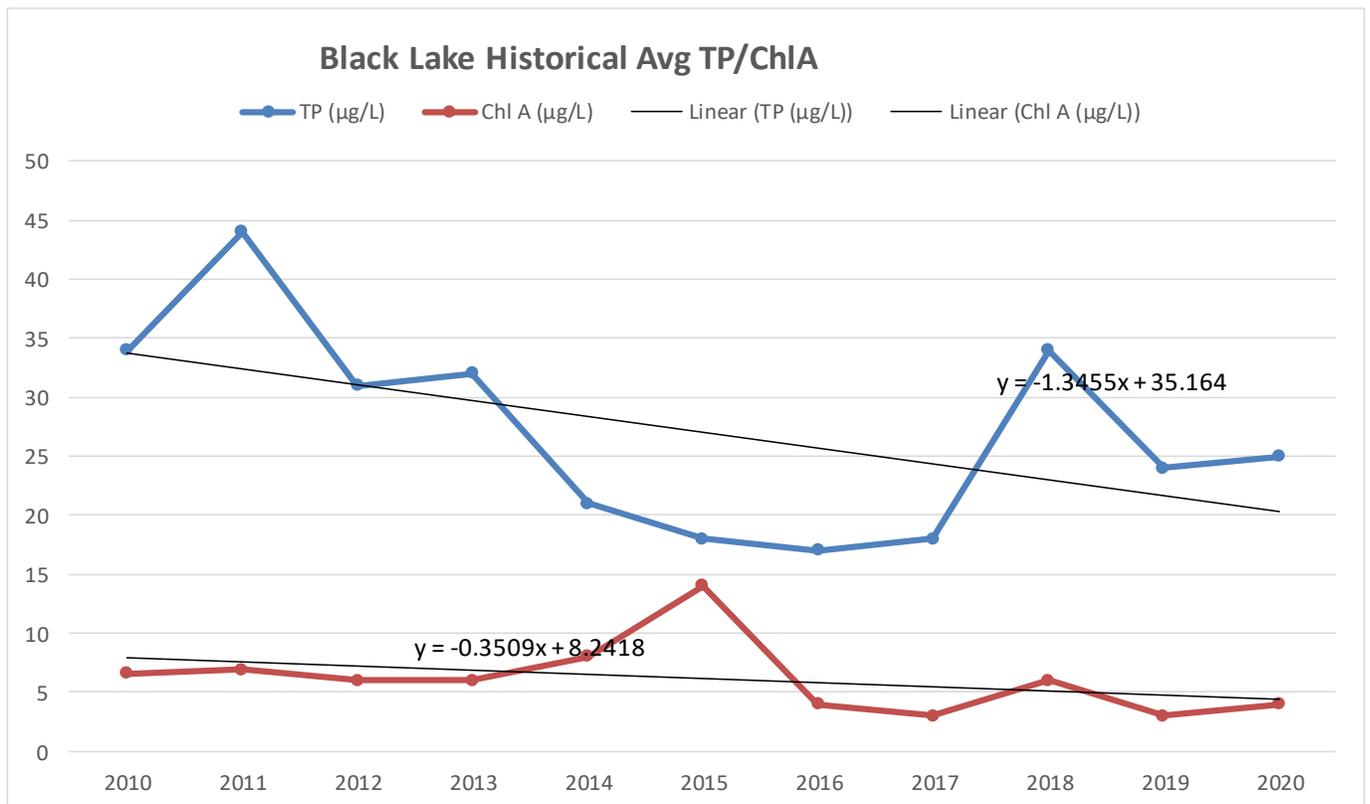

- Black Lake YSI parameters are very good for this type of lake. Black Lake is around 12 ft deep and does show some signs of stratification. Downward trend for both TP and Chl A.

BLACK LAKE


SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
black	4/27/2020								25
black	5/5/2020	6	15	< 0.003	3.56	0.69	< 0.06	< 0.03	
black	5/26/2020	6.5	16	0.003	< 1				
black	6/9/2020	7	21	0.005	< 1	0.546	< 0.06	< 0.03	
black	6/23/2020		21	< 0.003	1.34				
black	7/7/2020	5	34	0.009	1.07	0.723	0.102	< 0.03	
black	7/21/2020	7	39	0.014	1.6				
black	8/11/2020	7	39	0.006	5.34	2.52	0.228	< 0.03	
black	8/25/2020	5	27	0.005	8.01				
black	9/8/2020	4.5	26	0.006	5.72	0.924	< 0.06	< 0.03	
black	9/22/2020	6.5	12	0.006	3.56				

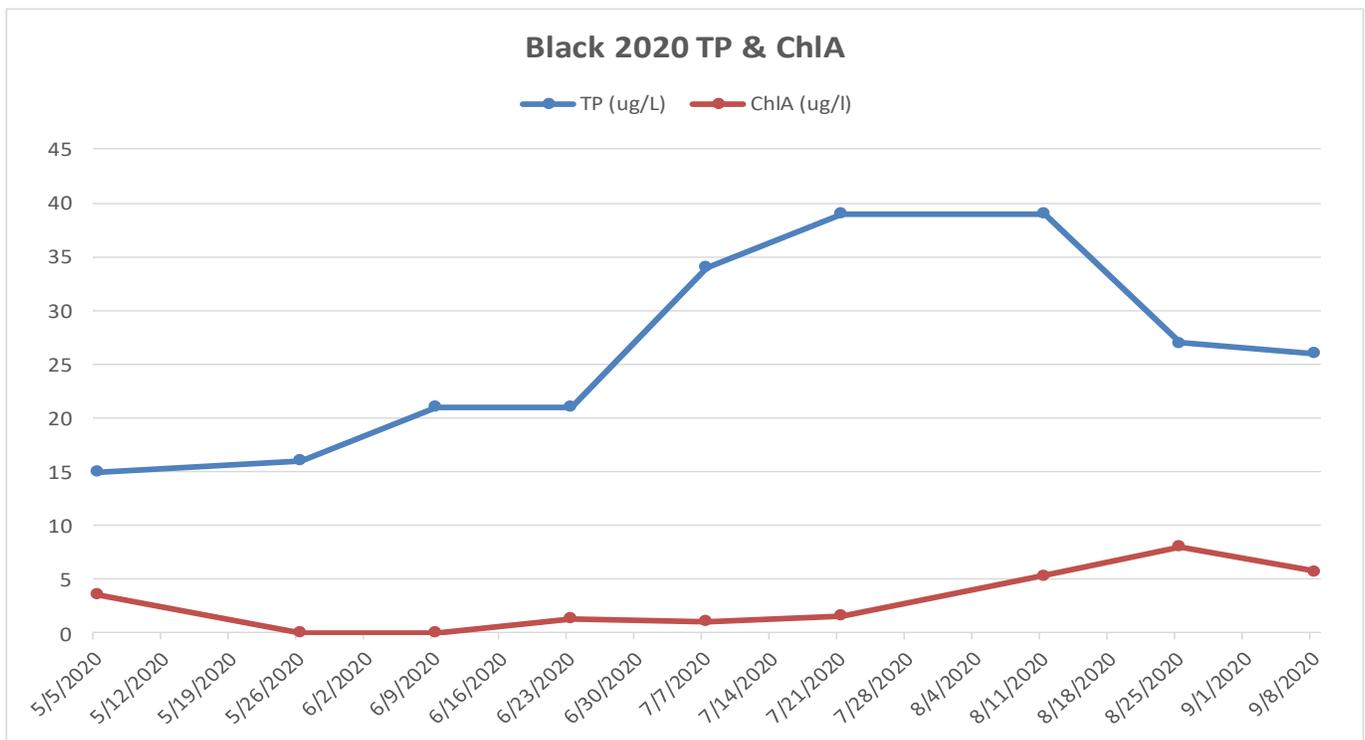

- Nitrogen and ammonia levels are well below state standards for Black Lake as well as chloride

BIRCH LAKE


Birch Lake is located within the City of White Bear Lake and is 127 acres with a maximum depth of 6 feet. Land is completely developed around Birch Lake and there are 4 main storm sewer inlets around the lake as well as other storm inlets. Birch Lake is a rare find in the metropolitan area because of its clarity and water quality. Results of ChIA and TP are very low for such an urbanized water body. TP and ChIA have had a slight down trend the last 16 years. This is good to see especially for a metro lake because it suggests that runoff from the surrounding watershed entering the lake is also low in nutrient levels and pre-treated. Birch Lake experienced a winter fish kill in 2014. Fish survey completed fall of 2014 did not show much change to the fish population from the 2011 survey except for a lack of largemouth bass in 2014. A lake vegetation survey was also completed in 2015.

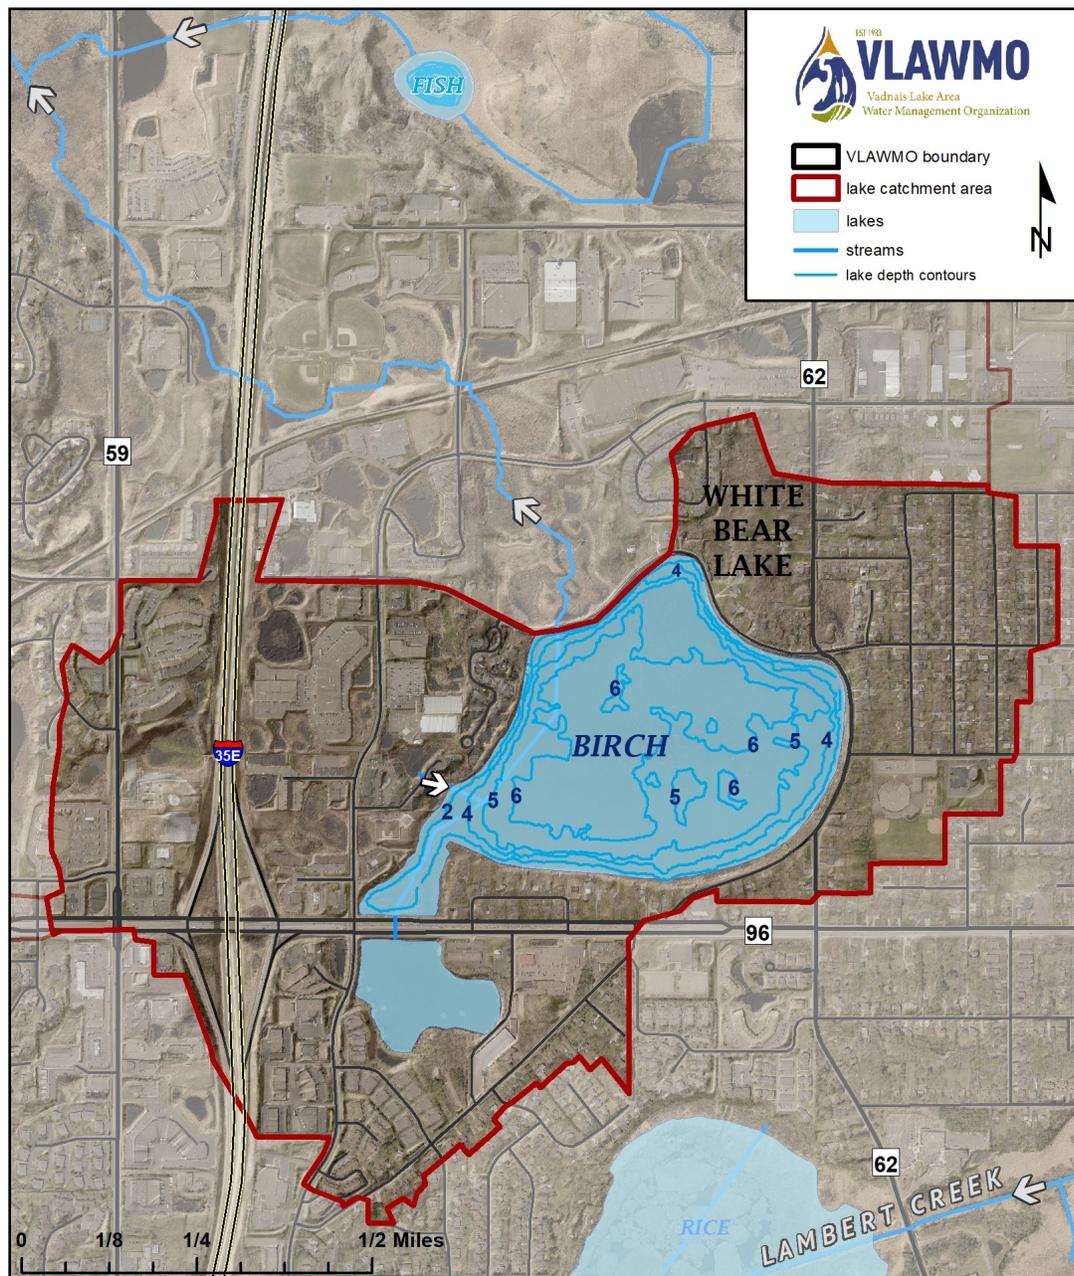

BIRCH LAKE

Birch Lake Historical Avg TP/Chl A/SDT			
Year	TP (µg/L)	Chl A (mg/m ³)	Secchi (m)
1997	22	14	2.4
1998	41	4	2.4
1999	31	8	2.4
2000	27	14	2.4
2001	42	8	2.4
2002	31	10	2.4
2003	35	13	2.4
2004	31	0	2.4
2005	31	4	2.4
2006	32	3	2.4
2007	41	5	2.4
2008	34	5	1.2
2009	40	8	1.1
2010	31	5	1
2011	29	3	2
2012	30	3	2
2013	30	3	2
2014	26	3	1.7
2015	21	1	1.7
2016	14	7	1.8
2017	28	8	1.8
2018	25	5	1.8
2019	18	3	2
2020	18	3	2


Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (cm)	DO (mg/L)	pH
5/5/2020	b	15.32	0.425	7.98	7.41
5/5/2020	t	15.33	0.426	7.35	7.37
6/23/2020	b	22.96	0.45	6.18	8.31
6/23/2020	t	23.13	0.45	5.56	8.36
7/21/2020	b	25.64	0.455	4.83	8.36
7/21/2020	t	25.81	0.456	4.61	8.37
9/22/2020	b	16.69	0.477	6.85	8.36
9/22/2020	t	17.1	0.478	6.94	8.35

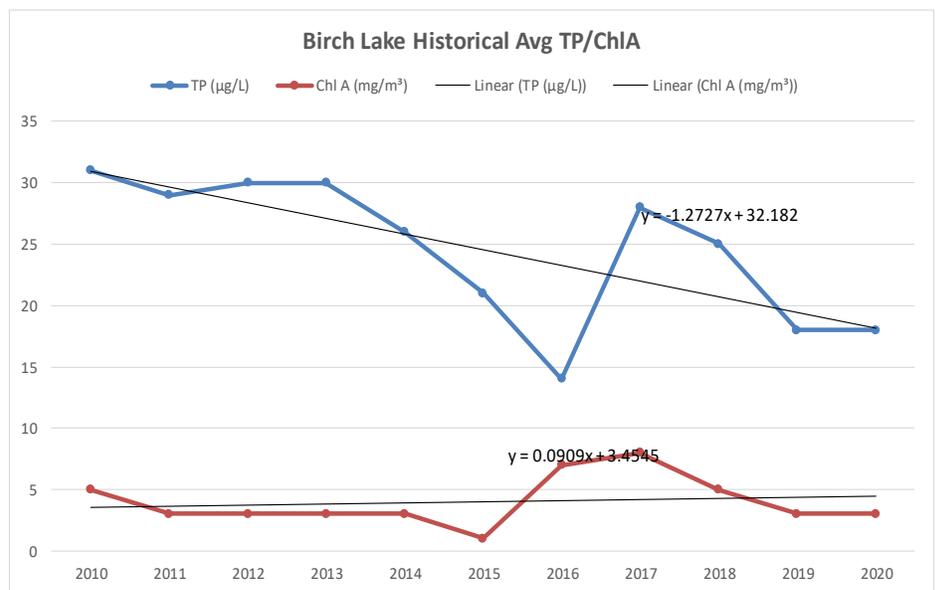

- Secchi reading for Birch is to lake bottom at sample site. Can see to bottom of lake throughout
- YSI parameters are very good for Birch Lake. Conductivity is on the high side but not unusual for a metro lake. This is most likely due to the amount of road runoff that enters Birch Lake. .

BIRCH LAKE


SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
Birch	4/27/2020								100
Birch	5/5/2020	5	7	< 0.003	2.37	0.454	< 0.06	< 0.03	
birch	5/26/2020	5	22	< 0.003	1.19				
birch	6/9/2020	7	18	< 0.003	1.19	0.463	< 0.06	< 0.03	
birch	6/23/2020		22	< 0.003	1.07				
Birch	7/7/2020	6	18	< 0.003	4.2	0.499	< 0.06	< 0.03	
Birch	7/21/2020	6	22	< 0.003	4.2				
Birch	8/11/2020	6	24	< 0.003	8.54	0.809	< 0.06	< 0.03	
birch	8/25/2020	6	18	< 0.003	3.81				
Birch	9/8/2020	6	17	< 0.003	2.67	0.828	< 0.06	< 0.03	
birch	9/22/2020	6	14	< 0.003	1.52				

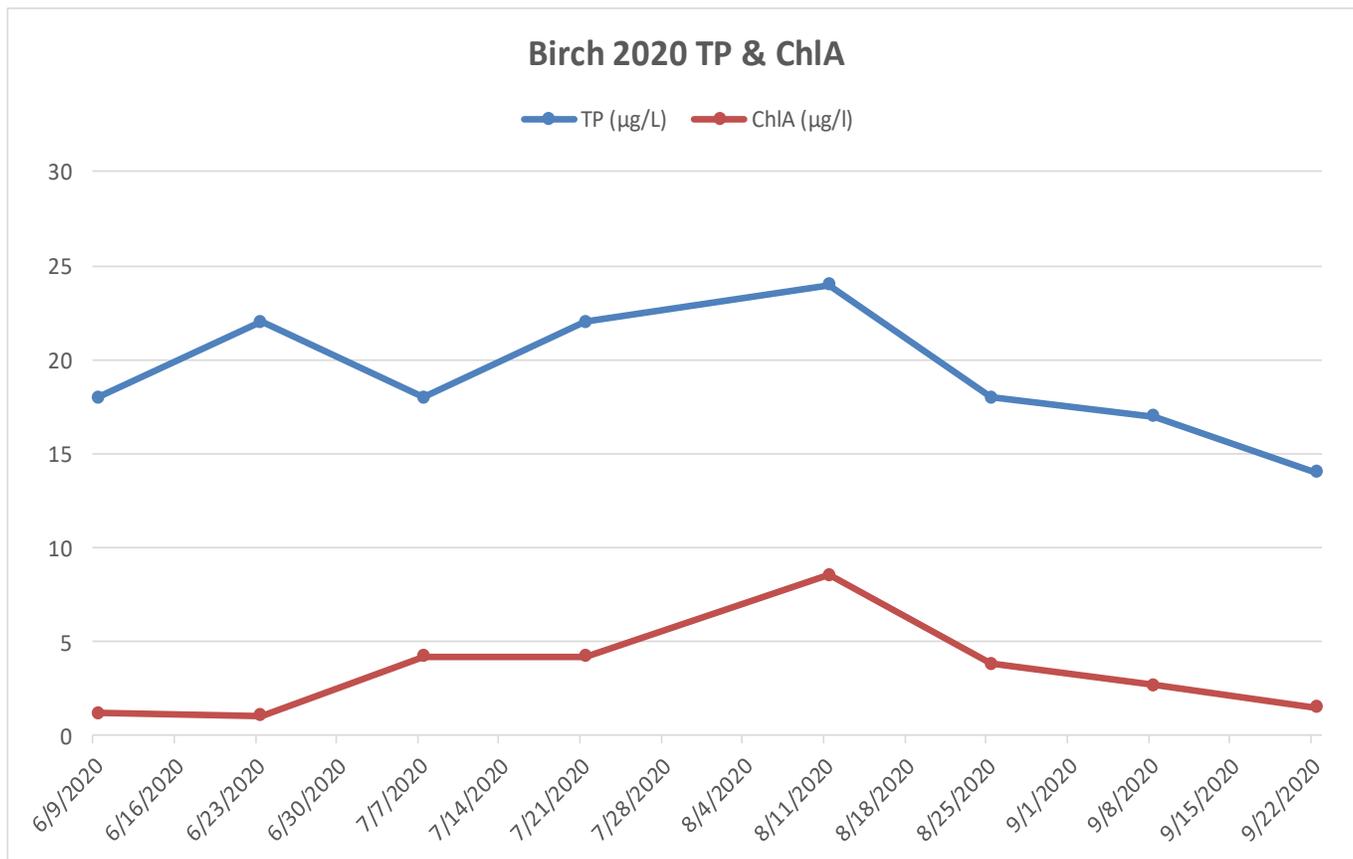

- Nitrogen and ammonia levels are well below state standards for Birch Lake. Nutrient readings similar to 2019

CHARLEY LAKE

Water is pumped from the Mississippi River to Charley Lake via a 60 inch 8 mile long pipe from a pumping station in Fridley. An average of 32 million gallons of water is pumped into Charley Lake each day. Charley Lake is the start of the chain of lakes controlled by the St. Paul Water Utility. This chain of lakes supplies drinking water for more than 400,000 customers. Most of the drinking water is coming from the Mississippi River, while some comes from wells to help cool the water and reduce treatment costs. VLAWMO began sampling Charley in 2009.

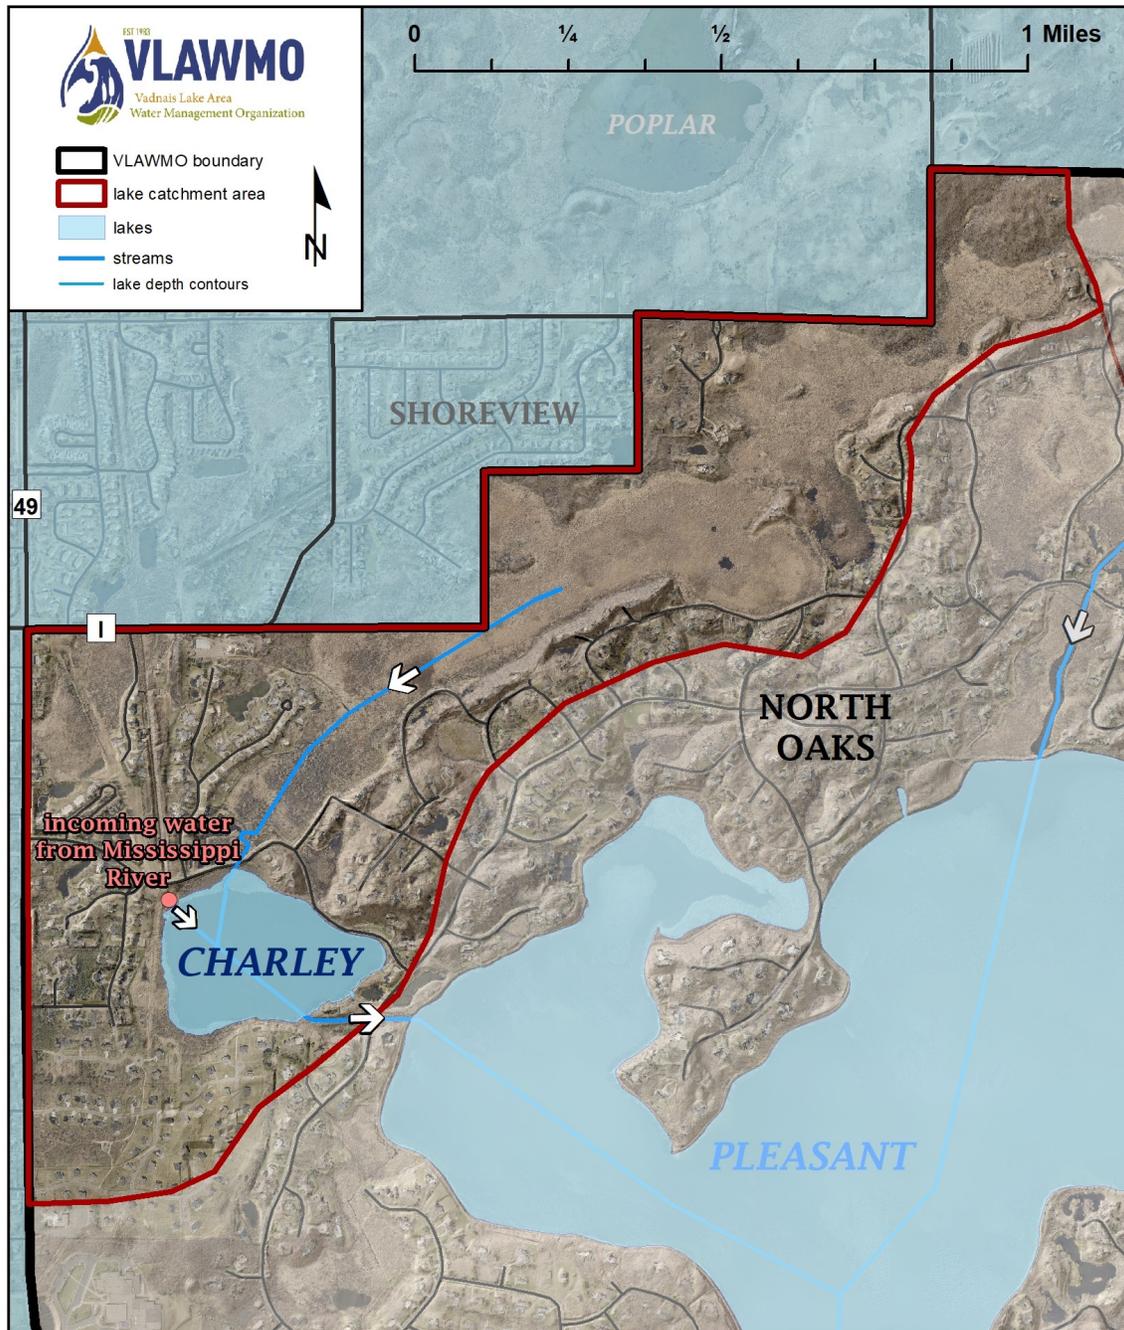


CHARLEY LAKE




Charley Lake Historical Avg TP/Chl A/SDT			
Year	TP (µg/L)	Chl A (µg/L)	Secchi (m)
2009	39	18	1
2010	90	18.9	1
2011	87	9.3	1.1
2012	74	13	1
2013	57	11	1
2014	59	10	1.1
2015	57	14	1.1
2016	78	10	1.2
2017	54	10	1.2
2018	78	14	1.5
2019	60	7	1.6
2020	52	7	1.3

Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
5/5/2020	b	15.25	0.315	9.33	7.45
5/5/2020	t	15.30	0.315	7.99	7.45
6/23/2020	b	22.87	0.424	4.82	7.72
6/23/2020	t	23.63	0.421	4.86	7.76
7/21/2020	b	27.43	0.382	6.33	7.89
7/21/2020	t	27.78	0.375	5.41	7.9
9/22/2020	b	16.27	0.391	7.43	7.89
9/22/2020	t	17.41	0.374	6.84	7.81

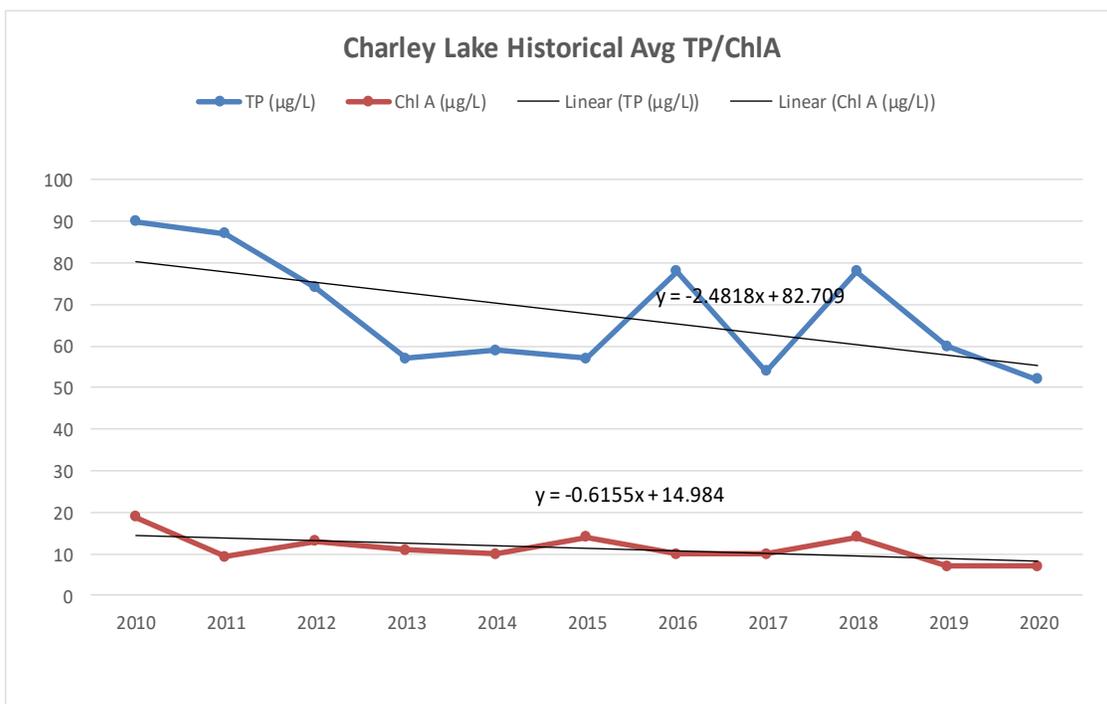

CHARLEY LAKE


SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
charley	4/27/2020								10
charley	5/5/2020	3	35	0.003	10.1	0.639	< 0.06	0.067	
charley	5/26/2020	3.5	39	< 0.003	6.1				
charley	6/9/2020	4	52	0.008	8.39	0.747	< 0.06	0.34	
charley	6/23/2020		58	0.025	4.96				
charley	7/7/2020	5	78	0.045	5.34	0.793	0.091	0.688	
charley	7/21/2020	4	68	0.036	8.39				
charley	8/11/2020	3.5	52	< 0.003	8.68	0.631	< 0.06	0.367	
charley	8/25/2020	3.5	62	0.03	8.54				
charley	9/8/2020	4	53	0.025	5.02	0.641	< 0.06	0.314	
charley	9/22/2020	4.5	26	0.009	5.34				

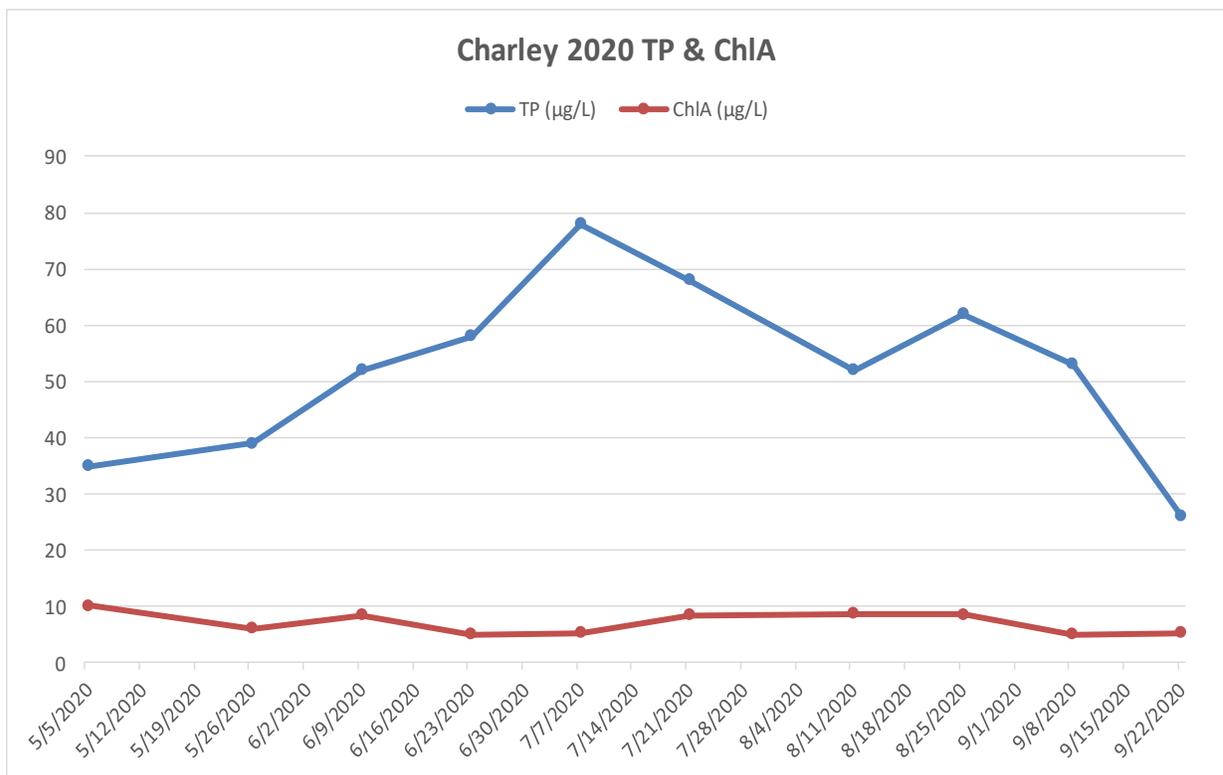

- Charley Lake YSI parameters are good. There is a constant flow of millions of gallons of Mississippi river water through Charley Lake year round and with that these parameters seem consistent with normal metro lakes. TP levels were higher than state standard of 40ug/l for deep lakes
- Nitrogen and ammonia levels are below state standards for Charley Lake. NO3 levels are higher in Charley compared to the rest of VLAWMO lake and is most likely due to the Mississippi water that is pumped through the lake


DEEP LAKE

Deep lake is a little over 80 acres and sits between and is hydro logically connected to Wilkinson Lake to the north and Pleasant Lake to the south. A channel connects the three lakes. All VLAWMO lakes are tested for nitrogen's and ammonia and Deep lake year over year tends to have the highest concentrations, although they are still below the standards. TP and ChIA have been trending slowly down since sampling began in 2009. By mid to late summer Deep Lake is very weedy and this has been a concern for residents along with the high

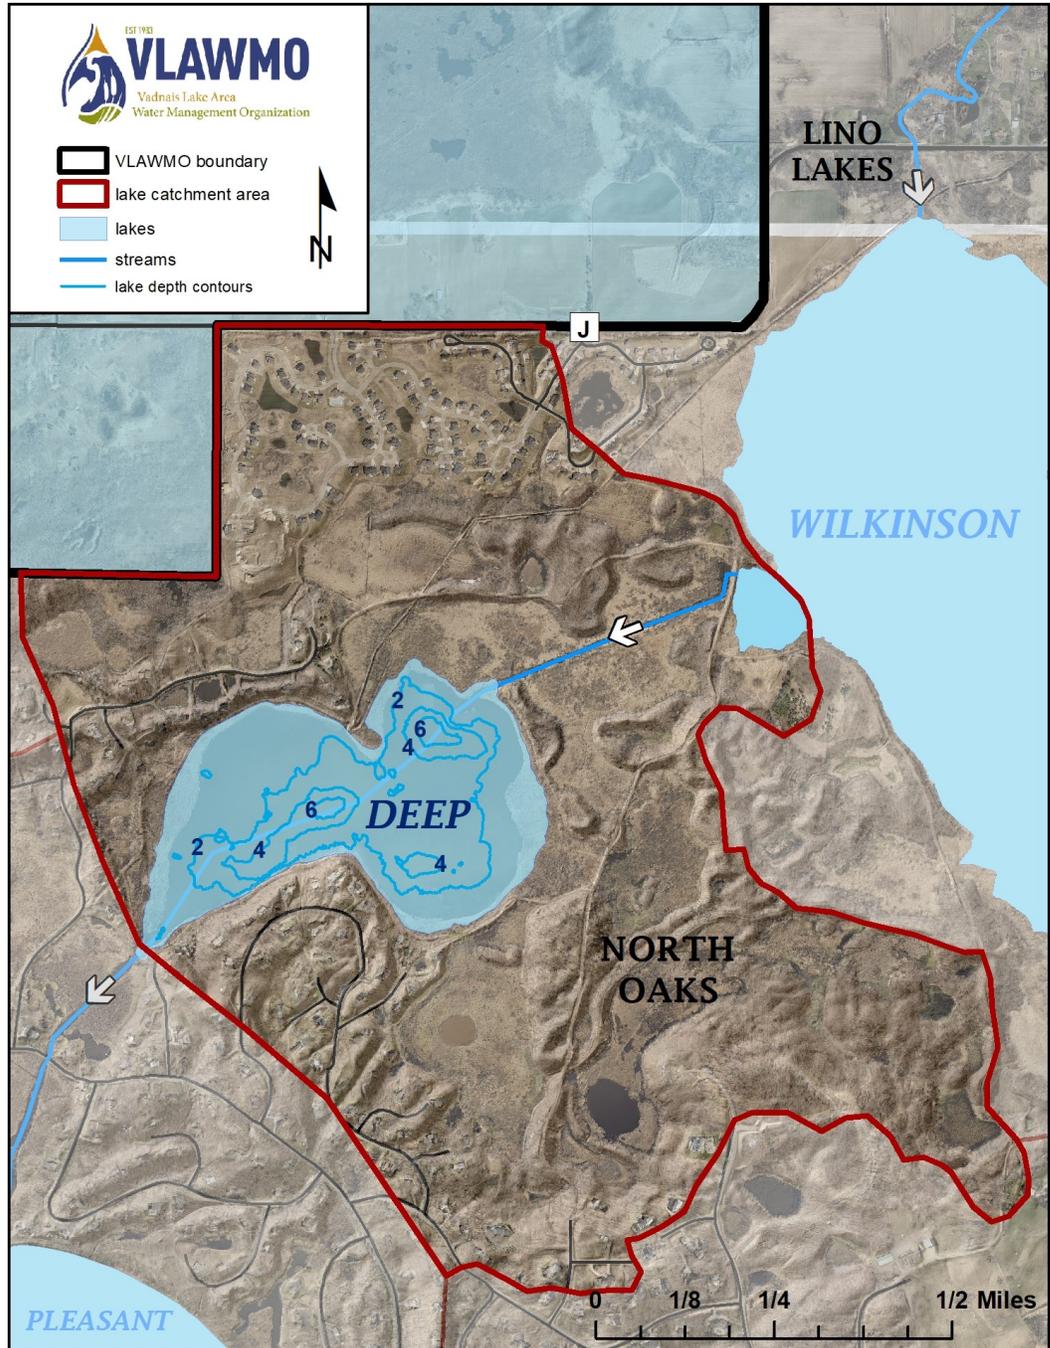

DEEP LAKE

Deep Lake Historical Avg TP/Chl A/SDT				Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
Year	TP (µg/L)	Chl A (mg/m³)	Secchi (m)						
				5/5/2020	b	15.48	0.42	8.53	7.24
2009	112	21	1	5/5/2020	t	15.55	0.419	7.57	7.32
2010	55	15	0.9	6/23/2020	b	23.11	0.408	4.24	7.69
2011	95	12	1.2	6/23/2020	t	23.9	0.404	4.98	7.73
2012	87	12	1	7/21/2020	b	22.96	0.428	2.42	7.94
2013	121	21	1	7/21/2020	t	23.34	0.414	1.97	7.92
2014	136	13	1.1	9/22/2020	b	15.54	0.346	4.22	7.78
2015	89	23	1	9/22/2020	t	18.84	0.343	5.78	7.79
2016	76	8	1.1						
2017	84	9	1.1						
2018	97	23	1.3						
2019	68	8	1.4						
2020	72	8	1.4						

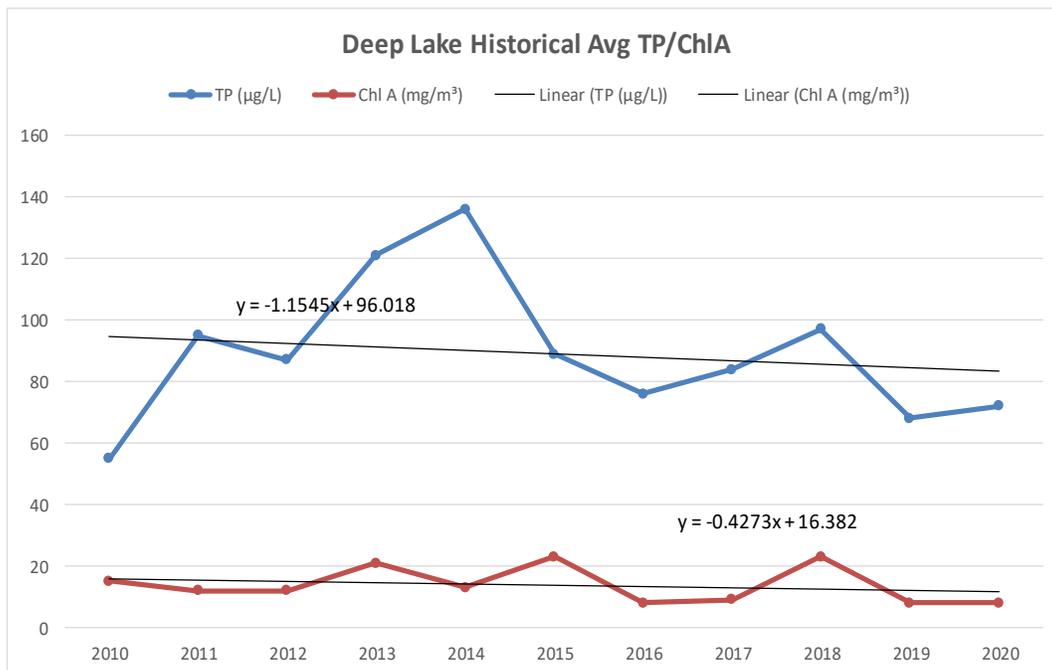

- Deep Lake YSI data is similar to that of Charlie Lake. Conductivity is on the high side. TP levels are very high with very low ChlA levels. This is unusual, TP and ChlA levels usually reflect each other, High TP = High ChlA, Low TP = Low ChlA. Charley is very weedy and this may be reducing the ChlA levels.

DEEP LAKE

SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
deep	4/27/2020								50
deep	5/5/2020	3	48	0.003	15.1	0.905	< 0.06	< 0.03	
deep	5/26/2020	3	87	0.008	17.4				
deep	6/9/2020	3.5	103	0.044	7.48	1.16	< 0.06	< 0.03	
deep	6/23/2020		87	0.019	9.54				
deep	7/7/2020	5	85	0.036	2.14	0.744	< 0.06	< 0.03	
deep	7/21/2020	4	92	0.039	3.74				
deep	8/11/2020	3.5	72	0.025	2.14	0.639	< 0.06	< 0.03	
deep	8/25/2020	3.5	63	0.022	7.48				
deep	9/8/2020	4	54	0.014	9.01	1.09	< 0.06	< 0.03	
deep	9/22/2020	5	33	0.008	1.91				




- Nitrogen and ammonia levels are below state standards for Deep Lake

GEM LAKE

Gem Lake is within the City of Gem Lake and has no public access. It is 25 acres in size and is 17 feet deep. There has been development along portions of the lake in recent years. In 2000, volunteers noticed a distinct algae bloom and noted that water clarity was getting poorer. Over the 22 years of monitoring data there is a down trend in TP and ChIA levels.


Gem Lake has also been included on the Lambert Creek TMDL study for nutrient impairment. Recent years of monitoring data have shown a reduction in nutrient levels to below state standards.

MNDOT's Hwy 61 ditch work in 2011 improved the water quality going into Gem Lake. In 2018 Gem Lake was delisted from the MN PCA's impaired waters list.

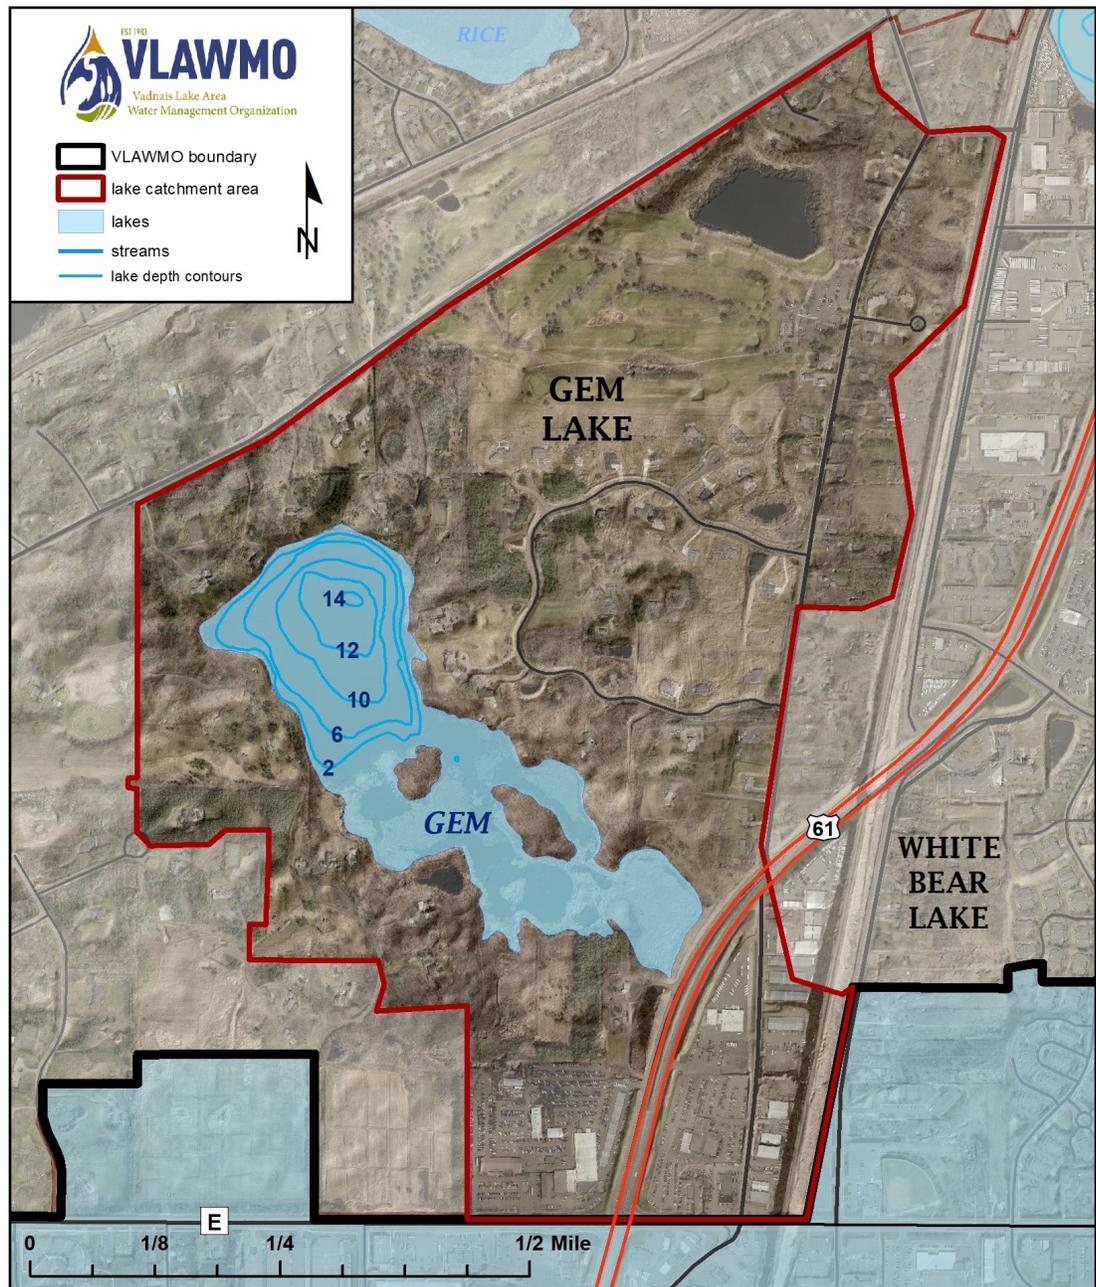

GEM LAKE


Gem Lake Historical Avg TP/Chl A/SDT				Date	Reading Depth (Bottom/Middle/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
Year	TP (µg/L)	Chl A (mg/m ³)	Secchi (m)						
				5/5/2020	b	9.01	0.192	7.1	6.5
1997	54	23	1.2	5/5/2020	m	12.48	0.193	6.76	6.79
1998	33	24		5/5/2020	t	14.82	0.196	7.61	6.95
1999	26	16	1.2	6/23/2020	b	13.96	0.203	0.56	7.54
2000	36	17	1.1	6/23/2020	m	22.73	0.2	5.15	7.63
2001	56	12	1.8	6/23/2020	t	22.95	0.2	5.63	7.65
2002	39	25	1.3	7/21/2020	b	15.05	0.258	0.43	7.68
2003	52	20	1.4	7/21/2020	m	22.19	0.203	0.48	7.69
2004	49	0	1.5	7/21/2020	t	26.14	0.2	3.65	7.66
2005	43	26	0	9/22/2020	b	16.64	0.208	4.77	8.04
2006	63	25	0	9/22/2020	m	17.21	0.208	5.69	8.02
2007	48	33	1.1	9/22/2020	t	17.49	0.208	5.76	8.22
2008	64	17	1.5						
2009	89	28	1.3						
2010	53	24	1.4						
2011	32	6.4	2.1						
2012	41	11	2						
2013	35	17	2						
2014	31	8	2.9						
2015	38	23	2.2						
2016	30	18	1.6						
2017	32	16	1.5						
2018	36	15	1.8						
2019	33	11	1.8						
2020	35	14	2.4						

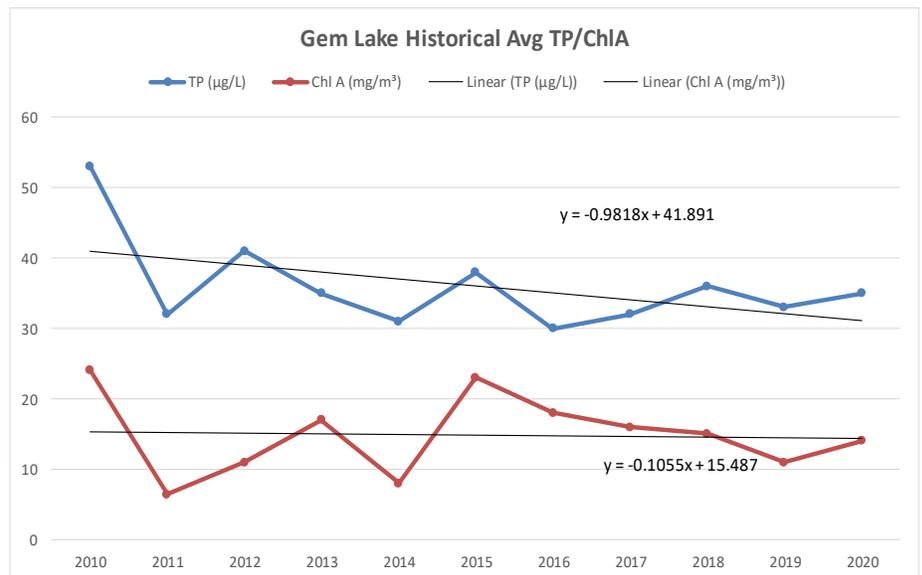

- YSI data is similar to that of other metro lakes. Conductivity is pretty low which is good and usually Gem Lake shows signs of stratification. At 17ft, Gem is one of the deepest lakes VLAWMO monitors. TP and ChlA levels are well below state standards for the 9th year in a row. Hwy 61 was redone in 2011 and MNDOT did work on the ditches along the Hwy. That work seems to have benefited the water quality in Gem

GEM LAKE


SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
gem	4/27/2020								41
gem	5/5/2020	9	26	< 0.003	3.56	0.728	< 0.06	< 0.03	
gem	5/26/2020	10	27	< 0.003	5.87				
gem	6/9/2020	10	34	< 0.003	4.15	< 0.3	< 0.06	< 0.03	
gem	6/23/2020		41	< 0.003	8.6				
gem	7/7/2020	4.5	29	< 0.003	44.5	0.787	< 0.06	< 0.03	
gem	7/21/2020	6	35	< 0.003	12.6				
gem	8/11/2020	10	30	< 0.003	10.7	0.492	< 0.06	< 0.03	
gem	8/25/2020	9	26	< 0.003	11.2				
gem	9/8/2020	6	46	< 0.003	16.8	0.73	0.06	< 0.03	
gem	9/22/2020	5	52	0.003	19.8				

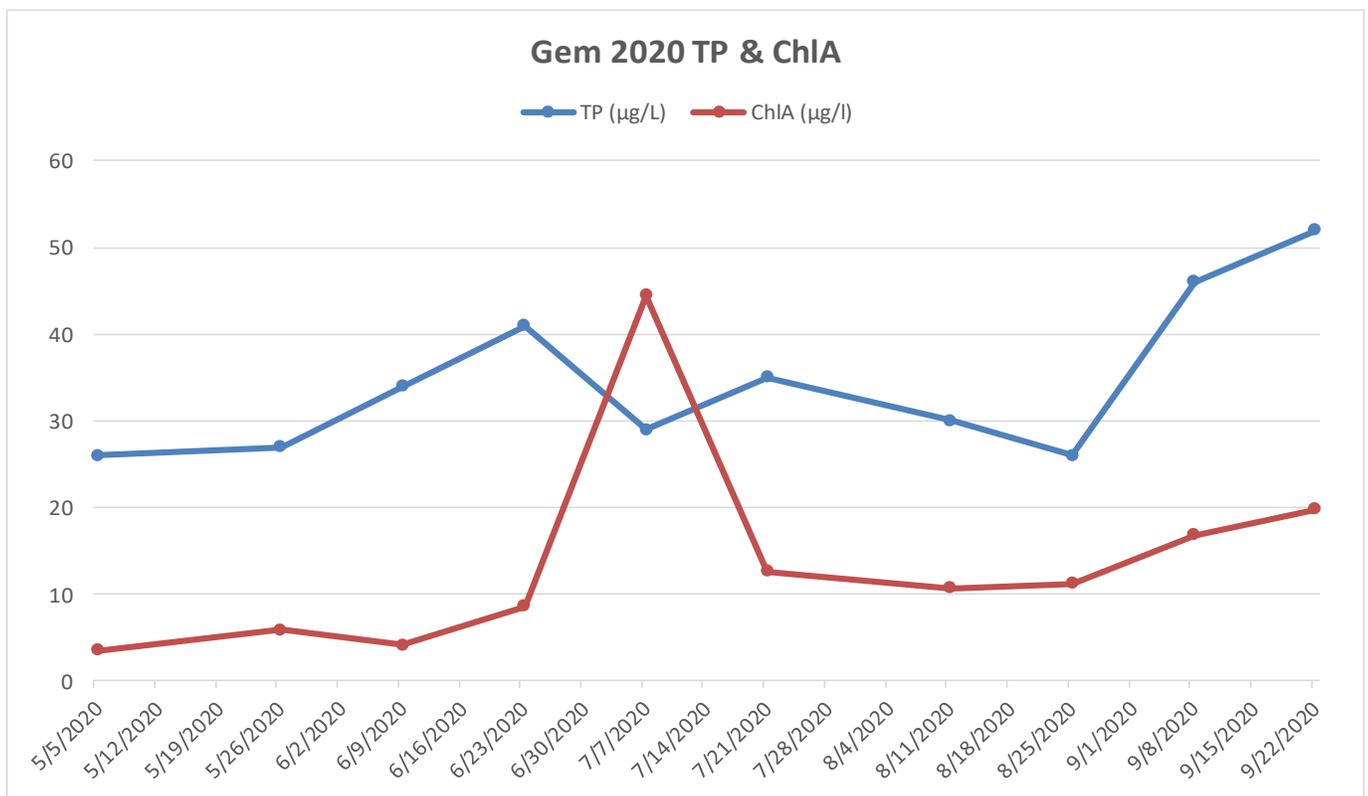

- Nitrogen and ammonia levels are below state standards for Gem Lake.

Gilfillan Lake


Gilfillan Lake is located within the City of North Oaks and is surrounded by homes. It is 110 acres with a maximum depth of 6 feet. The Minnesota Department of Natural Resources has used the lake for walleye stocking nursery in the past. According to available information, there has not been any fish stocking activity for a few years other than homeowners socking minnows. Gilfillan is one of four VLAWMO lakes that are part of the TMDL study due to nutrient impairment. The City of North Oaks and the SPRWS have been pumping water from Pleasant Lake to Gilfillan Lake to increase water levels. The pump, filter and piping were installed fall of 2011, pumping began spring of 2012. The increased water level (about 4.5ft) has significantly reduced nutrient levels in the lake, although they are still above state standards. The pumps have been turned on in the spring the last few years to make sure everything was working properly and were then shut off for the season due to high water. Water level stayed close to the max elevation of 910ft for the summer.

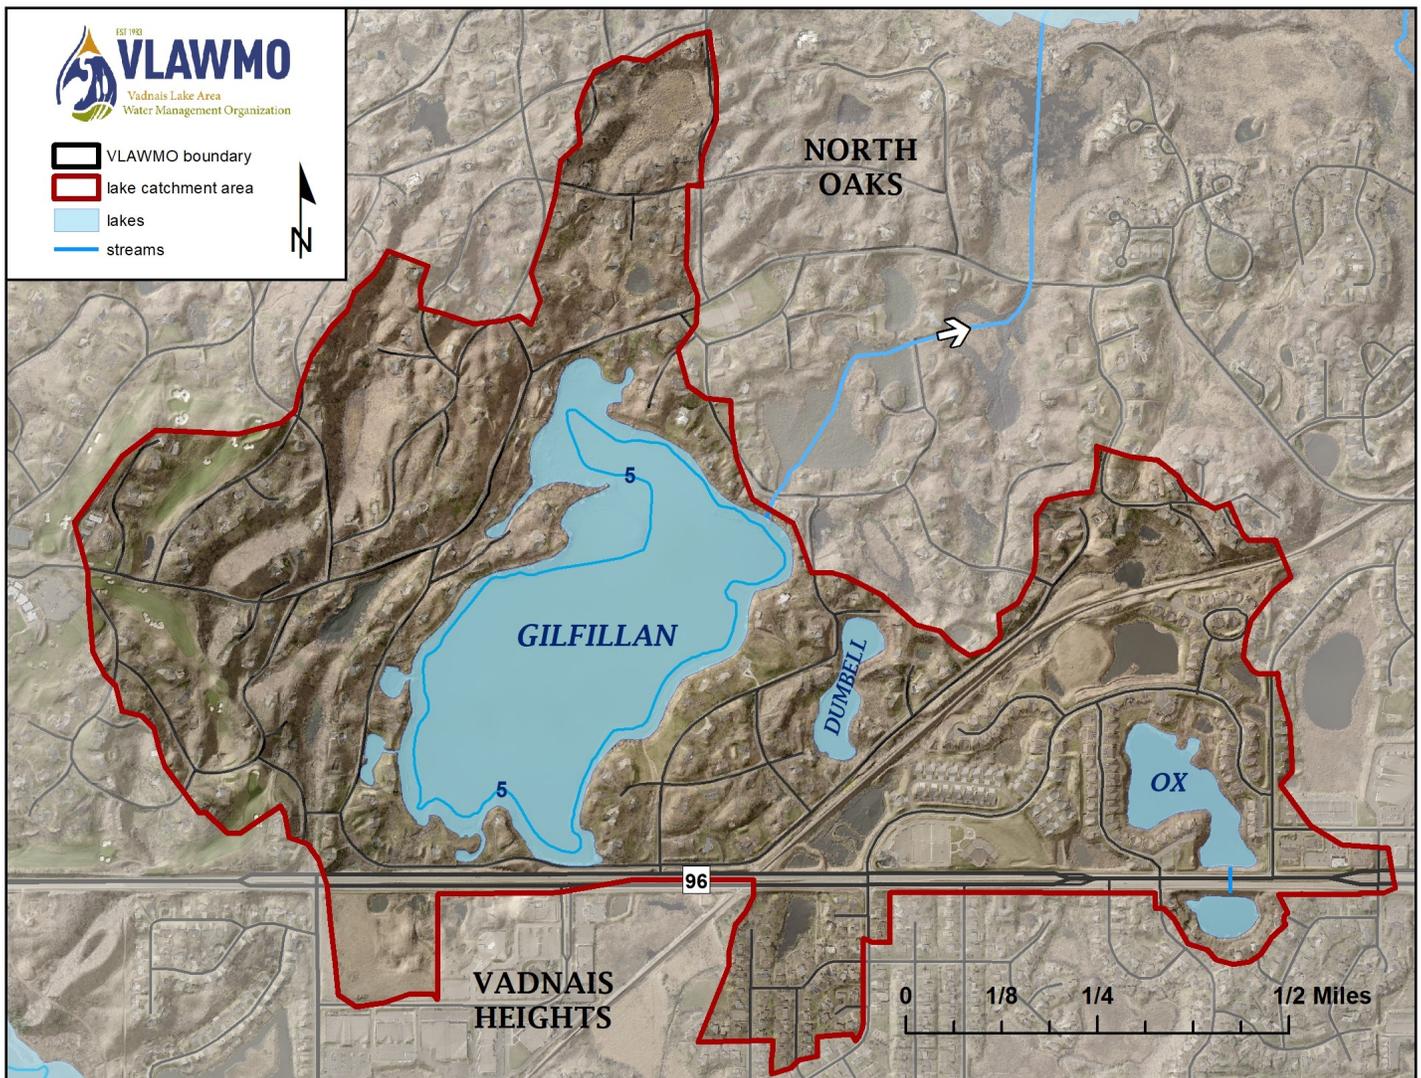

Gilfillan Lake

Gilfillan Lake Historical Avg TP/Chl A/SDT			
Year	TP (µg/L)	Chl A (mg/m ³)	Secchi (m)
1997	96	32	0.5
1998	47	44	0.5
1999	72	23	0
2000	35	47	0
2001	84	20	0
2002	81	43	0.4
2003	44	25	1.4
2004	58	0	0
2005	52	8	0
2006	91	19	0
2007	100	33	0.7
2008	96	31	0.5
2009	152	44	0.4
2010	192	44	0.4
2011	123	25	0.4
2012	70	17	0.8
2013	38	15	1
2014	38	20	0.8
2015	55	36	0.6
2016	48	25	0.7
2017	58	25	0.7
2018	60	43	0.7
2019	56	51	0.6
2020	54	35	0.8

Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
5/5/2020	b	14.81	0.298	4.26	7.03
5/5/2020	t	15.85	0.289	6.89	7.31
6/23/2020	b	23.73	0.301	7.2	7.68
6/23/2020	t	23.8	0.3	5.21	7.75
7/21/2020	b	26.05	0.309	4.08	7.96
7/21/2020	t	26.35	0.309	4.62	7.99
9/22/2020	b	16.53	0.32	7.09	7.77
9/22/2020	t	17.33	0.318	8.02	7.8

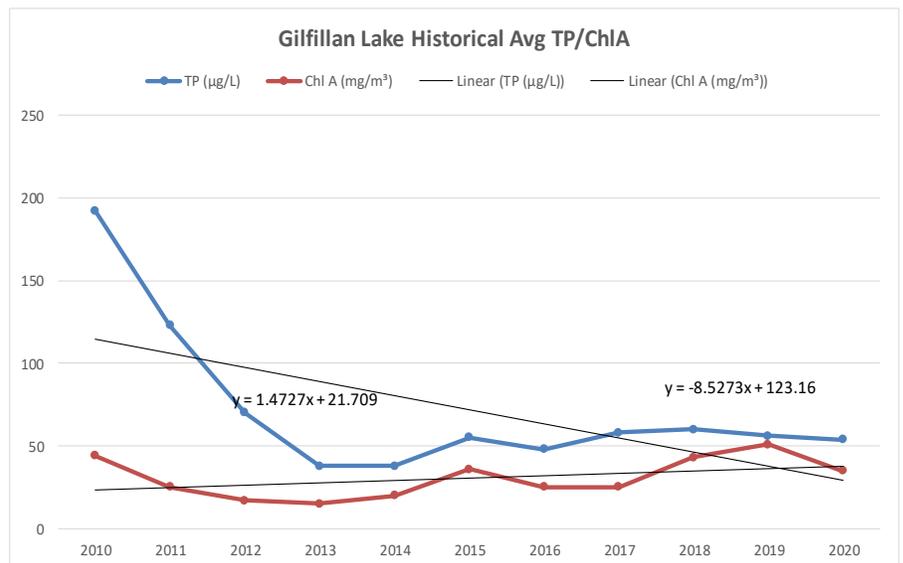


- Gilfillan Lake YSI data is similar to that of other metro lakes. Conductivity is pretty low and is consistent with other lakes that don't receive much or any road runoff. Since augmentation began again in 2012, lake nutrients have dropped substantially. This could very well be due to the 4+ft of Pleasant Lake water added to Gilfillan in 2012. Since 2012 very little augmentation has taken place to the lake due to natural precipitation keeping the lake at the residents desired elevation of around 910ft. Nutrient levels are slightly rising from the lows at the start of augmentation.

-

Gilfillan Lake

SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
gilfillan	4/27/2020								36
gilfillan	5/5/2020	1.5	66	< 0.003	40.9	1.89	< 0.06	< 0.03	
gilfillan	5/26/2020	2.5	43	< 0.003	25.4				
gilfillan	6/9/2020	3	42	< 0.003	25.8	1.27	< 0.06	< 0.03	
gilfillan	6/23/2020		47	0.012	19.2				
gilfillan	7/7/2020	3.5	36	< 0.003	19.2	1.17	< 0.06	< 0.03	
gilfillan	7/21/2020	1.5	57	< 0.003	46.3				
gilfillan	8/11/2020	3	60	< 0.003	49.4	1.49	< 0.06	< 0.03	
gilfillan	8/25/2020	2.5	54	< 0.003	23.6				
gilfillan	9/8/2020	2	80	0.003	62.3	1.77	< 0.06	< 0.03	
gilfillan	9/22/2020	2	55	0.003	32.9				

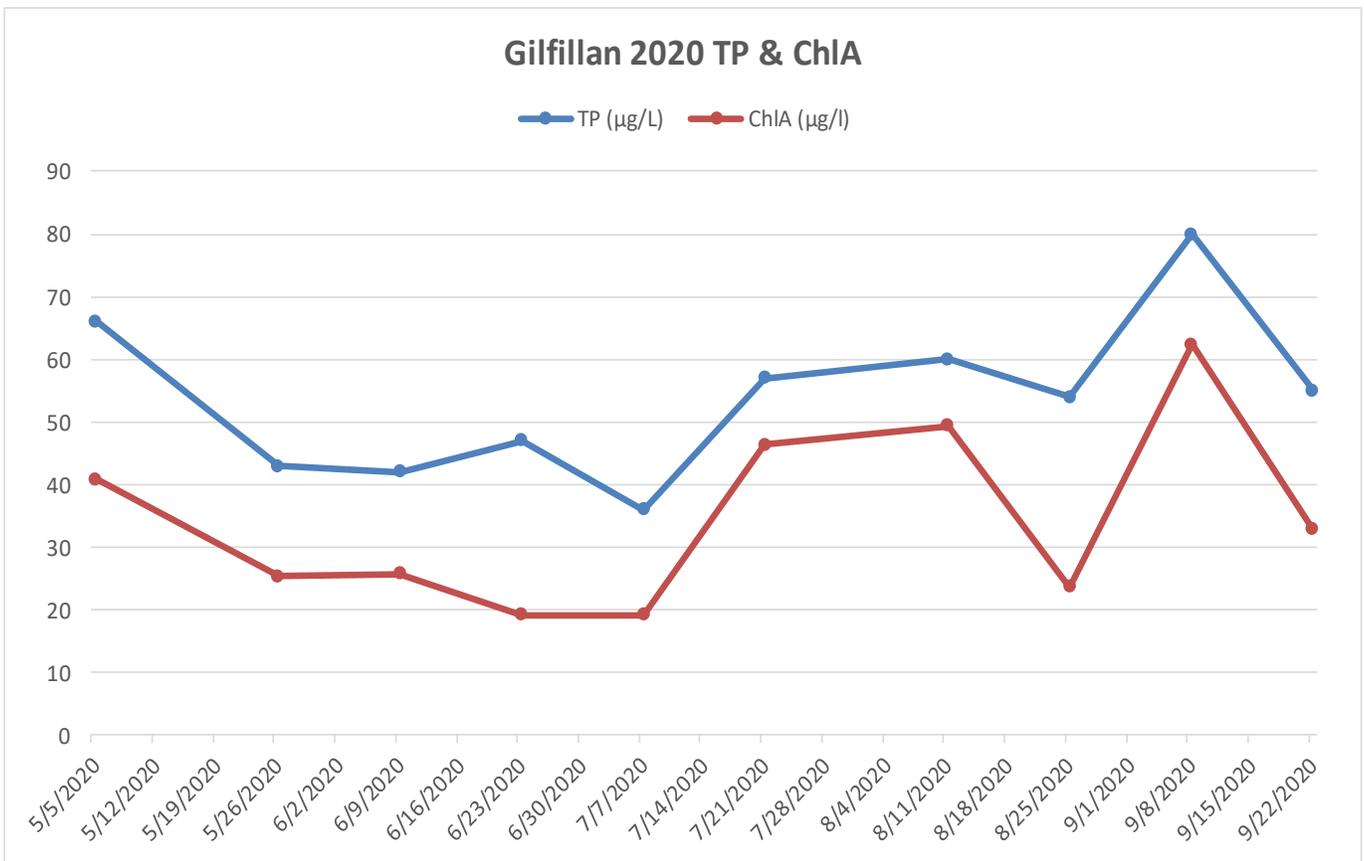

- Nitrogen and ammonia levels are below state standards for Gilfillan Lake

Goose Lake

Goose Lake is located in White Bear Lake and is 145 acres with a maximum depth of 6-8 feet. The land use is largely residential and industrial around the lake and Highway 61 cuts through the lake. The old White Bear Lake sewage treatment plant discharged to Goose Lake for almost 50 years. A sediment study conducted in 1989 found that there was PCB contamination as well as high levels of cadmium, lead, and zinc.


Though the lake is connected via culverts under the highway, VLAWMO began to assess the lake on each side of the highway to track any differences between the two water bodies. In years past, only the east side of the lake was monitored. In 2006, VLAWMO began to collect samples from the west side. Both East and West Goose Lake are included in the Lambert Creek TMDL for nutrient impairment.

Groundwater used to cool equipment at the Kohler Mix Company is continuously discharging into the south end of West Goose Lake year round at a rate of 500 gallons/minute. This seems to be “flushing” the west side of the lake and could be a major reason the west side of the lake has consistently had better water quality compared to the east side over the years. The north end of West Goose discharges through a weir into Lambert Creek which flows into East Vadnais Lake, the drinking water reservoir for the SPRWS. Ground water pumping seems to have slowed from the Kohler Mix company and nutrient levels in West Goose are now similar to those in East Goose.

Approximately 16,000lbs of bullhead were removed out of both basins in 2013. The main source of nutrient issues in Goose Lake is from internal loading. Rough fish (bullhead, carp, sucker) suspend nutrients in the water column while foraging for food. We hope to see a decrease in nutrient levels over the next few years due to the rough fish removal. Spring of 2015 nets were placed in the lake again to make sure the fish harvest was successful. BioBase surveys were done on both basins in 2014 to monitor the aquatic vegetation.

The 2017 fish survey showed the rough fish removal worked and bullhead numbers are still low and seem to be in check. A 2019 fish survey should the rough fish population has increased and removal is warranted. Plans are moving forward for a number of projects in and around the Goose Lake subwatershed in the next few years to address water quality.

Goose Lake

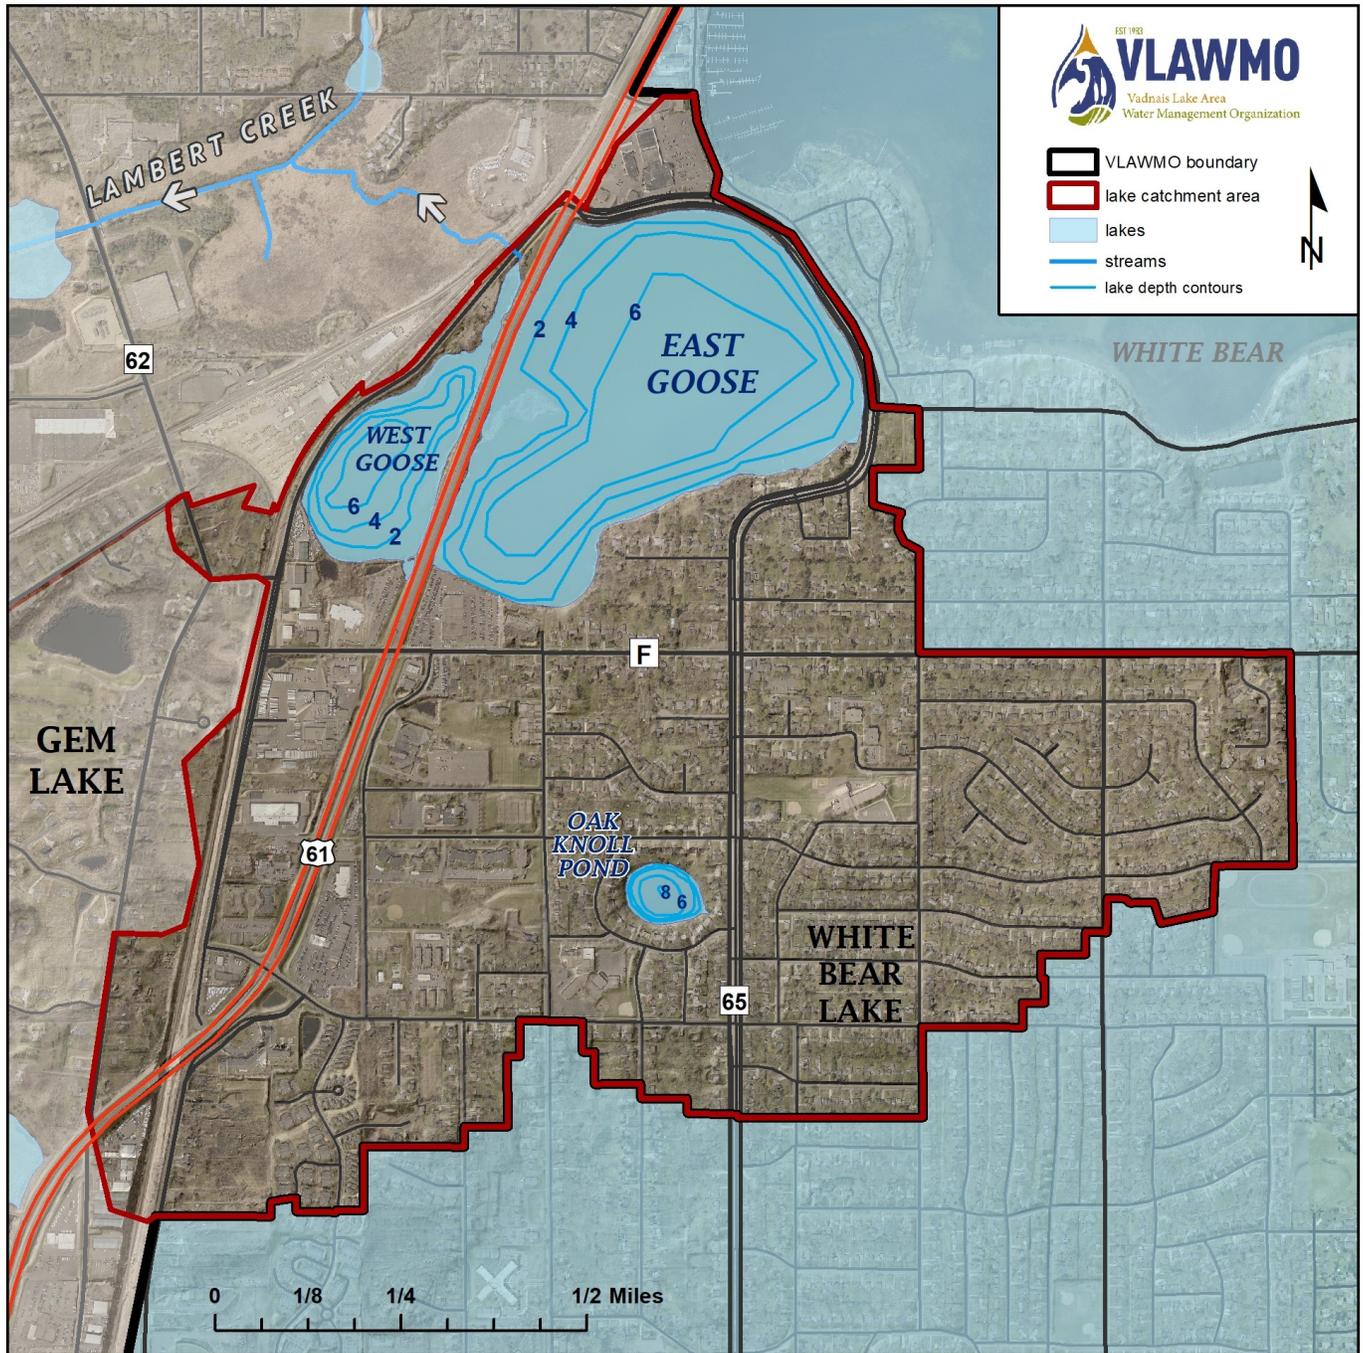

Goose Lake


East Goose Lake Historical Avg TP/Chl A/SDT

Year	TP (µg/L)	Chl A (mg/m ³)	Secchi (m)
1997	21	134	0.4
1998	17	93	0.2
1999	475	56	0.3
2000	49	154	0.3
2001	603	28	0.3
2002	613	170	0.2
2003	342	66	0.3
2004	526	0	0
2005	407	38	0
2006	392	81	0
2007	260	97	0
2008	218	86	0.3
2009	237	121	0.3
2010	207	67	0.3
2011	164	48	0.3
2012	277	96	0.2
2013	265	112	0.5
2014	207	67	0.4
2015	231	115	0.6
2016	291	84	0.5
2017	228	60	0.7
2018	172	79	0.4
2019	155	84	0.4
2020	187	167	0.3


West Goose Lake Historical Avg TP/Chl A/SDT

Year	TP (µg/L)	Chl A (mg/m ³)	Secchi (m)
2006	213	58	
2007	159	66	
2008	168	55	0.3
2009	134	40	0.5
2010	129	39	0.5
2011	126	27	0.8
2012	200	51	0.7
2013	104	32	1
2014	172	68	0.5
2015	149	97	0.5
2016	187	67	0.4
2017	167	53	0.4
2018	159	79	0.4
2019	180	109	0.3
2020	129	148	0.3

East Goose Lake Historical Avg TP/ChlA

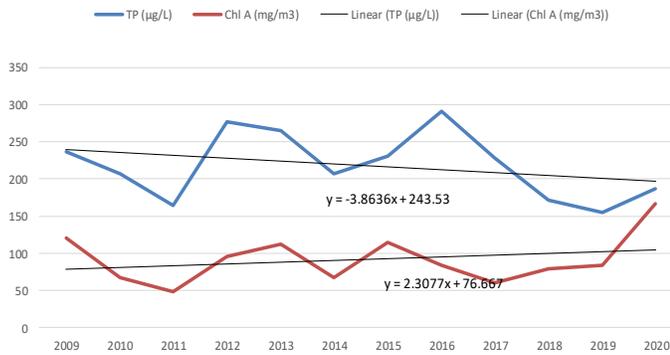

West Goose Lake Historical Avg TP/ChlA

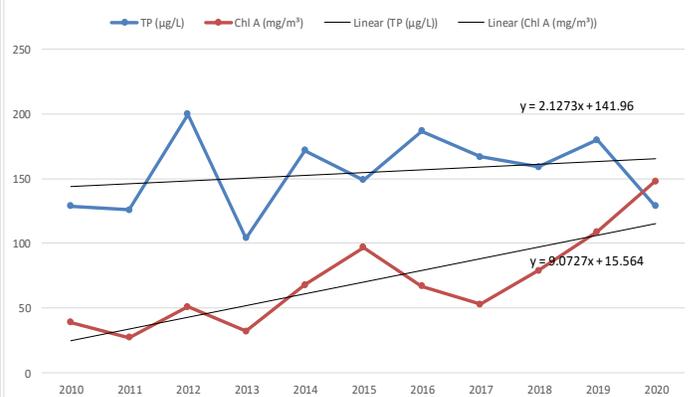

Goose Lake

SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
east goose	4/27/2020								90
east goose	5/5/2020	1.5	138	< 0.003	44.5	2.01	< 0.06	< 0.03	
east goose	5/26/2020	1.5	136	< 0.003	48.1				
east goose	6/9/2020	0.75	289	< 0.003	155	2.99	< 0.06	< 0.03	
east goose	6/23/2020		305	0.003	208				
east goose	7/7/2020	1	154	0.004	92.6	2.26	< 0.06	< 0.03	
east goose	7/21/2020	1	160	< 0.003	87.2				
east goose	8/11/2020	0.75	166	< 0.003	176	3.17	< 0.06	< 0.03	
east goose	8/25/2020	0.5	158	0.004	272				
east goose	9/8/2020	0.5	198	< 0.003	315	4.81	< 0.06	< 0.03	
east goose	9/22/2020	0.5	166	0.004	272				



- East Goose Lake YSI data is similar to that of other metro lakes.
- Nutrient levels are on a down trend in East Goose and on an up trend in West Goose

Goose Lake

SITE	DATE	Secchi (ft)	TP ($\mu\text{g/L}$)	SRP (mg/L)	ChlA ($\mu\text{g/l}$)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
west goose	4/27/2020								72
west goose	5/5/2020	1.5	98	0.014	33.8	1.28	< 0.06	< 0.03	
west goose	5/26/2020	2.5	75	< 0.003	30.7				
west goose	6/9/2020	1.5	85	< 0.003	46.7	1.52	< 0.06	< 0.03	
west goose	6/23/2020		135	< 0.003	66.8				
west goose	7/7/2020	1.25	291	0.006	53.4	3.42	< 0.06	< 0.03	
west goose	7/21/2020	0.75	191	0.008	160				
west goose	8/11/2020	1	31	< 0.003	304	2.9	< 0.06	< 0.03	
west goose	8/25/2020	0.5	163	0.003	310				
west goose	9/8/2020	0.5	140	0.005	280	4.54	< 0.06	< 0.03	
west goose	9/22/2020	1	82	0.005	195				




- West Goose Lake YSI data is similar to that of East Goose Lake
- Comparison of water quality between the two basins shows that Goose Lake West and Goose Lake East are similar, however both basins are still above PCA standards. TMDL will focus on strategies to move these two basins closer to state standards. Rough fish removal by VLAWMO along with new road construction projects and Walser Chev re-construction will hopefully help with both the external and internal nutrient loading to the lake reducing overall nutrient levels in the lake. An alum treatment is also in the works for the lake.

Goose Lake

Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
5/5/2020	b	14.74	0.391	7.06	7.11
5/5/2020	t	15.08	0.39	7.23	7.12
6/23/2020	b	22.3	0.446	8.24	8.04
6/23/2020	t	22.68	0.418	9.27	8.55
7/21/2020	b	25.19	0.353	3.96	8.39
7/21/2020	t	25.78	0.394	5.68	8.6
9/22/2020	b	16.27	0.401	5.76	8.16
9/22/2020	t	16.43	0.393	6.63	8.22


Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
5/5/2020	b	15.27	0.393	6.81	7.04
5/5/2020	t	15.35	0.392	6.87	7.03
6/23/2020	b	22.14	0.37	4.15	7.8
6/23/2020	t	22.44	0.371	5.65	7.88
7/21/2020	b	25.4	0.353	5.2	7.64
7/21/2020	t	24.86	0.365	5.62	7.65
9/22/2020	b	16.51	0.359	4.77	8.07
9/22/2020	t	17.01	0.354	6.2	8.09

	TP (µg/L)	ChlA (mg/m ³)	iron (µg/l)
East Goose	187	167	458
West Goose	129	148	532

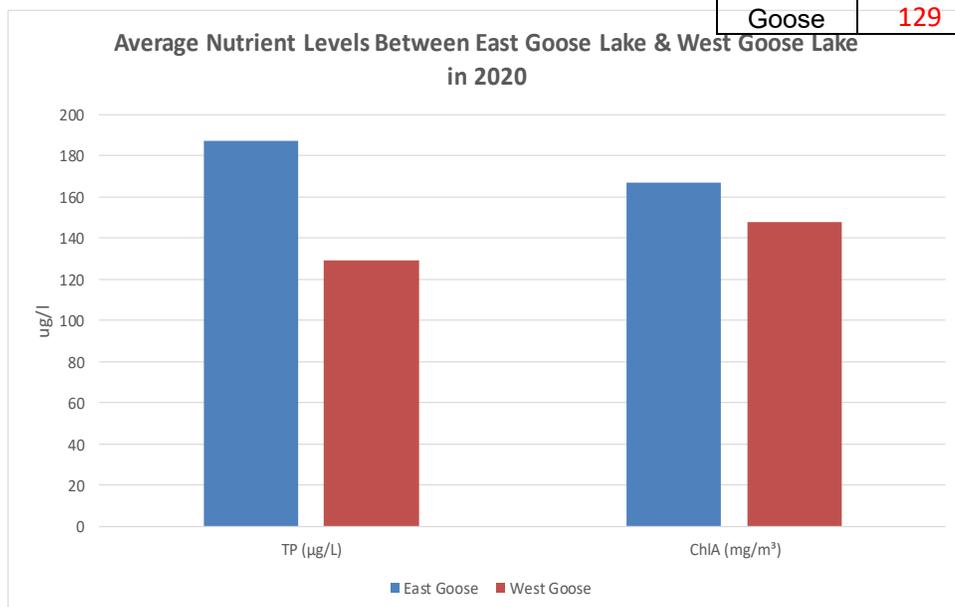

East Vadnais

East Vadnais Lake is the drinking water reservoir for the City of Saint Paul and several surrounding suburbs. It receives water from the Mississippi River via a chain of lakes (Charley, Pleasant, Sucker, Vadnais). It is managed and monitored by the Saint Paul Regional Water Services (SPRWS). Water exits the lake through an underground pipe to the water treatment plant in Roseville. From the treatment plant, water is distributed to over 446,000 residents and businesses. No recreational use is allowed on the lake except for shoreline fishing. An oxygenation/aeration system is used in the lake to help reduce TP levels. VLAWMO began sampling in 2020.

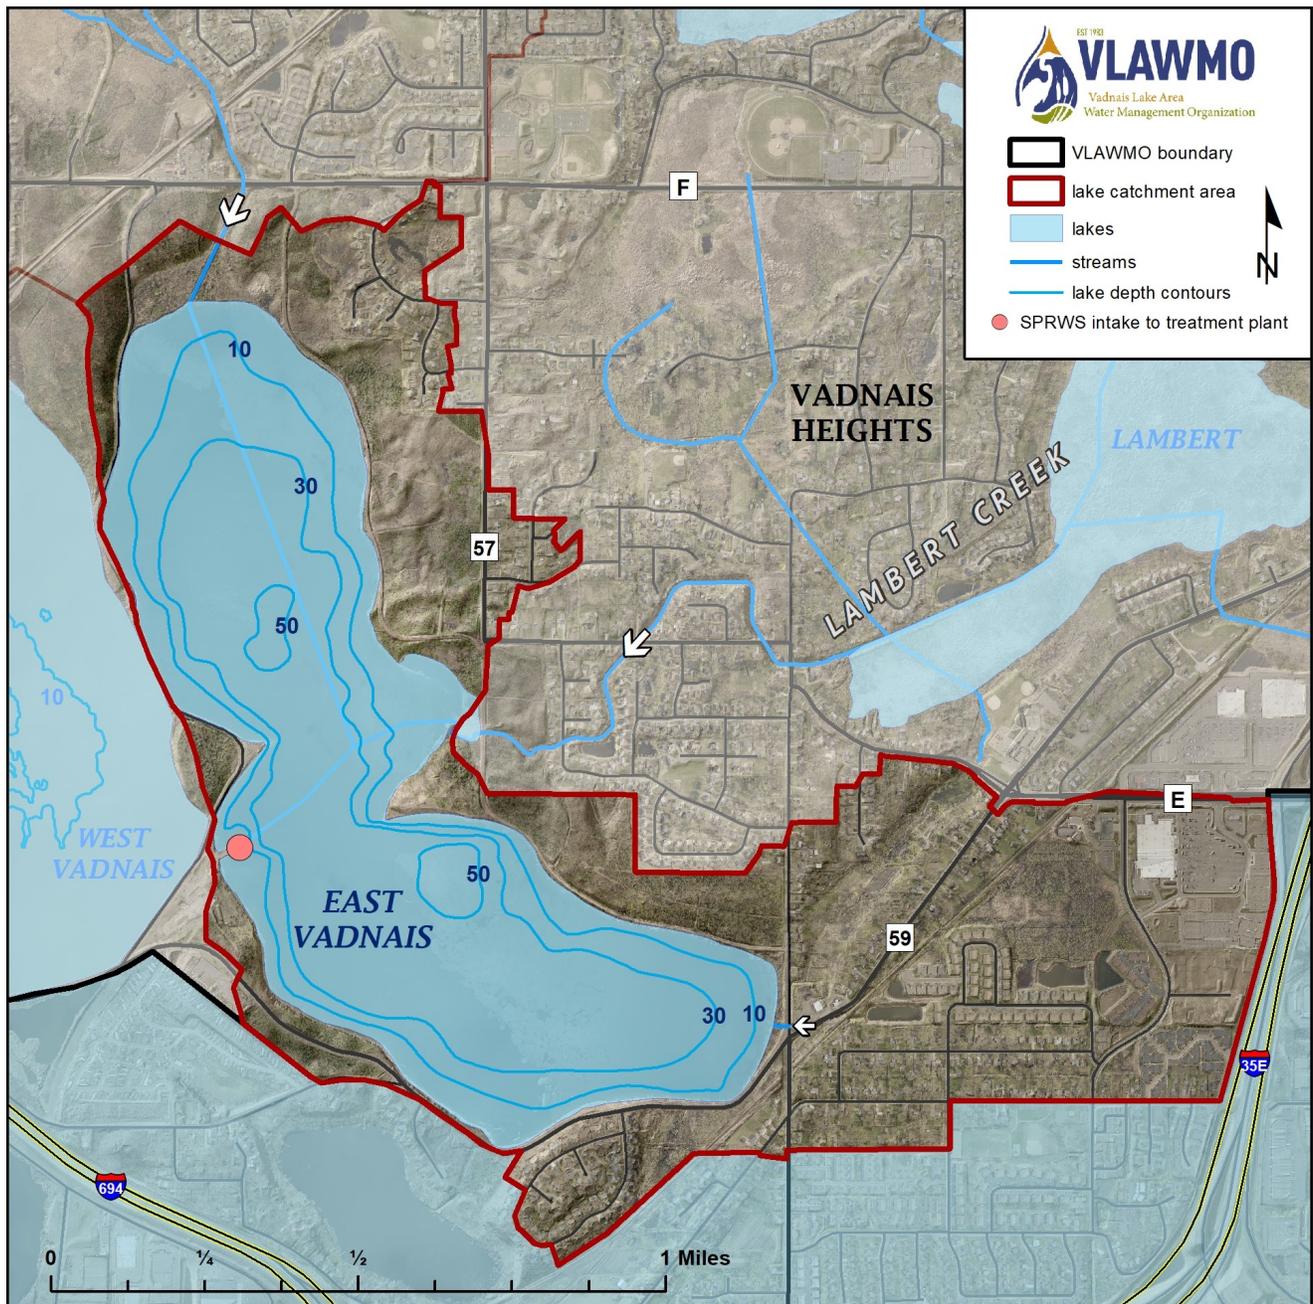


East Vadnais

East Vadnais Lake Historical Avg TP/Chl A/SDT

Year	TP (ug/L)	Chl A (mg/m3)	Secchi (m)
2020	25	3	


East Vadnais 2020 TP & ChlA

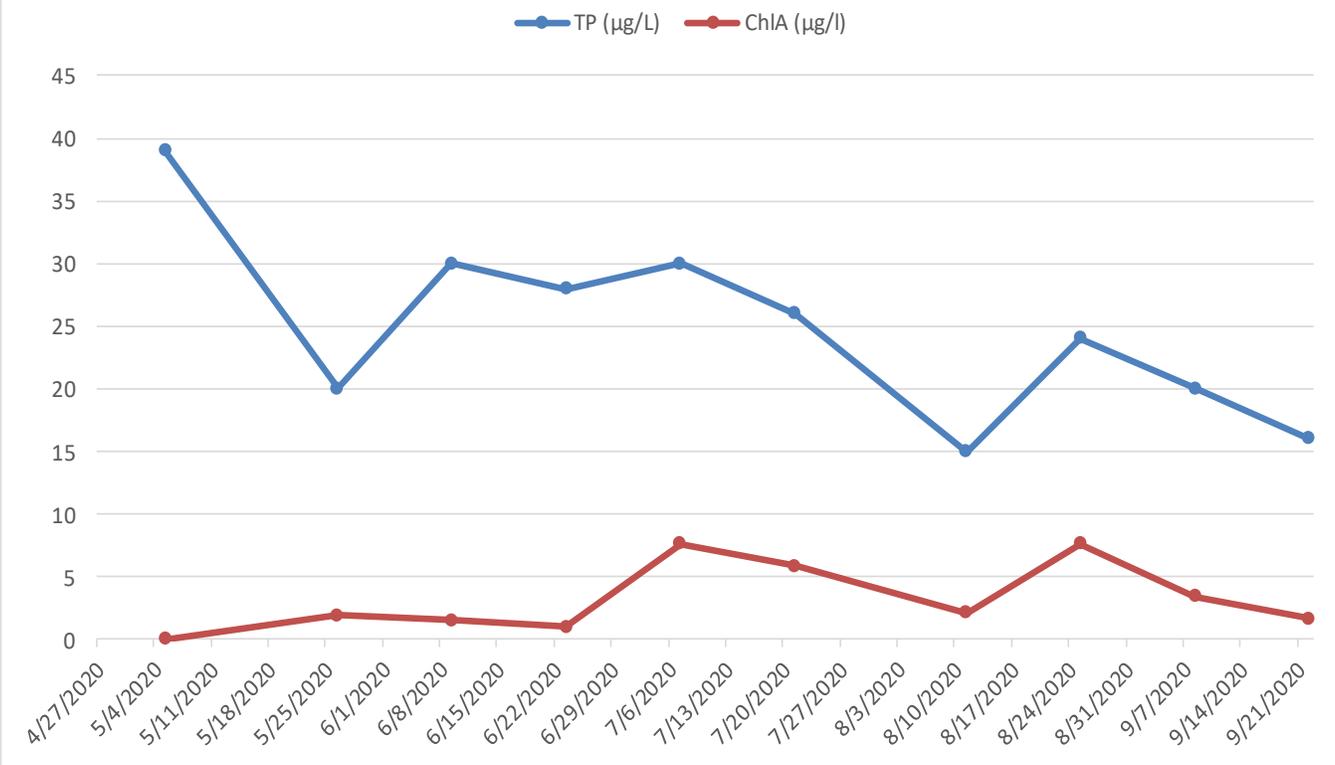

SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
East Vadnais	4/27/2020								35
East Vadnais	5/5/2020		39	0.006	< 1	0.863	< 0.06	0.162	
East Vadnais	5/26/2020		20	0.006	1.91				
East Vadnais	6/9/2020		30	0.01	1.52	0.436	< 0.06	< 0.03	
East Vadnais	6/23/2020		28	0.005	1				
East Vadnais	7/7/2020		30	0.004	7.63	0.549	< 0.06	< 0.03	
East Vadnais	7/21/2020		26	0.005	5.87				
East Vadnais	8/11/2020		15	< 0.003	2.14	0.39	< 0.06	< 0.03	
East Vadnais	8/25/2020		24	0.006	7.63				
East Vadnais	9/8/2020		20	0.006	3.46	0.644	< 0.06	0.03	
East Vadnais	9/22/2020		16	0.008	1.67				

Sucker Lake


Sucker Lake is located within the City of Vadnais Heights and is surrounded by Ramsey County park land. It is 63 acres with a maximum depth of 26 feet. According to available information, there is a diverse fish population ranging from pan fish to walleye as well as white bass that were stocked in 2010 & 2011. Sucker Lake is part of the SPRWS chain of lakes and sits between Pleasant Lake to the north and East Vadnais Lake to the south. VLAWMO began sampling the lake in 2019 for water quality.

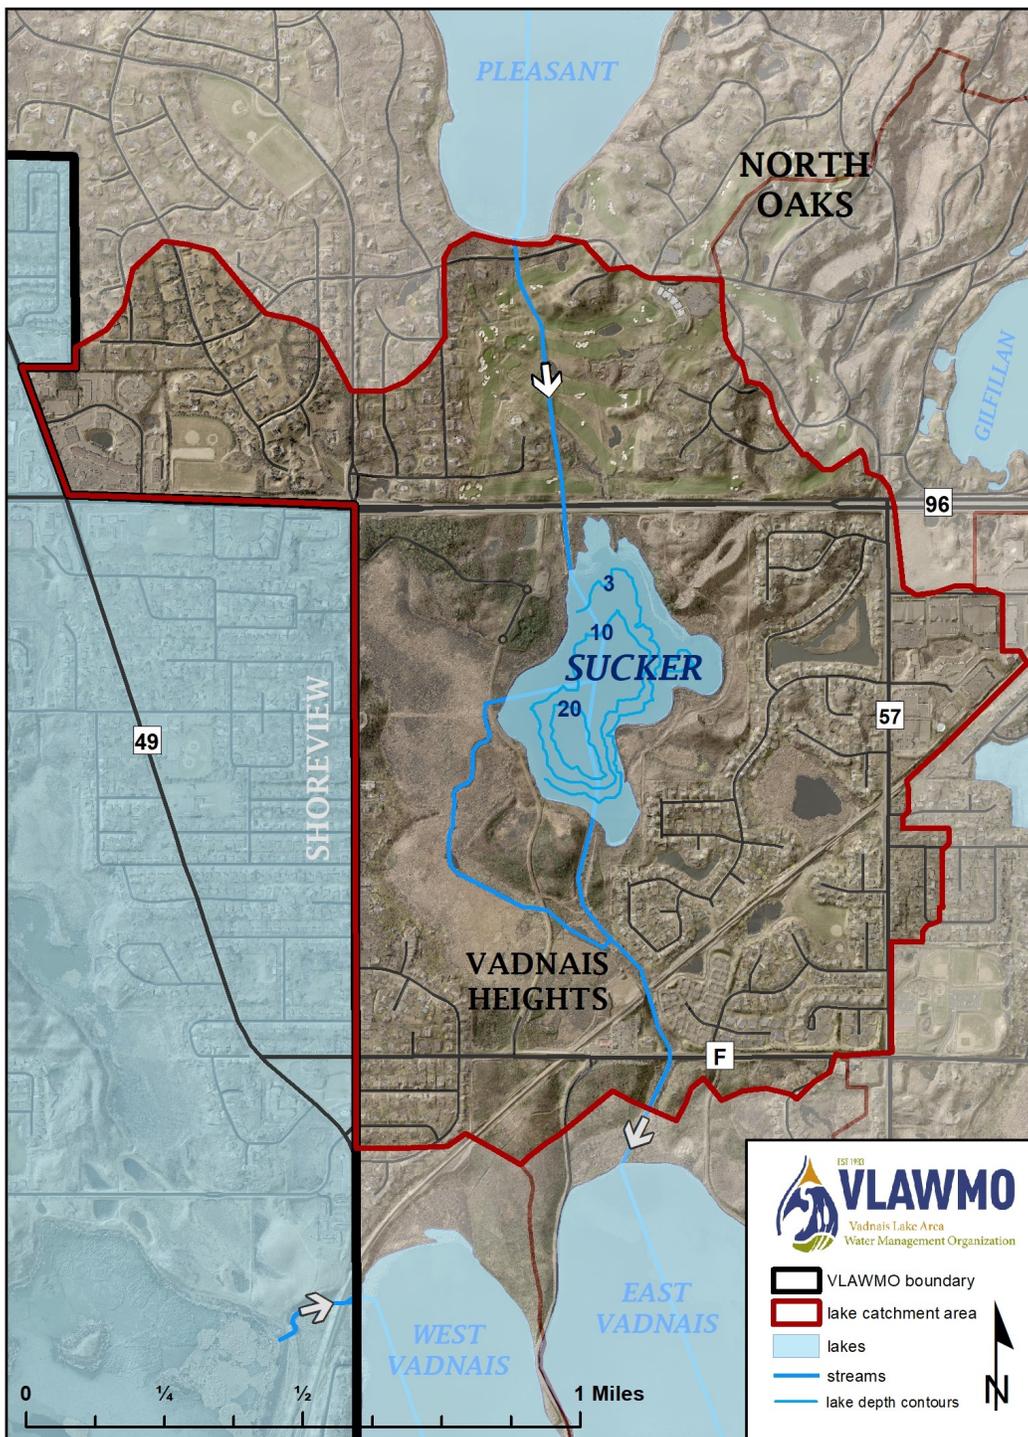

Sucker Lake

Sucker Lake Historical Avg TP/Chl A/SDT			
Year	TP (ug/L)	Chl A (mg/m ³)	Secchi (m)
2019	49	14	1.3
2020	41	8	2

Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
5/5/2020	b	14.27	0.376	8.71	7.49
5/5/2020	t	15.24	0.38	7.98	7.53
6/23/2020	b	22.4	0.372	5.09	7.87
6/23/2020	t	23.18	0.368	5.74	7.93
7/21/2020	b	25.72	0.36	3.96	8.1
7/21/2020	t	25.76	0.36	4.06	8.11
9/22/2020	b	17.5	0.346	6.66	7.95
9/22/2020	t	19.38	0.346	6.54	7.96

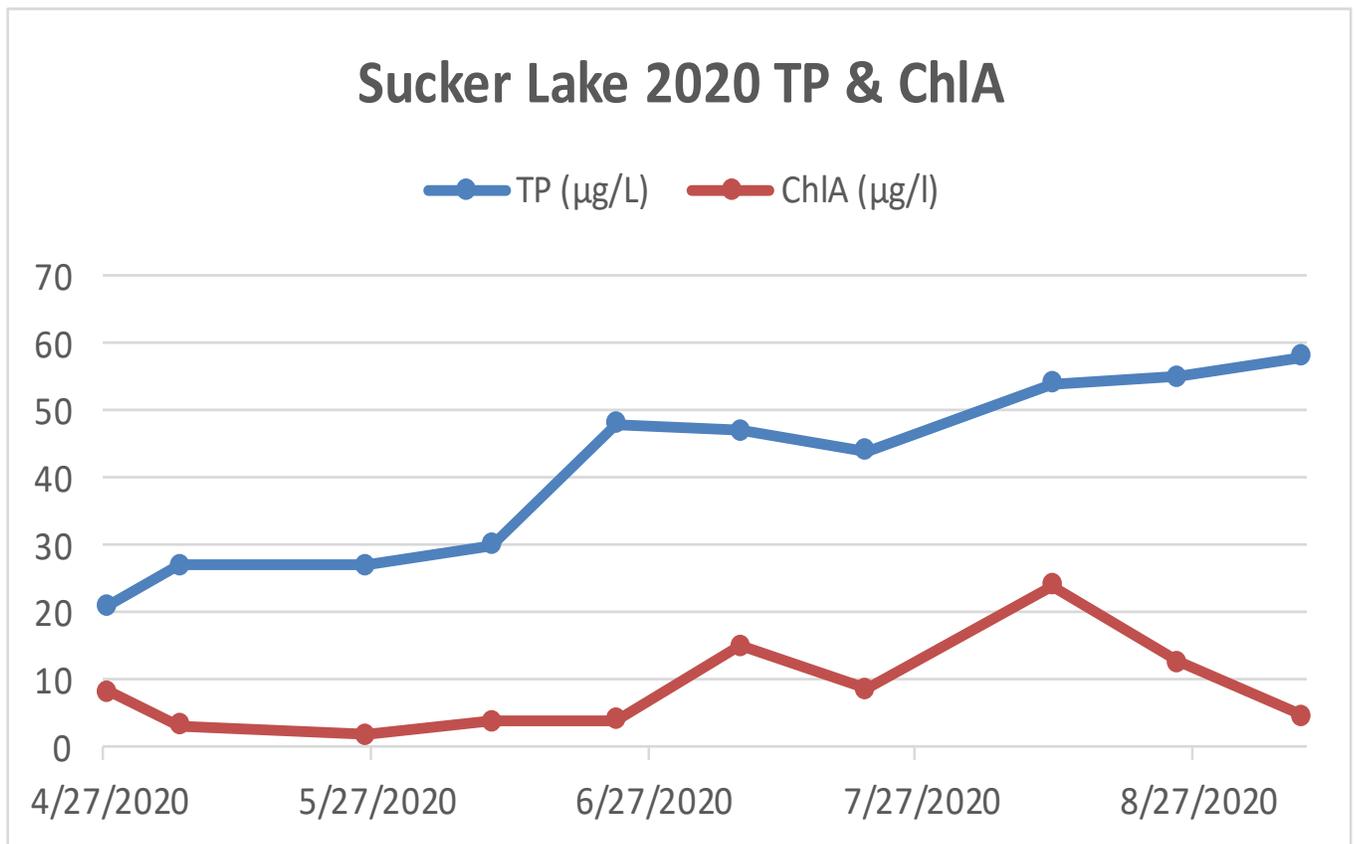

- Second season of water quality sampling shows no issues in Sucker Lake


Sucker Lake

SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
sucker	4/27/2020								17
sucker	5/5/2020	4	21	0.004	8.01	0.731	< 0.06	< 0.03	
sucker	5/26/2020	9	27	0.004	2.97				
sucker	6/9/2020	7	27	0.004	1.67	0.492	< 0.06	< 0.03	
sucker	6/23/2020		30	< 0.003	3.67				
sucker	7/7/2020	6	48	0.012	3.81	0.575	0.085	< 0.03	
sucker	7/21/2020	6	47	0.017	14.9				
sucker	8/11/2020	5.5	44	< 0.003	8.54	0.78	0.07	0.033	
sucker	8/25/2020		54	0.007	24				
sucker	9/8/2020	4.5	55	0.016	12.5	0.822	0.087	0.043	
sucker	9/22/2020	6.5	58	0.015	4.45				

- Parameters look good for a metro lake

Pleasant Lake


Pleasant Lake is managed by the Saint Paul Regional Water Services (SPRWS) in partnership with VLAWMO and the North Oaks Home Owners' Association (NOHOA). It is part of the chain of lakes that moves water from the Mississippi (Fridley) to East Vadnais Lake. It is impaired for mercury in fish tissue. SPRWS collects water quality information for Pleasant Lake. No motorized recreational use is allowed on the lake. An oxygenation system was installed in 2013 to address high Phosphorus levels. VLAWMO began sampling in 2020.

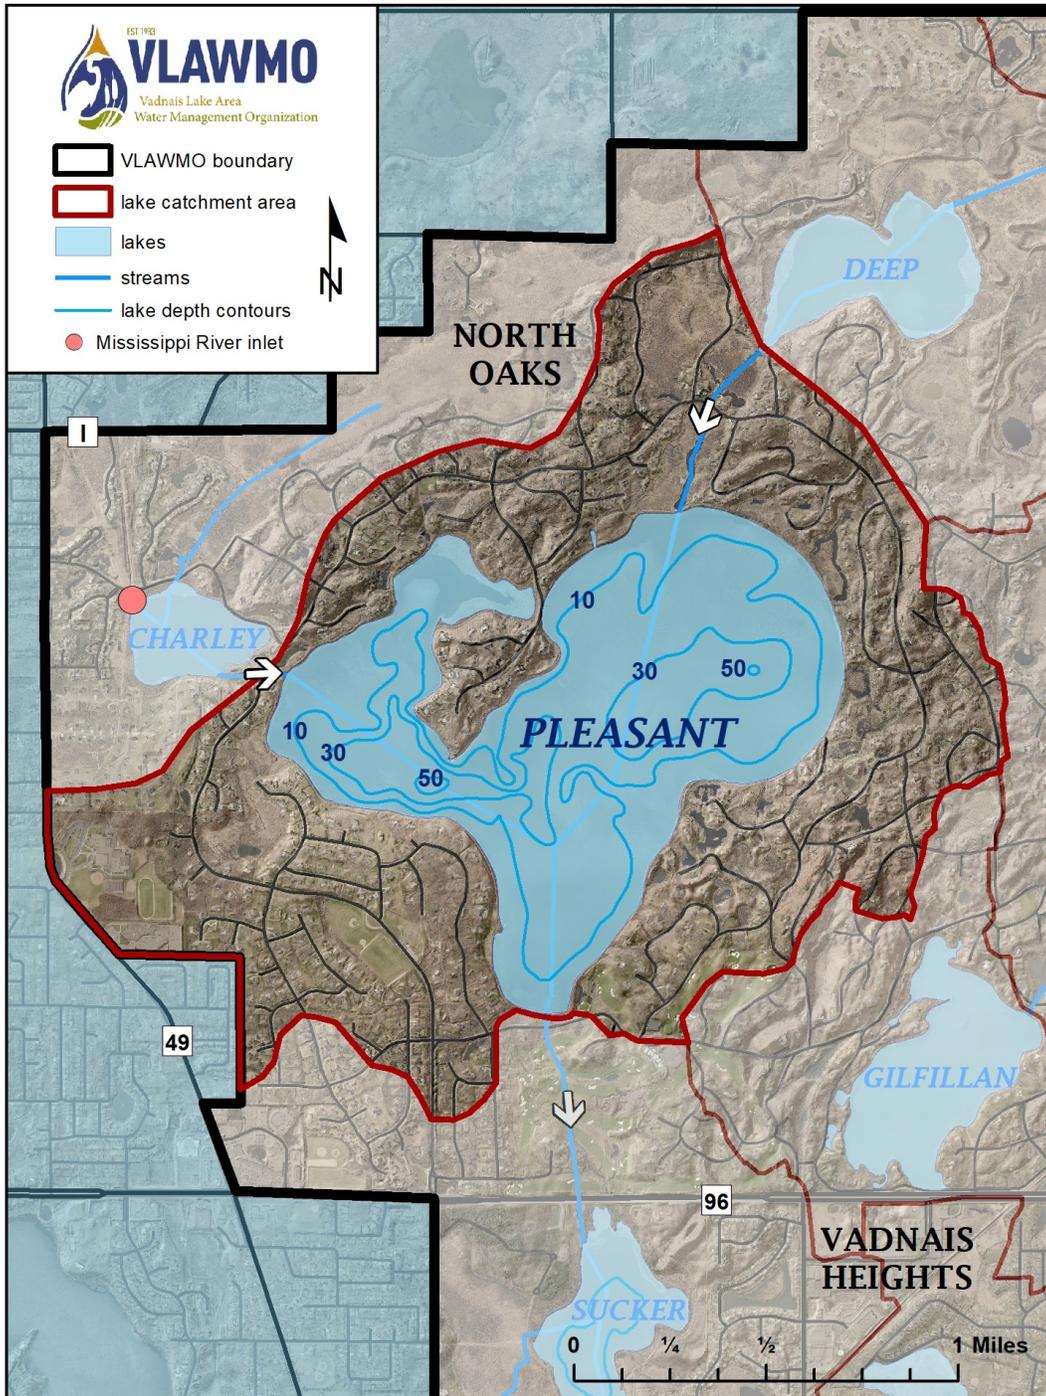

Pleasant Lake

Pleasant Lake Historical Avg TP/Chl A/SDT			
Year	TP (ug/L)	Chl A (mg/m3)	Secchi (m)
2020	41	16	1.7


Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
5/5/2020	b	13.7	0.365	9.01	7.46
5/5/2020	t	13.94	0.365	8.59	7.48
6/23/2020	b	22.58	0.388	5.12	7.79
6/23/2020	m	23.17	0.401	4.98	7.82
6/23/2020	t	23.29	0.401	5.04	7.84
7/21/2020	b	26.14	0.371	5.15	8.07
7/21/2020	t	26.64	0.365	6.1	8.17
9/22/2020	b	17.96	0.362	7.49	7.95
9/22/2020	t	19.59	0.355	7.97	7.96

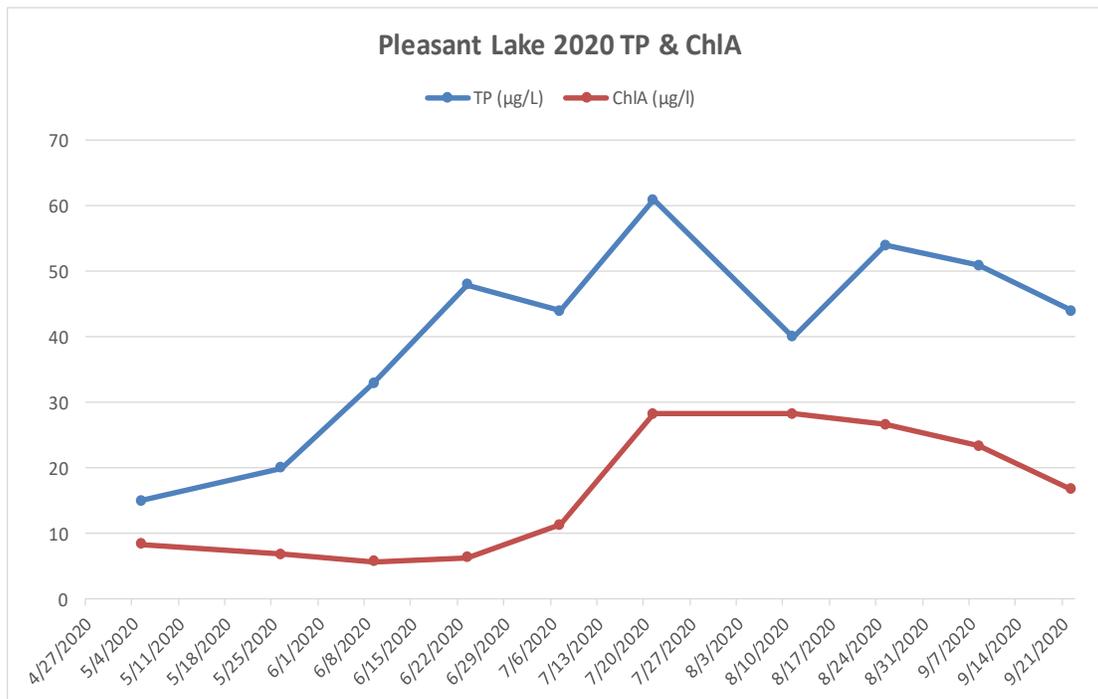

SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
Pleasant	4/27/2020								25
Pleasant	5/5/2020	4	15	0.004	8.39	0.592	< 0.06	< 0.03	
Pleasant	5/26/2020	10	20	0.004	6.82				
Pleasant	6/9/2020	6	33	0.003	5.72	0.551	< 0.06	0.059	
Pleasant	6/23/2020		48	0.013	6.34				
Pleasant	7/7/2020	5	44	0.005	11.4	0.524	< 0.06	0.07	
Pleasant	7/21/2020	5	61	0.006	28.3				
Pleasant	8/11/2020	5.5	40	< 0.003	28.3	0.78	< 0.06	< 0.03	
Pleasant	8/25/2020	4	54	0.007	26.7				
Pleasant	9/8/2020	4	51	0.008	23.4	0.828	0.064	0.07	
Pleasant	9/22/2020	5.5	44	0.008	16.8				


Tamarack Lake

Tamarack Lake is part of the Tamarack Nature Center. It is 86 acres with a maximum depth of 10 feet. As there is no boat access, samples are taken from the observation dock on the southeast side of the lake. Ramsey County restored a large ditched wetland downstream of Tamarack and upstream of Fish Lake, as part of a wetland-banking project in 1997. Tamarack Lake is one of 4 lakes listed as impaired for nutrients on the 2010 Lambert Creek TMDL study. Internal loading is the major reason for the impairment. This is a very isolated lake with a large natural buffer, runoff from Hwy 35E will make its way to Tamarack on the west side after going through a large wetland. Historically Tamarack was surrounded by farmland. TP & ChIA levels are extremely high and show little sign of lowering. In the summer of 2013 VLAWMO installed a floating island on the lake. The island was planted with native vegetation. The root systems that develop below the island create a large surface area for highly beneficial microbes allowing for increased nutrient uptake and reduction in overall nutrient levels in the lake. The floating island has shown to provide no benefit to water quality and was naturally removed in 2019.

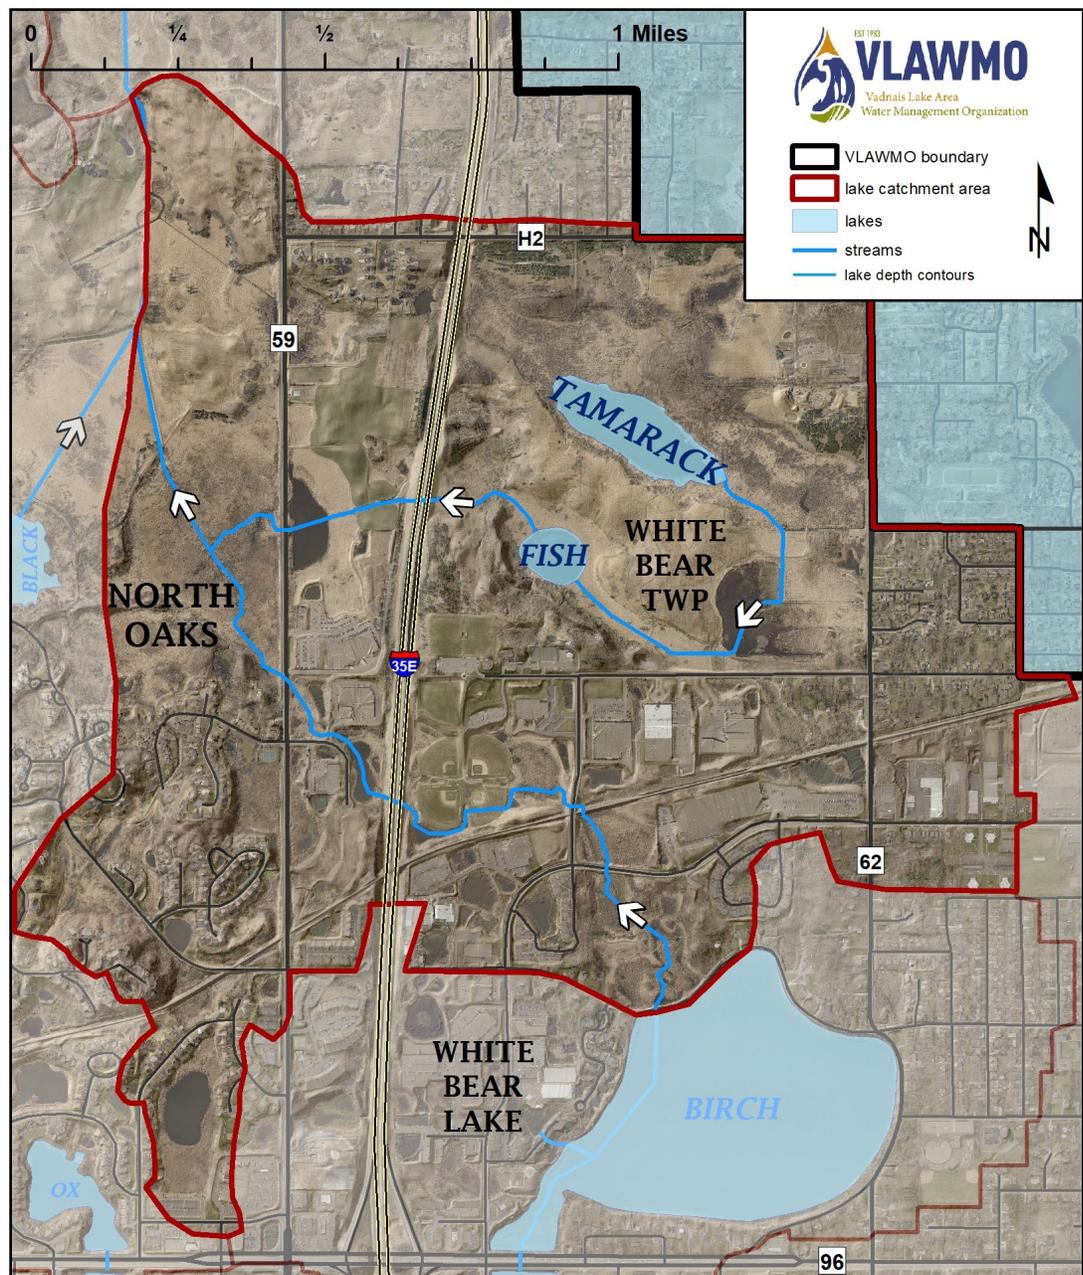


Tamarack Lake

Tamarack Lake Historical Avg TP/ChlA/SDT				Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
Year	TP (µg/L)	Chl A (mg/m ³)	Secchi (m)	5/5/2020	b	15.55	0.44	6.12	7.28
1997	17	180	0.2	5/5/2020	t	15.52	0.437	7.77	7.3
1998	54	32	0.5	6/23/2020	b	22.95	0.455	6.31	8.13
1999	90	26	0.4	6/23/2020	t	22.99	0.454	5.05	8.14
2000	60	27	0.4	7/21/2020	b	24.96	0.404	5.21	7.91
2001	132	37	0.4	7/21/2020	t	25.15	0.403	5.36	7.89
2002	164	120	0.4	9/22/2020	b	16.52	0.389	7.63	8.28
2003	168	95	0.3	9/22/2020	t	17.88	0.389	7.55	8.28
2004	96	0	0.8						
2005	143	65	0						
2006	136	38	0						
2007	148	109	0.5						
2008	115	99	0.3						
2009	161	161	0.2						
2010	157	96	0.2						
2011	120	28	0.6						
2012	129	64	0.4						
2013	119	50	0.5						
2014	141	72	0.5						
2015	183	119	0.4						
2016	187	87	0.4						
2017	172	68	0.4						
2018	154	103	0.4						
2019	140	104	0.4						
2020	146	122	0.3						

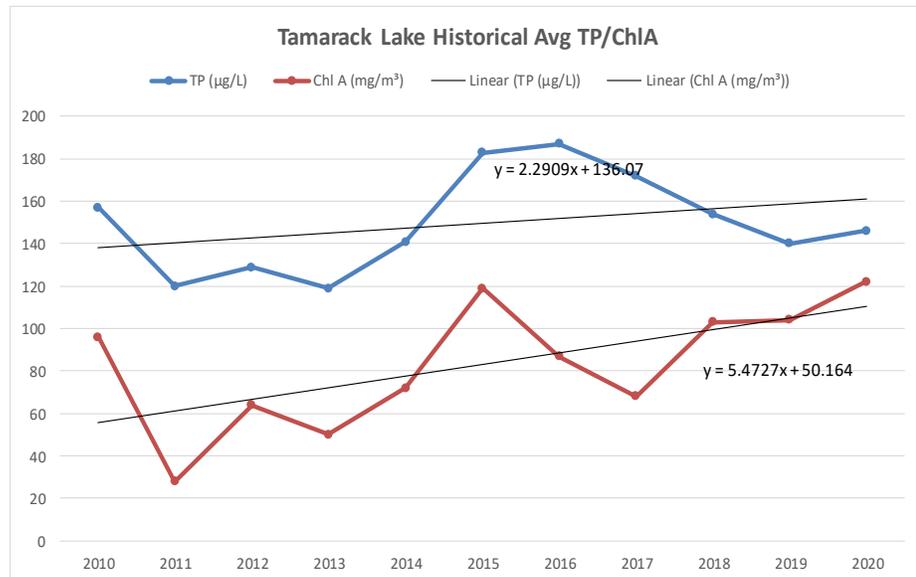

Tamarack Lake


SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
tamarack	4/27/2020								51
tamarack	5/5/2020	1.5	58	0.004	27.4	1.07	< 0.06	< 0.03	
tamarack	5/26/2020	1.5	72	0.004	34.7				
tamarack	6/9/2020	1	109	0.003	80.1	1.66	< 0.06	< 0.03	
tamarack	6/23/2020		123	0.003	67.6				
tamarack	7/7/2020	1	138	0.004	85.4	1.84	< 0.06	< 0.03	
tamarack	7/21/2020	1.5	161	0.007	139				
tamarack	8/11/2020	0.75	209	0.004	198	3.19	< 0.06	< 0.03	
tamarack	8/25/2020	1	192	0.009	182				
tamarack	9/8/2020	0.5	220	0.01	235	3.96	< 0.06	< 0.03	
tamarack	9/22/2020	1	184	0.012	174				

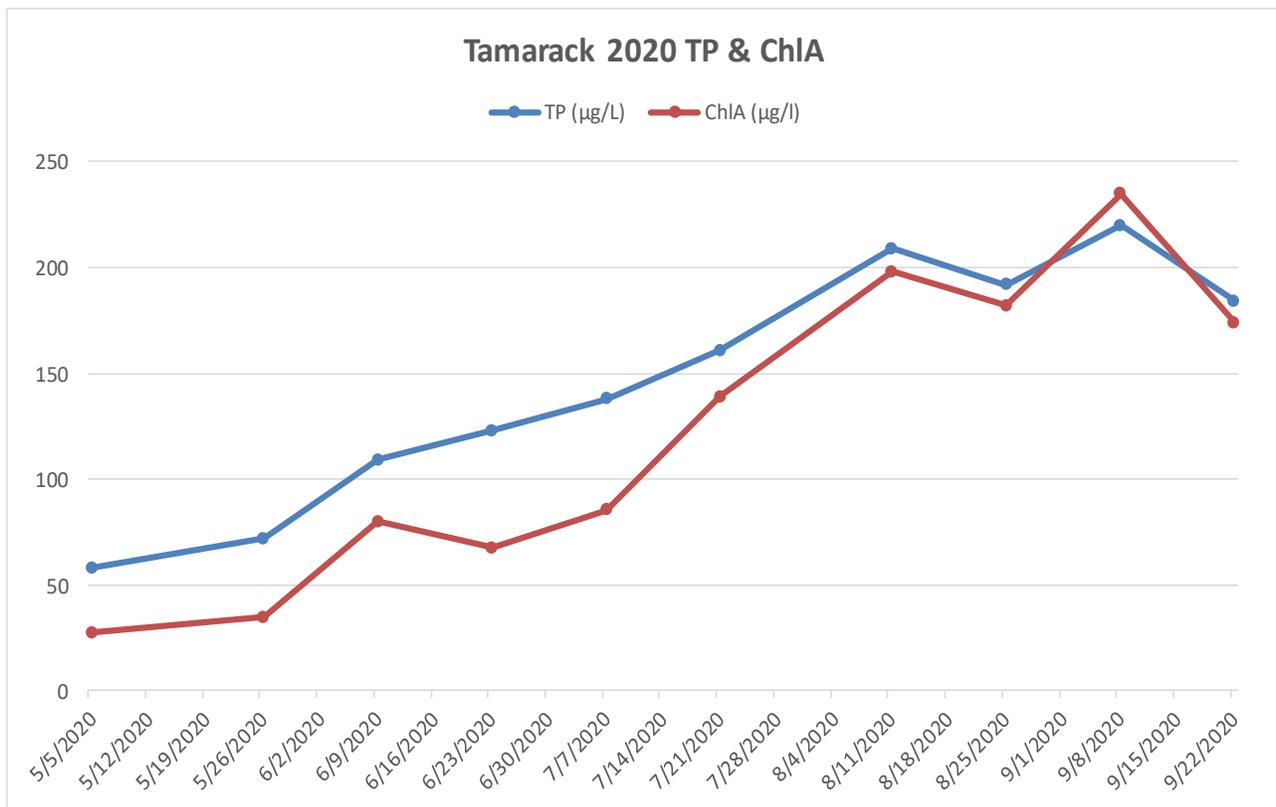

- Tamarack Lake YSI data is similar to that of similar metro lakes, nutrient levels are very high especially for an isolated lake with significant buffers. Internal loading is most likely the cause of these high levels
- Nitrogen and ammonia levels are below state standards for Tamarack Lake and similar to the rest of the VLAWMO lakes


West Vadnais

West Vadnais Lake is located in the southwest corner of the watershed. Its neighbor, East Vadnais Lake, receives in lake treatment by the Saint Paul Water Authority (SPRWS) as a measure to protect the drinking water supply. Even though these lakes are right next to each other they are not connected and have drastically different water quality. The SPRWS monitors East Vadnais Lake. VLAWMO monitored West Vadnais for part of 2009 and began full monitoring in 2013. West Vadnais is on the 2014 impaired waters list for nutrients.

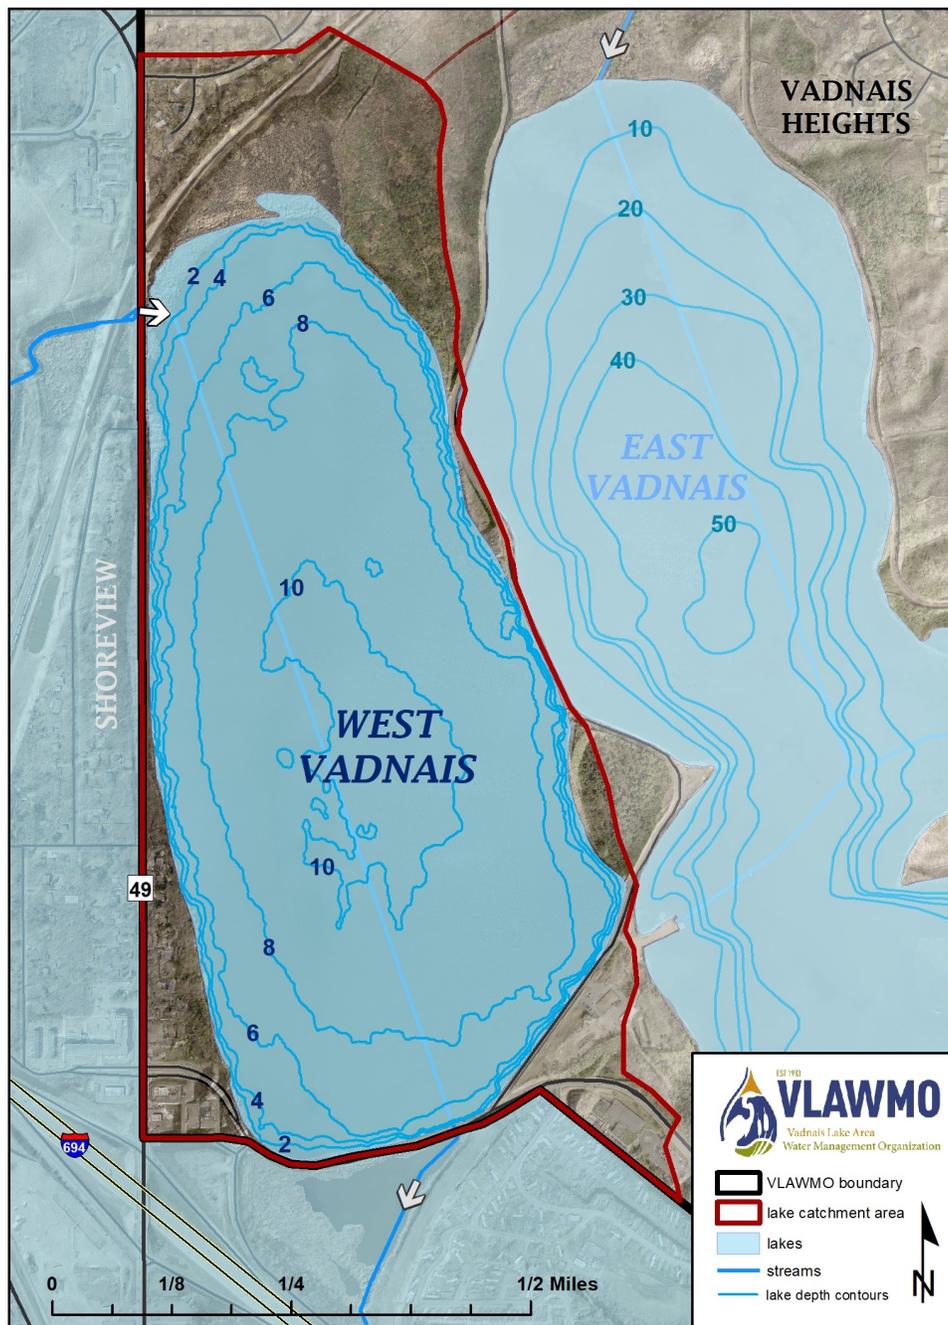

West Vadnais


West Vadnais Historical Avg TP/Chl A/SDT				Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
Year	TP (µg/L)	Chl A (mg/m³)	Secchi (m)						
				5/5/2020	b	14.69	0.441	4.92	6.82
2009	185	103	0.4	5/5/2020	t	15.29	0.428	6.86	7.2
2013	79	59	0.4	6/23/2020	b	22.25	0.417	4.67	7.69
2014	70	56	0.5	6/23/2020	t	22.32	0.409	4.73	7.72
2015	88	108	0.3	7/21/2020	b	25.58	0.374	4.77	8.01
2016	110	71	0.3	7/21/2020	t	25.67	0.373	5.05	8.08
2017	130	54	0.4	9/22/2020	b	16.64	0.443	6.21	8.1
2018	102	94	0.4	9/22/2020	t	16.71	0.441	6.41	8.1
2019	79	64	0.5						
2020	127	80	0.5						

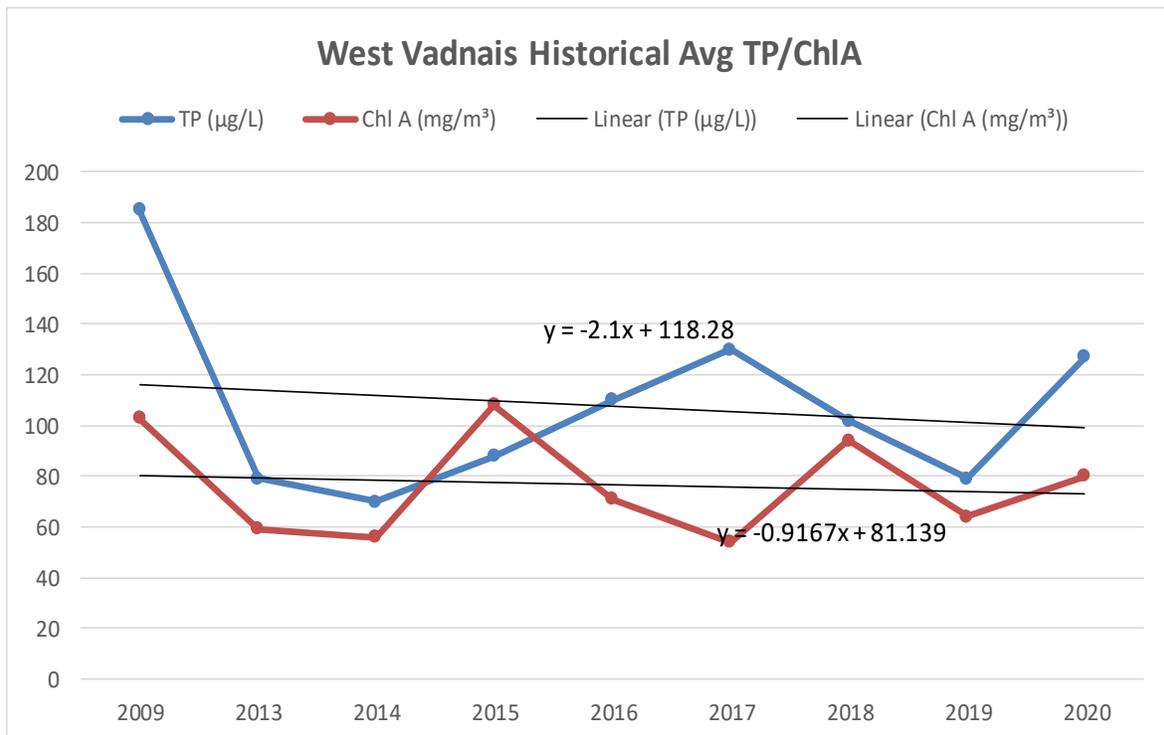

- West Vadnais Lake YSI data is similar to that of similar metro lakes, DO's are slightly lower on average than the rest of VLAWMO lakes, Conductivity is on the high side for VLAWMO lakes
- Water levels and carp have been an issue for West Vadnais and projects are in the works to address these issues

West Vadnais

SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
west vadnais	4/27/2020								66
west vadnais	5/5/2020	3	44	< 0.003	12.5	1.12	< 0.06	< 0.03	
west vadnais	5/26/2020	4.5	41	< 0.003	5.34				
west vadnais	6/9/2020	2	65	< 0.003	42.7	1.02	< 0.06	< 0.15	
west vadnais	6/23/2020		125	< 0.003	62.7				
west vadnais	7/7/2020	1.5	95	< 0.003	78.3	2.25	0.123	< 0.03	
west vadnais	7/21/2020	1	150	< 0.003	140				
west vadnais	8/11/2020	0.75	188	< 0.003	195	3.77	< 0.06	< 0.03	
west vadnais	8/25/2020	1.25	163	0.004	65.4				
west vadnais	9/8/2020	1	216	0.003	49.4	4.24	0.121	< 0.03	
west vadnais	9/22/2020	1	185	0.003	147				

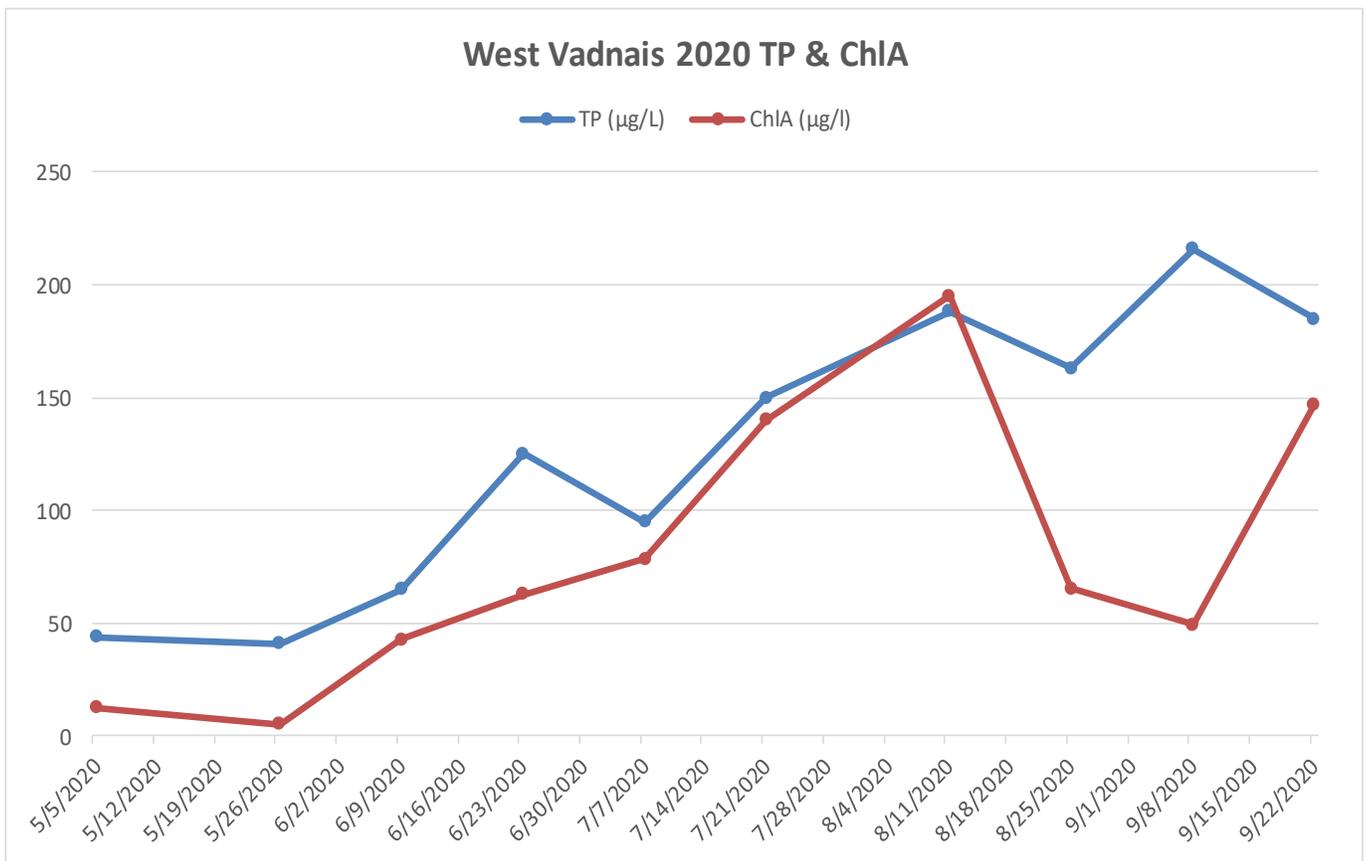


- Nitrogen and ammonia levels are below state standards for West Vadnais Lake and similar to the rest of the VLAWMO lakes.

Wilkinson Lake


Wilkinson Lake was part of the James J. Hill experimental farm and is now part of the Minnesota Land Trust, which preserves the land in a natural condition. The City of North Oaks required 150-foot buffer between the lake edge and any structures. The property on the northwest side of the lake is currently being developed. The North Oaks Company has spent considerable time and effort over the years to restore the lake including the installation of a fish barrier to attempt to keep the rough fish from destroying the natural vegetation and waterfowl habitat and to improve water quality. The lake has also had two drawdowns to kill the carp. Wilkinson is the fourth lake within VLAWMO to be on

the 2010 impaired waters list for nutrients and is part of the ongoing Lambert Creek TMDL study. Farmland runoff and internal loading seem to be the main factors to the poor water quality. Nutrient levels have shown a down trend since spiking in 2015.

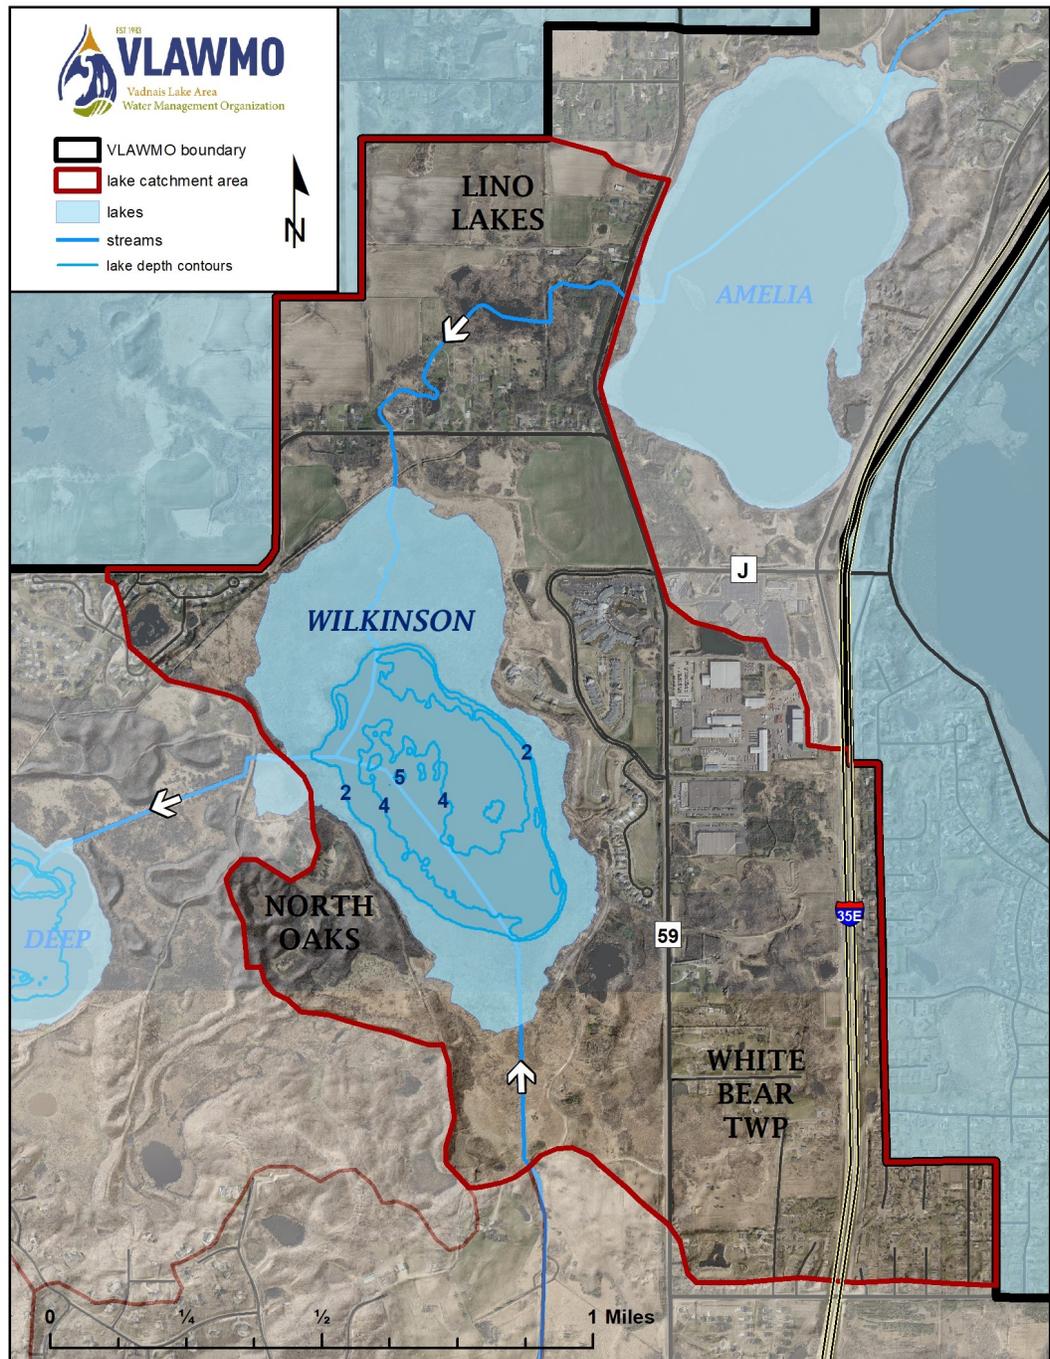

Wilkinson Lake

Wilkinson Lake Historical Avg TP/Chl A/SDT				Date	Reading Depth (Bottom/Top)	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
Year	TP (µg/L)	Chl A (mg/m ³)	Secchi (m)	5/5/2020	b	14.52	0.463	6.21	7.35
1998	48	26	1.1	5/5/2020	t	14.56	0.464	6.85	7.28
1999	62	8	0	6/23/2020	b	21.36	0.405	2.88	8
2000	38	34	0	6/23/2020	t	21.47	0.404	1.93	7.98
2001	299	99	0.2	7/21/2020	b	24.51	0.413	2.21	8.09
2002	107	40	0	7/21/2020	t	24.87	0.409	2.2	8.08
2003	130	18	0	9/22/2020	b	16.31	0.464	6.86	8.28
2004	72	0	0	9/22/2020	t	16.32	0.463	6.25	8.23
2005	183	52	0						
2006	96	10	0						
2007	104	18	0.9						
2008	64	8	0.3						
2009	125	17	1						
2010	140	31	0.8						
2011	80	14	1						
2012	103	42	0.9						
2013	159	27	0.9						
2014	100	21	0.9						
2015	209	147	0.5						
2016	169	24	1.1						
2017	105	9	1.2						
2018	97	8	1.2						
2019	81	8	1.1						
2020	92	18	1.1						

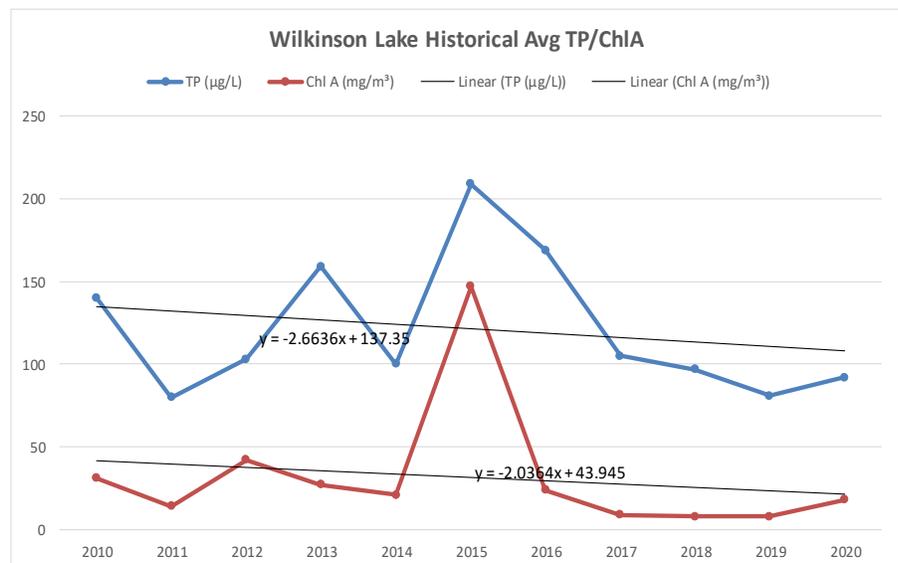

Wilkinson Lake


SITE	DATE	Secchi (ft)	TP (µg/L)	SRP (mg/L)	ChlA (µg/l)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
wilkinson	4/27/2020								57
wilkinson	5/5/2020	4	35	< 0.003	6.23	0.935	< 0.06	< 0.03	
wilkinson	5/26/2020	3	52	< 0.003	8.54				
wilkinson	6/9/2020	2.5	94	0.005	40.7	1.28	< 0.06	< 0.03	
wilkinson	6/23/2020		104	0.009	27.8				
wilkinson	7/7/2020	3.5	136	0.022	9.08	2.14	0.314	< 0.03	
wilkinson	7/21/2020	4	141	0.028	17.6				
wilkinson	8/11/2020	3.5	82	0.003	15.1	1.39	< 0.06	< 0.03	
wilkinson	8/25/2020	3.5	90	0.013	9.08				
wilkinson	9/8/2020	3.5	107	0.019	18.9	1.78	0.116	< 0.03	
wilkinson	9/22/2020	4.5	85	0.005	27.8				



- Nitrogen and ammonia levels are below state standards for Wilkinson Lake and similar to the rest of the VLAWMO lakes.
- Wilkinson Lake YSI data is similar to that of similar metro lakes, DO's are slightly lower on average than the rest of VLAWMO lakes, Conductivity is on the high side for VLAWMO lakes.

Lake Comparison Chloride

	2010 Cl mg/L	2011 Cl mg/L	2012 Cl mg/L	2013 Cl mg/L	2014 Cl mg/L	2015 Cl mg/L	2016 CL mg/L	2017 CL mg/L	2018 CL mg/L	2019 CL mg/L	2020 CL mg/L
Charley	16	20	22	30	25	20	15	19	35	17	10
West Goose	30	44	29	53	44	20	29	27	50	80	72
Tamarack	34	34	32	35	35	36	30	38	40	60	51
Gem	35	40	44	45	40	42	38	33	34	35	41
Deep	42	45	35	44	43	35	45	41	41	44	50
Gilfillan	42	41	40	26	25	30	30	26	31	35	36
Amelia	60	75	71	68	66	66	60	55	60	65	64
Wilkinson	60	54	57	66	60	60	55	51	48	55	57
Black	9	10	8	5	5	9	10	20	20	20	25
East Goose	90	95	76	83	77	76	61	66	90	119	90
Birch	95	100	89	89	80	89	78	83	95	110	100
Sucker										30	17
Pleasant											25
East Vadnais											35
West Vadnais				90	82	85	80	66	65	60	66

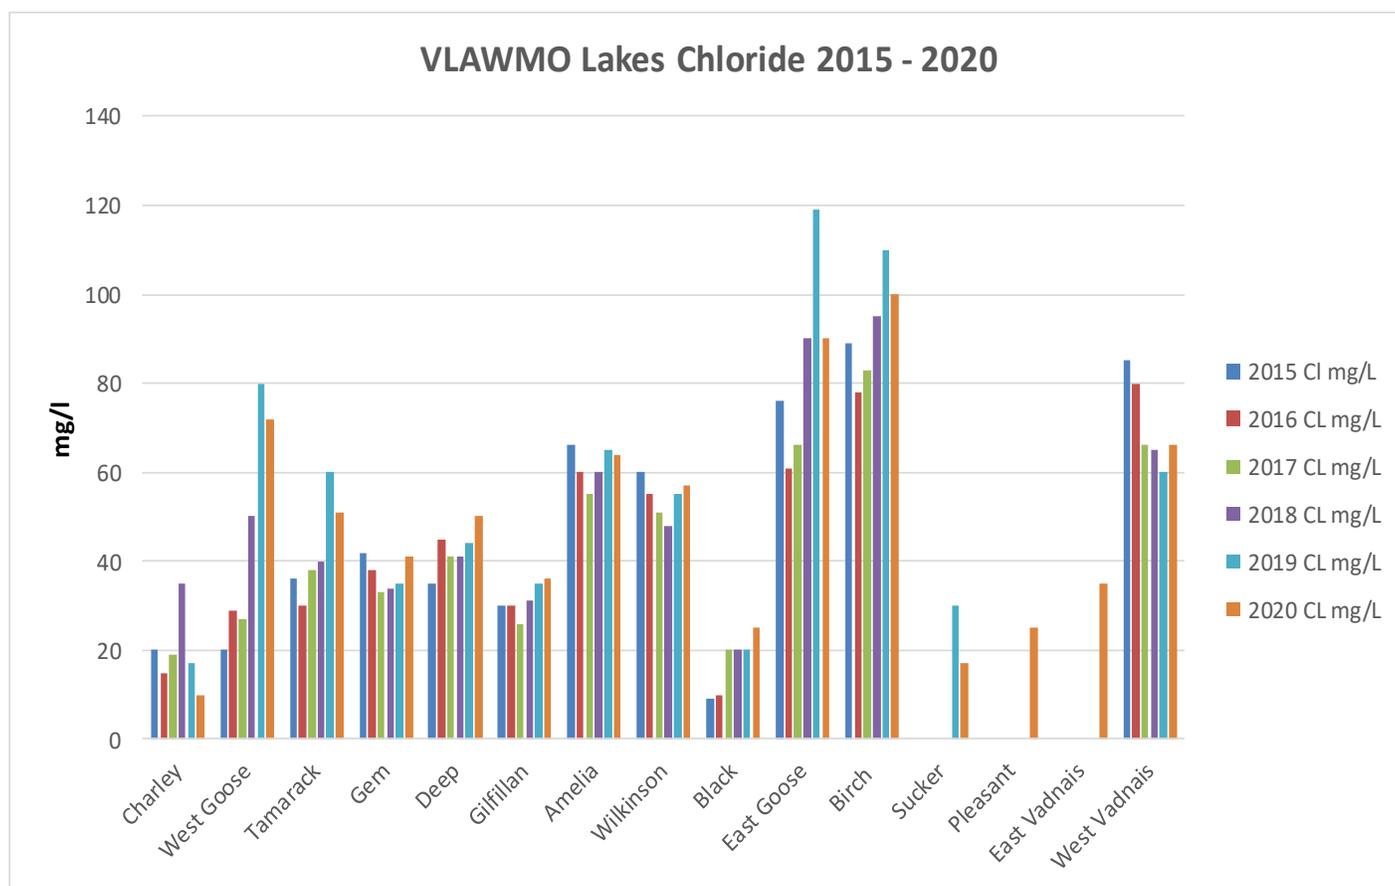

Lake Comparison Chloride

- **Chloride Standards**

Chronic Exposure Standard—4 day average > 230 mg/l

Acute Exposure Standard—1 hour > 860 mg/l


Impairment Threshold—Two or more exceedances in a three year period having at least five data points

- VLAWMO staff takes Lake Chloride readings in the spring right after ice-off. The samples are taken from the middle of the lake. 2020 was the 11th year of VLAWMO's chloride program. The lakes with the highest chloride levels are typically the lakes that receive the most street/storm water runoff. Most of our cities have gone to an all salt mix for winter ice control and future monitoring will be interesting to see how that will affect the chloride levels in VLAWMO lakes.

Lake Comparison Total Phosphorus (TP)

	2010 TP µg/L	2011 TP µg/L	2012 TP µg/L	2013 TP µg/L	2014 TP µg/L	2015 TP µg/L	2016 TP µg/L	2017 TP µg/L	2018 TP µg/L	2019 TP µg/L	2020 TP µg/L
Charley	90	87	74	57	59	57	78	54	78	60	52
West Goose	129	126	200	104	172	149	110	167	159	180	129
Tamarack	157	120	129	119	141	183	187	172	154	140	146
Gem	53	32	41	35	31	38	30	32	36	33	35
Deep	55	95	87	121	136	89	76	84	97	68	72
Gilfillan	192	123	70	38	38	55	46	58	60	56	54
Amelia	32	38	39	39	48	28	51	34	30	36	29
Wilkinson	140	80	103	159	100	209	169	105	97	81	92
Black	34	44	31	32	21	18	17	18	34	24	25
East Goose	207	164	277	265	207	231	291	228	172	155	187
Birch	31	29	30	30	26	21	14	28	25	18	18
East Vadnais											25
West Vadnais				79	70	88	110	130	102	79	127
Sucker										49	41
Pleasant				24	35	47	65	30	38	45	41

Annual Average Total Phosphorus (TP) of VLAWMO Lakes:
2015-2020

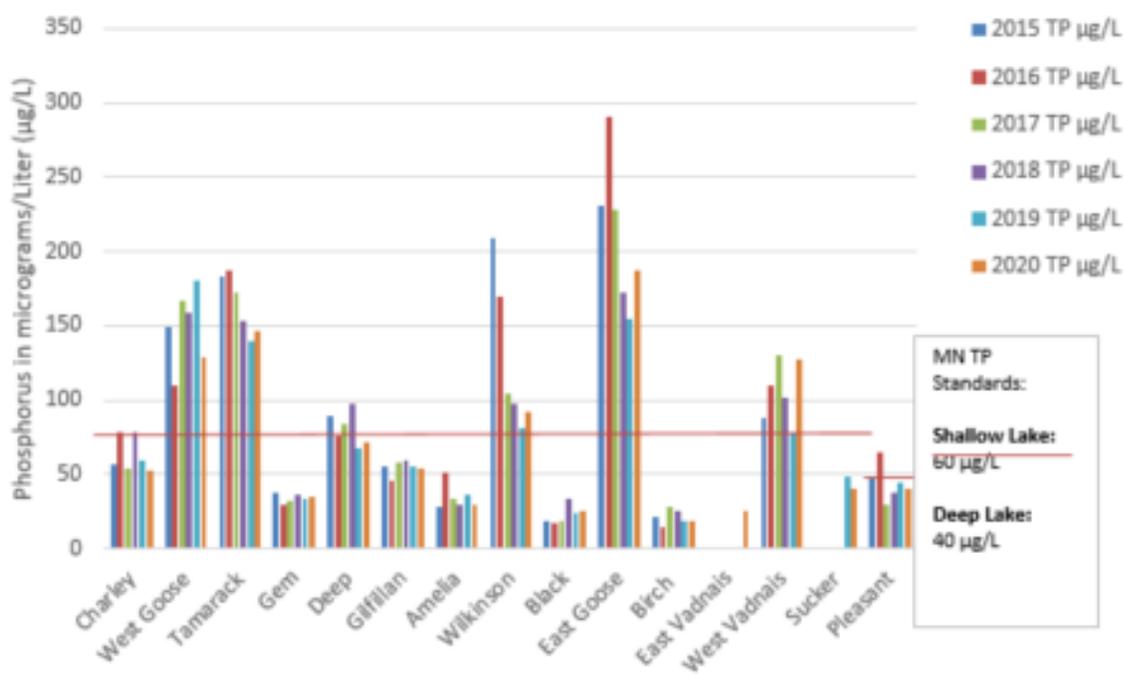


The red line marks the State Standard; when a water body becomes impaired.

Lake Comparison ChIA


	2010 ChIA µg/L	2011 ChIA µg/L	2012 ChIA µg/L	2013 ChIA µg/L	2014 ChIA µg/L	2015 ChIA µg/L	2016 ChIA µg/L	2017 ChIA µg/L	2018 ChIA µg/L	2019 ChIA µg/L	2020 ChIA µg/L
Charley	18.9	9.3	13	11	10	14	10	10	14	7	7
West Goose	39	27	51	32	68	97	67	53	79	109	148
Tamarack	96	28	64	50	72	119	87	68	103	104	122
Gem	24	6.4	11	17	8	23	18	16	15	11	14
Deep	15	12	12	21	13	23	8	9	23	8	8
Gilfillan	44	25	17	15	20	36	25	25	43	51	35
Amelia	12	8	9	19	7.5	21	12	5	4.5	10	5
Wilkinson	31	14	42	27	21	147	24	9	8	8	18
Black	6.6	6.9	6	6	8	14	4	3	6	3	4
East Goose	67	48	96	112	67	115	84	60	79	84	167
Birch	5	3	3	3	3	1	7	8	5	3	3
East Vadnais											3
West Vadnais				59	56	108	71	54	94	64	80
Sucker										14	8
Pleasant									14	15	16

VLAWMO Lakes Average ChIA 2015-2020

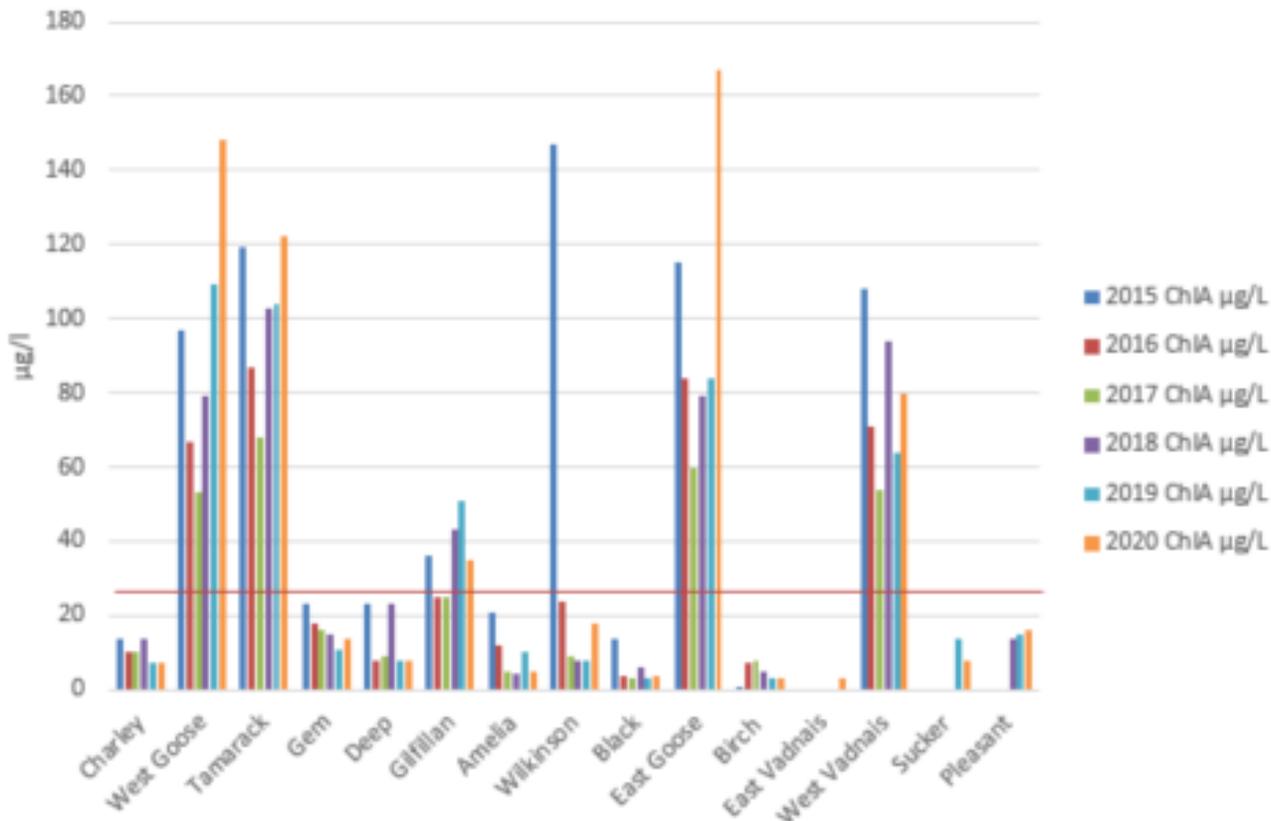


Lake Levels

Lake Elevations 2020					
NAVD88	Gilfillan	Birch	Gem	Goose	Wilkinson
gauge reading start	1	2	2.81	0.5	1.7
lake level start 4/27/2020	911.18	918.56	948.12	924.21	895.18
0.00 out	910.18	916.56	945.31	923.71	893.48
5/5/2020	911.13	918.56	948.14	924.21	895.27
5/26/2020	911.13	918.71	948.19	924.36	895.28
6/9/2020	911.08	918.56	948.05	924.23	895.27
6/23/2020	910.96	918.46	947.93	924.22	895.16
7/7/2020	911.08	918.56	947.99	924.33	895.24
7/22/2020	910.96	918.46	947.86	924.27	895.18
8/11/2020	910.81	918.27	947.66	924.21	895.10
8/25/2020	910.72	918.22	947.54	924.18	895.06
9/8/2020	910.56	918.11	947.37	924.09	894.98
9/22/2020	910.38	918.01	947.21	924.03	894.94
10/30/2020	910.35	917.92		924.08	
yearly increase/decrease	0.83	0.64	0.91	0.13	0.24

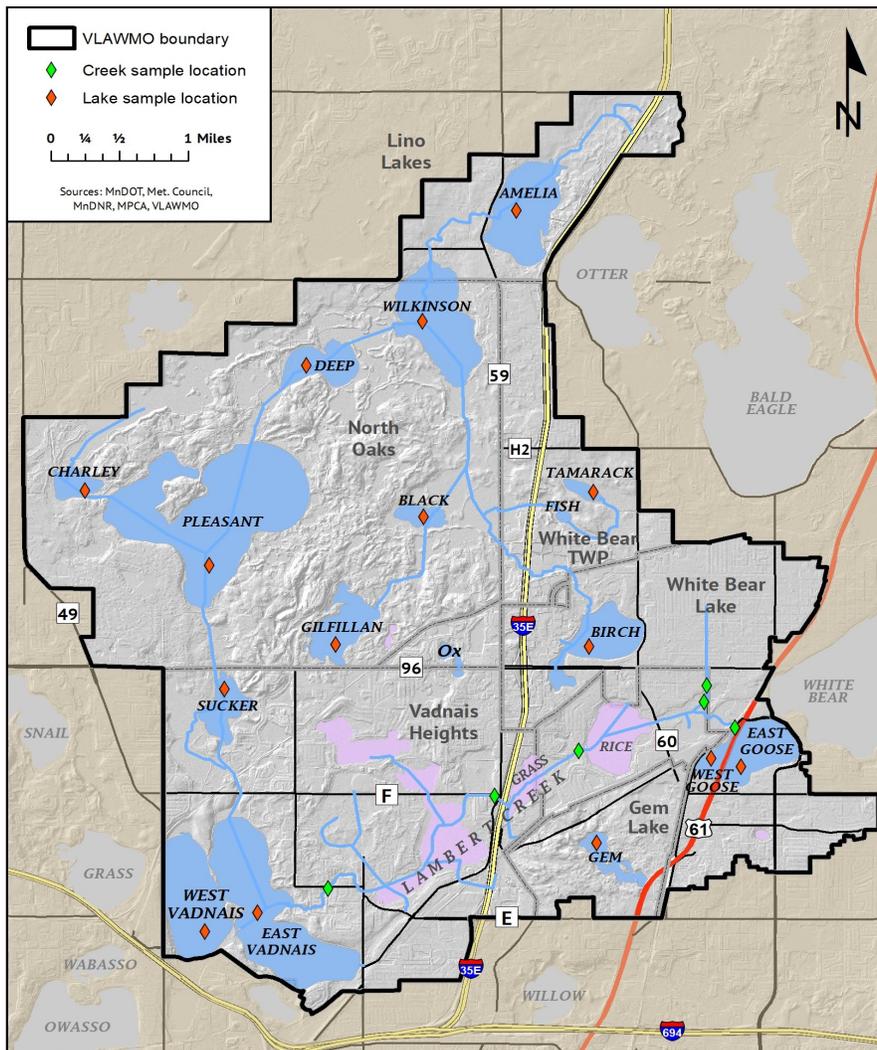

Lambert Creek


Samples are collected by VLAWMO staff at six sites along Lambert Creek on a bi-weekly basis May through September. The six sites noted in charts and graphs are: Goose Lake, WBL storm sewer, Whitaker Pond, Oakmede, County Rd F, and Kohler Rd. The samples are analyzed by RMB Environmental for TP, ChIA, SRP, TKN, NH3, NO3, TSS. VLAWMO volunteers collect pH, conductivity, DO and temperature readings at all locations except the WBL storm sewer. Creek flow is also collected at the flumes along with automated flow meters at 4 locations. This information will help with the TMDL process and allows us to set baselines to compare with future monitoring data.

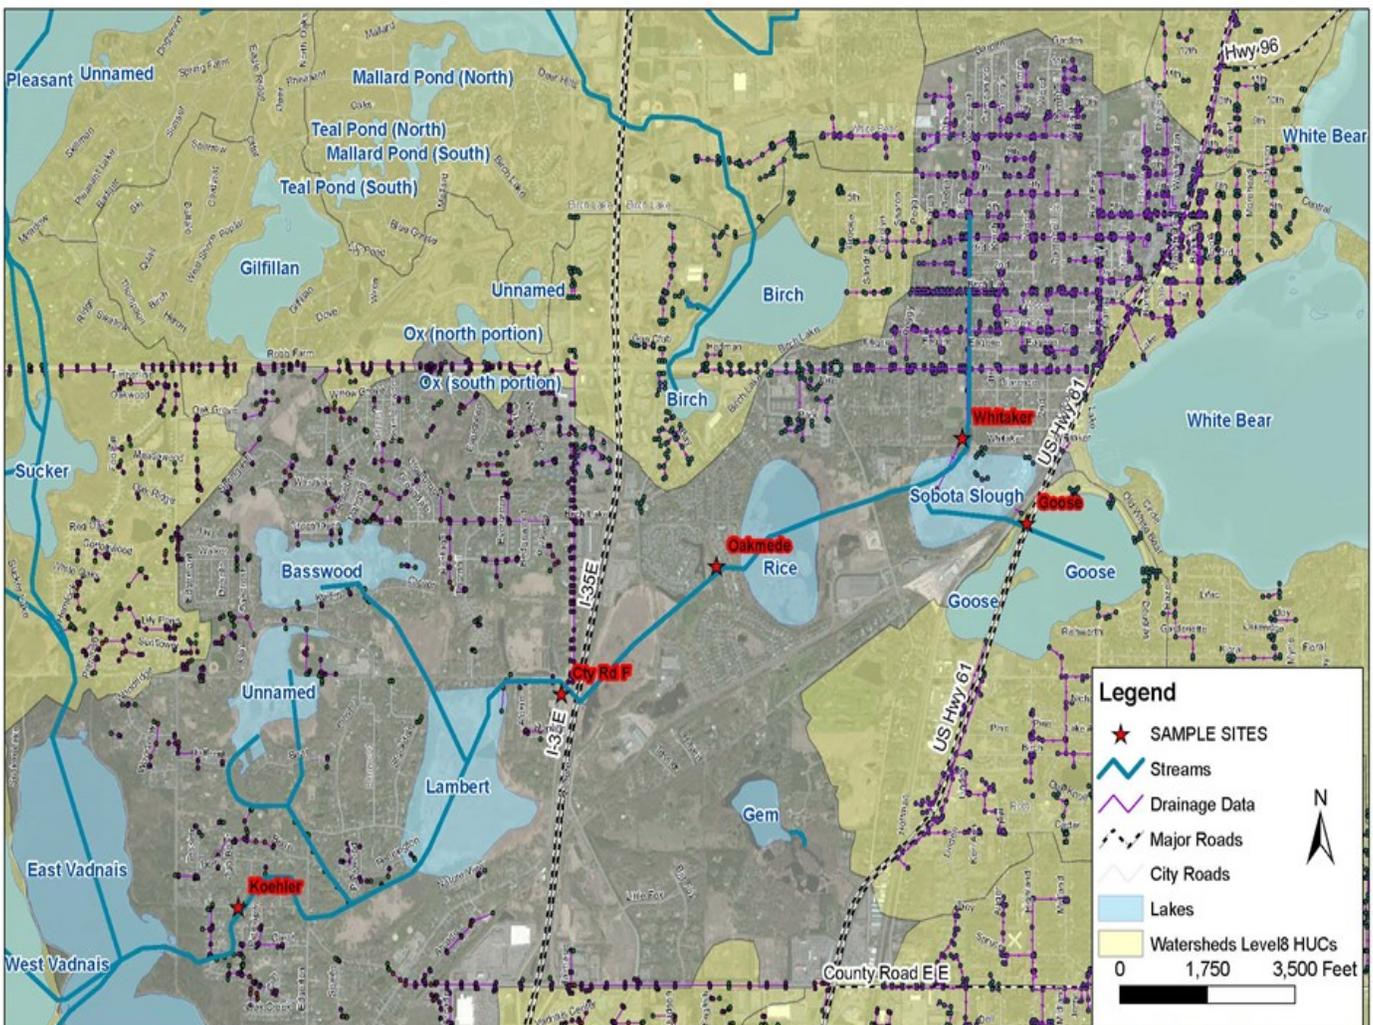

Lambert Creek—Goose

Lambert Creek-Goose			
Year	TP(μg/L)	TSS (mg/L)	ChIA (mg/m ³)
2009	230	22	
2010	130	16	
2011	138	12	
2012	246	40	
2013	102	7	
2014	199	51	
2015	181	37	
2016	189	53	59
2017	185	75	58
2018	224	54	103
2019	193	45	70
2020	141	27	61


Date	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
4/21/2020	9.6	0.391	7.23	6.34
6/24/2020	21.4	0.376	4.32	7.82
7/22/2020	22.1	0.347	3.65	8.67
9/23/2020	17.7	0.378	1.78	7.94

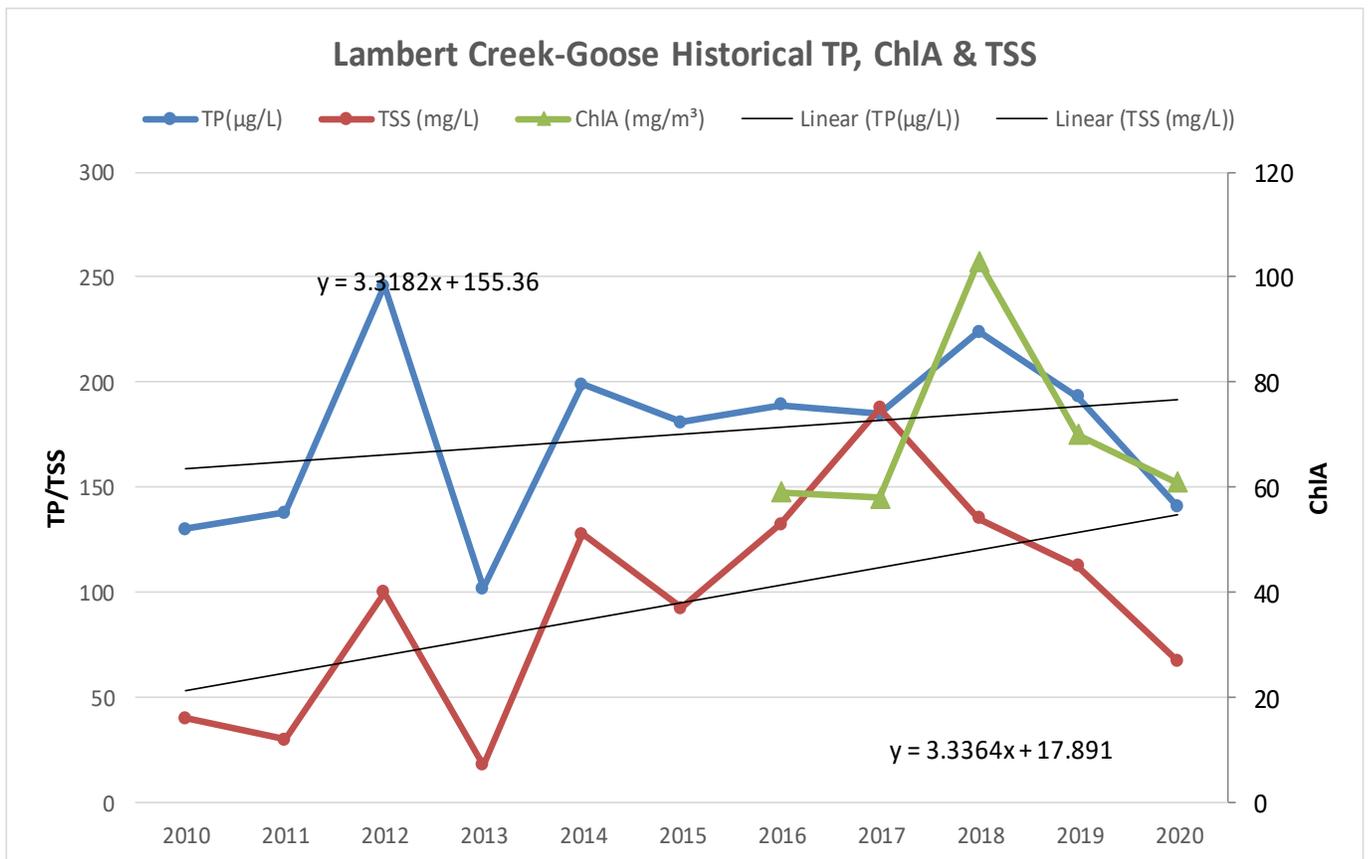

- LC-Goose Lake was above the state standards for TP but lower than 2019. State standard is 130 μg/l. State standard for TSS is 14mg/l. LC-Goose TSS was higher than state standard

Lambert Creek—Goose


SITE	DATE	TP (mg/L)	ChlA (µg/l)	TSS (mg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+N O3 mg/L	CL (mg/L)
lc-goose	3/10/2020							70
lc-goose	5/6/2020	98	33.4	19	1.67	< 0.06	< 0.03	
lc-goose	5/27/2020	139	32	25.2				
lc-goose	6/10/2020	124	20	11.8	1.51	0.259	< 0.03	
lc-goose	6/24/2020	95	24	12.3				
lc-goose	7/8/2020	186	98.8	50	2.65	< 0.06	< 0.03	
lc-goose	7/22/2020	144	78.8	24.7				
lc-goose	8/12/2020	150	92.6	37	2.81	< 0.06	< 0.03	
lc-goose	8/26/2020	198	147	43.6				
lc-goose	9/9/2020	162	56.6	25.6	3.44	0.569	< 0.03	
lc-goose	9/23/2020	114	24	26				

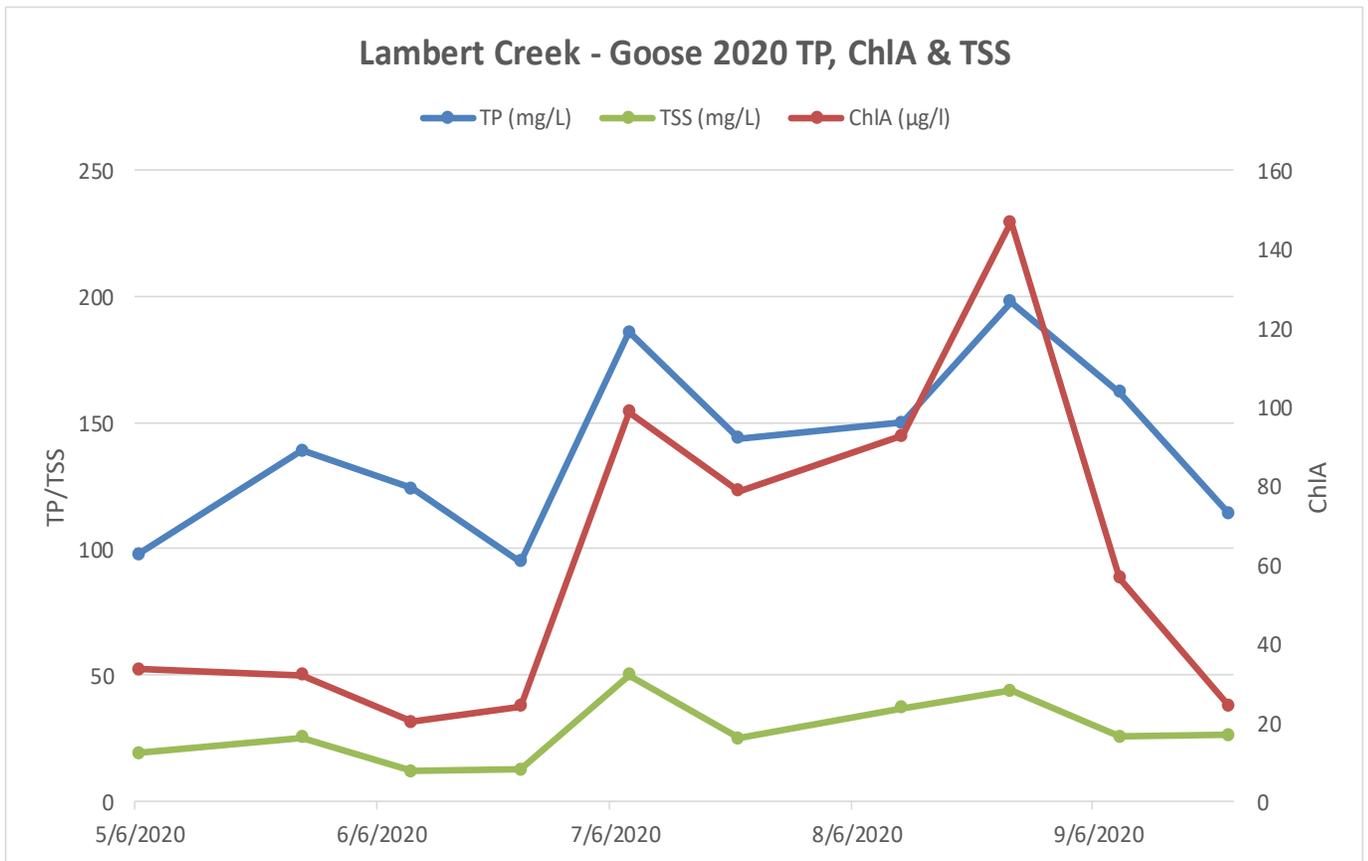

Lambert Creek—Whitaker

Whitaker				
Year	TP($\mu\text{g/L}$)	SRP($\mu\text{g/L}$)	TSS(mg/L)	ChIA (mg/m^3)
2009	240		11	
2010	229	91	19.7	
2011	157	45	12.7	
2012	398	103	11.5	
2013	226	71	9	
2014	173	100	1.4	
2015	416	157	3.1	
2016	267	119	8	8
2017	202	93	6	3
2018	173	69	6	21
2019	209	93	11	35
2020	264	87	8	62


Date	Temp $^{\circ}\text{C}$	Conductivity (mS/cm)	DO (mg/L)	pH
4/21/2020	9.13	0.809	13.69	6.11
6/24/2020	20.53	0.432	1.57	7.62
7/22/2020	21.33	0.258	0.84	9.18
9/23/2020	17.61	0.587	3.23	7.89

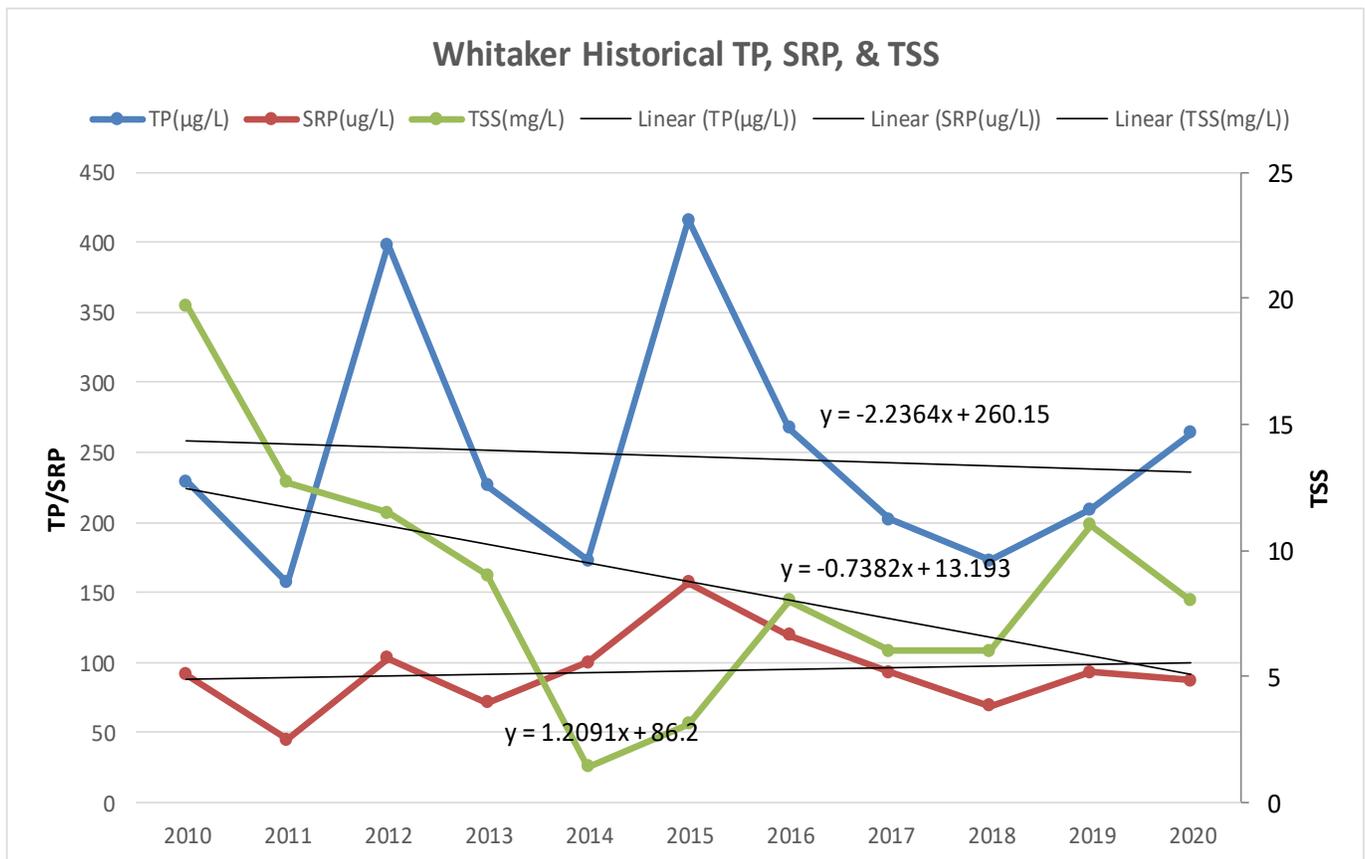

- Whitaker Pond is above state standards for TP. State standard is 130 $\mu\text{g/l}$. State standard for TSS is 14 mg/l . Since the forebay was installed in 2011 TSS has dropped, indicating the forebay is functioning as designed.


Lambert Creek—Whitaker

SITE	DATE	TP (µg/L)	ChlA (µg/l)	TSS (mg/L)	SRP (µg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+N O3 mg/L	Cl (mg/L)
whitaker	3/10/2020								155
whitaker	5/6/2020	128	17.6	5.5	18	1.21	0.198	0.971	
whitaker	5/27/2020	138	10.7	6.5	57				
whitaker	6/10/2020	238	37.9	7	95	1.4	0.394	0.21	
whitaker	6/24/2020	184	19.4	2.4	109				
whitaker	7/8/2020	348	17.2	7.1	145	2.12	0.684	0.175	
whitaker	7/22/2020	278	49.8	6	106				
whitaker	8/12/2020	296	55	6.4	138	1.62	0.535	0.063	
whitaker	8/26/2020	477	111	10.6	155				
whitaker	9/9/2020	266	232	16.4	11	2.42	0.217	0.083	
whitaker	9/23/2020	287	68.4	10.4	34				

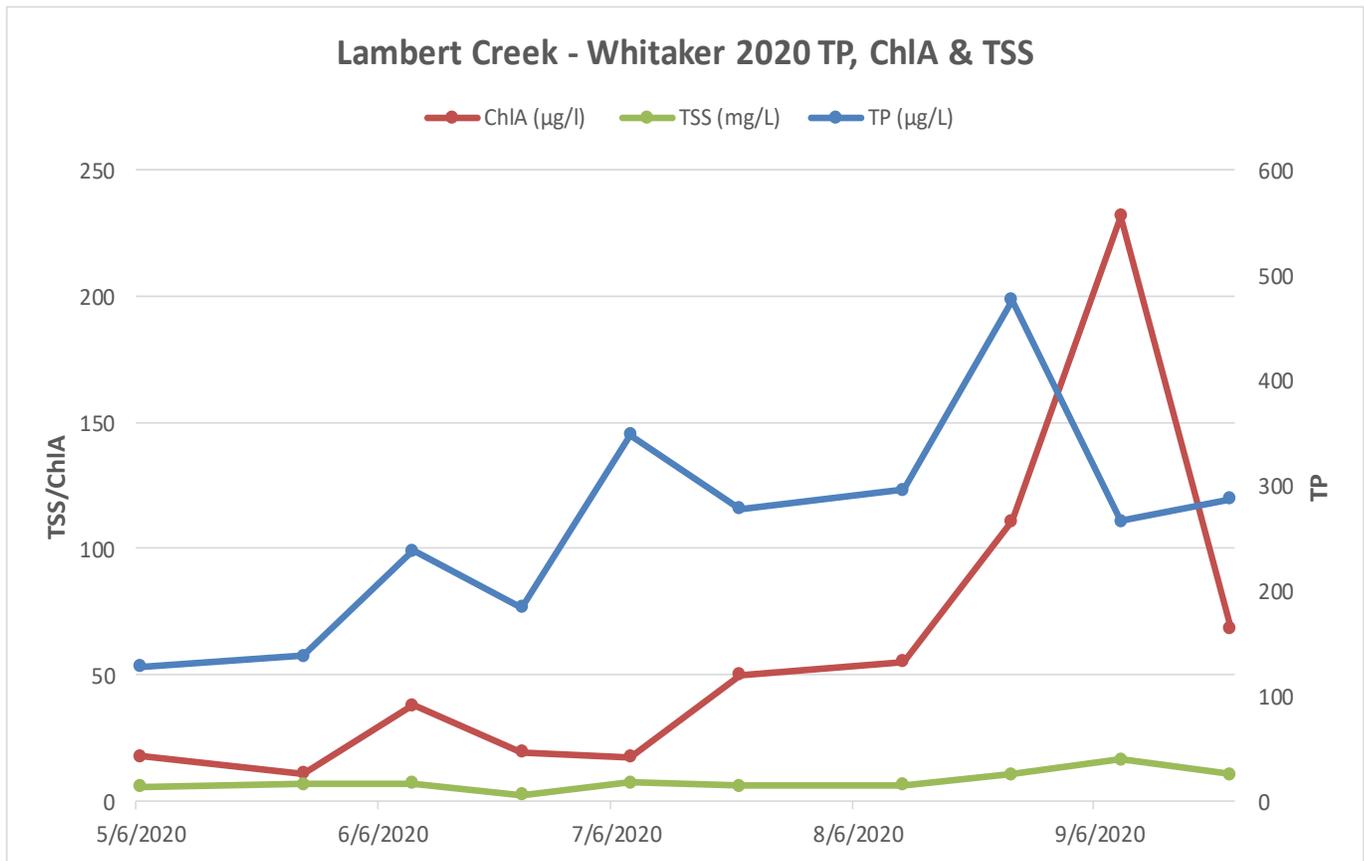

Lambert Creek—WBLSS


White Bear Lake Storm Sewer					Date	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
Year	TP(µg/L)	SRP(µg/L)	TSS(mg/L)	ChIA (mg/m ³)	4/21/2020	7.9	0.840	8.13	5.96
2009	110		5.9		6/24/2020	13.9	0.763	6.17	7.56
2010	180	76	15.8		7/22/2020	16.8	0.520	3.55	9.36
2011	181	93	7.3		9/23/2020	15.0	0.789	5.27	7.88
2012	104	66	8.3						
2013	106	85	10						
2014	119	97	1						
2015	101	83	1						
2016	96	84	4.7	5					
2017	94	73	5	1					
2018	89	62	11	4					
2019	94	84	11	2					
2020	103	86	7	2					

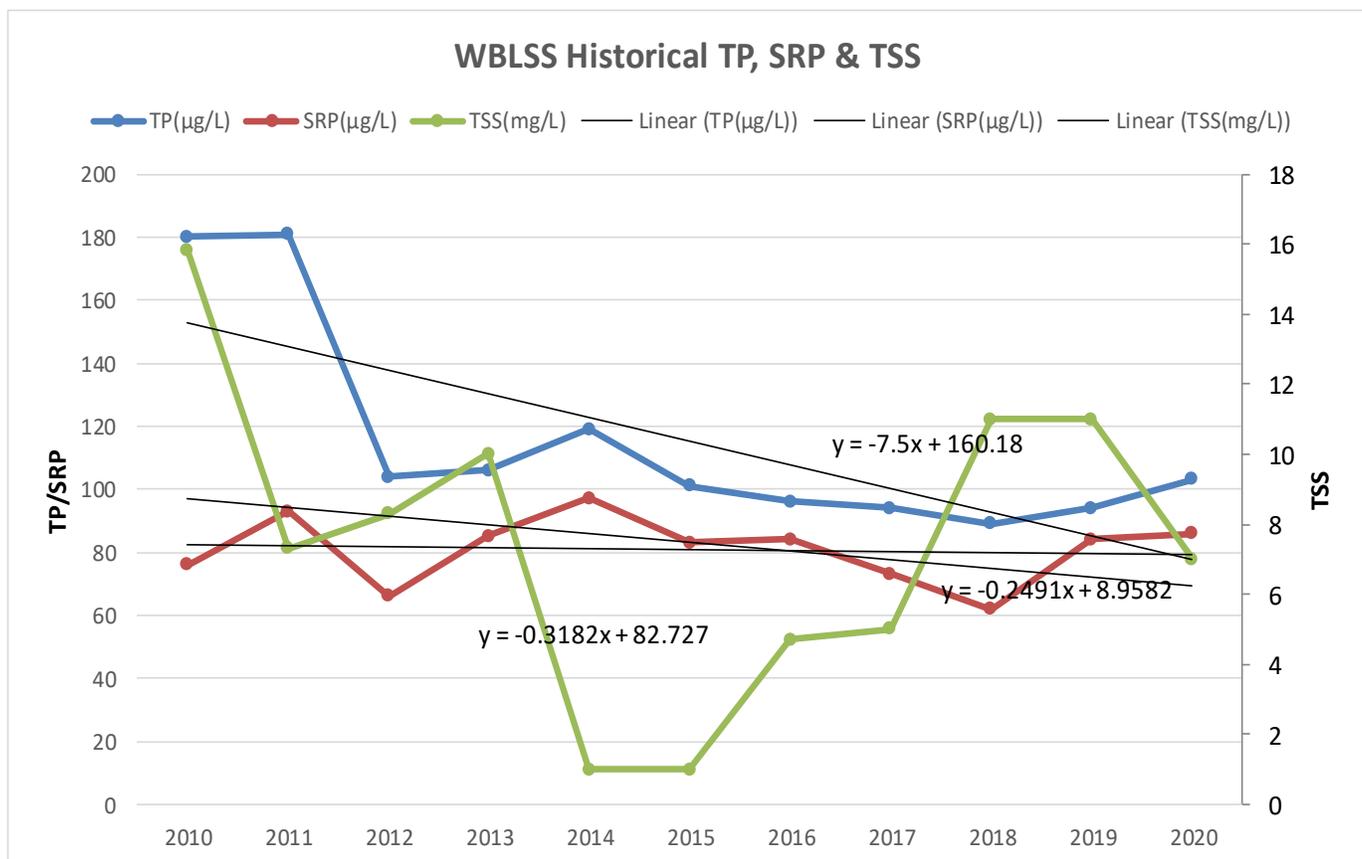

- Since 2012 WBLSS is below state standards for TP. State standard is 130 µg/l. State standard for TSS is 14mg/l. SRP is also tested at this site. Both TP and SRP are showing a downtrend, TSS levels have shown an up trend


Lambert Creek—WBLSS

SITE	DATE	TP (µg/L)	ChlA (µg/l)	TSS (mg/L)	SRP (µg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
WBLSS	3/10/2020								70
WBLSS	5/6/2020	86	< 1	1.6	86	< 0.3	< 0.06	5.15	
WBLSS	5/27/2020	96	< 1	3.2	64				
WBLSS	6/10/2020	110	< 1	1.5	80	0.36	< 0.1	3.12	
WBLSS	6/24/2020	99	< 1	2.3	88				
WBLSS	7/8/2020	104	7.42	1.6	83	0.572	0.1	3.82	
WBLSS	7/22/2020	102	8.01	3	72				
WBLSS	8/12/2020	120	3.81	4.4	72	0.492	< 0.06	3.67	
WBLSS	8/26/2020	100	1.14	< 1	101				
WBLSS	9/9/2020	107	< 1	< 1	109	0.46	< 0.06	4.56	
WBLSS	9/23/2020	109	16	3.2	105				

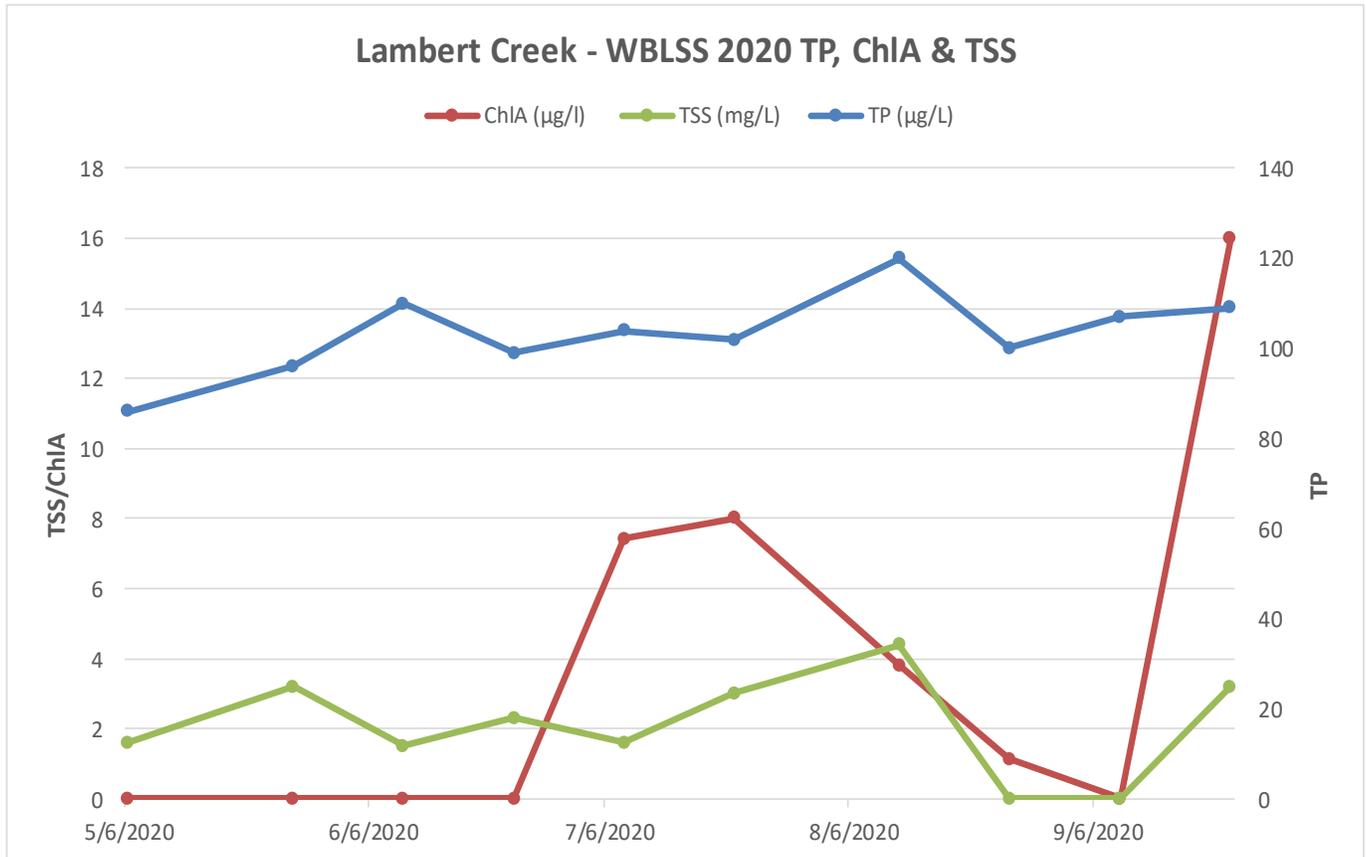



Lambert Creek—WBLSS

	WBLSS TP (µg/L)	Whitaker TP (µg/L)		WBLSS SRP (µg/L)	Whitaker SRP(µg/L)		WBLSS TSS (mg/L)	Whitaker TSS(mg/L)
2009	110	240	2009			2009	5.9	11
2010	180	229	2010	76	91	2010	15.8	19.7
2011	181	157	2011	93	45	2011	7.3	12.7
2012	104	398	2012	66	103	2012	8.3	11.5
2013	106	226	2013	85	71	2013	10	9
2014	119	173	2014	97	100	2014	9.5	14
2015	101	416	2015	83	157	2015	10	16
2016	96	267	2016	84	119	2016	4.7	8
2017	94	202	2017	73	93	2017	5	6
2018	89	173	2018	62	69	2018	11	6
2019	94	209	2019	84	93	2019	11	11
2020	103	264	2020	86	87	2020	7	8

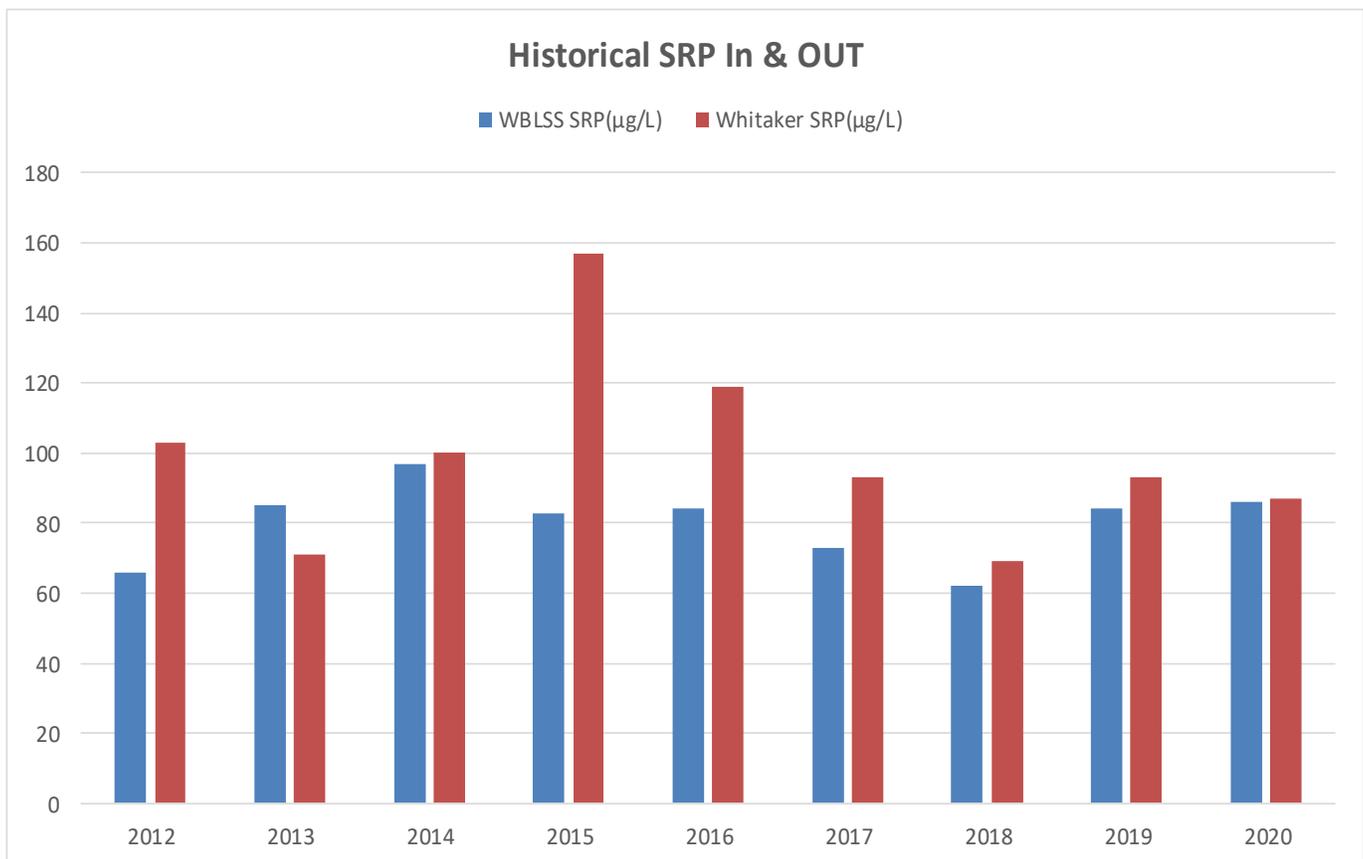

- The above graphs are the average year to year comparisons of nutrient levels entering Whitaker Pond from the WBLSS and leaving Whitaker Pond.

Lambert Creek—WBLSS

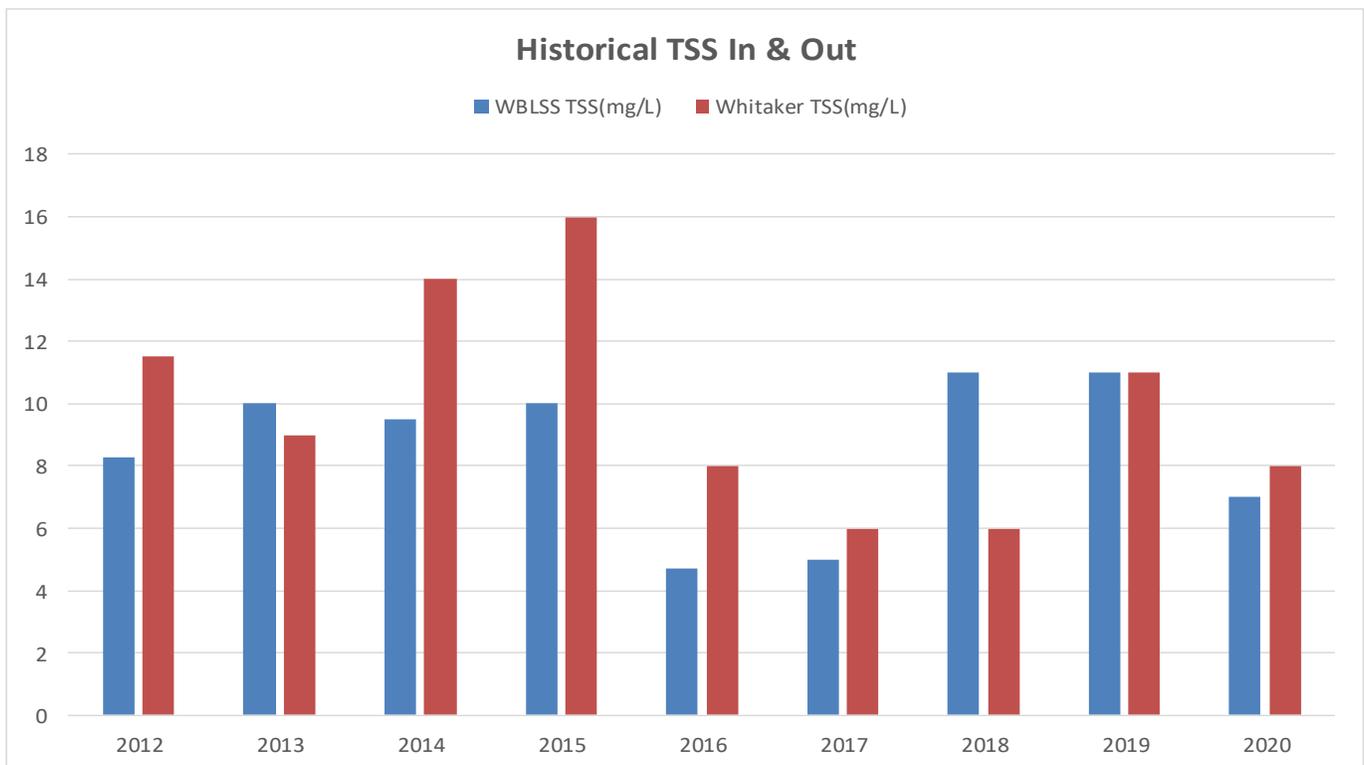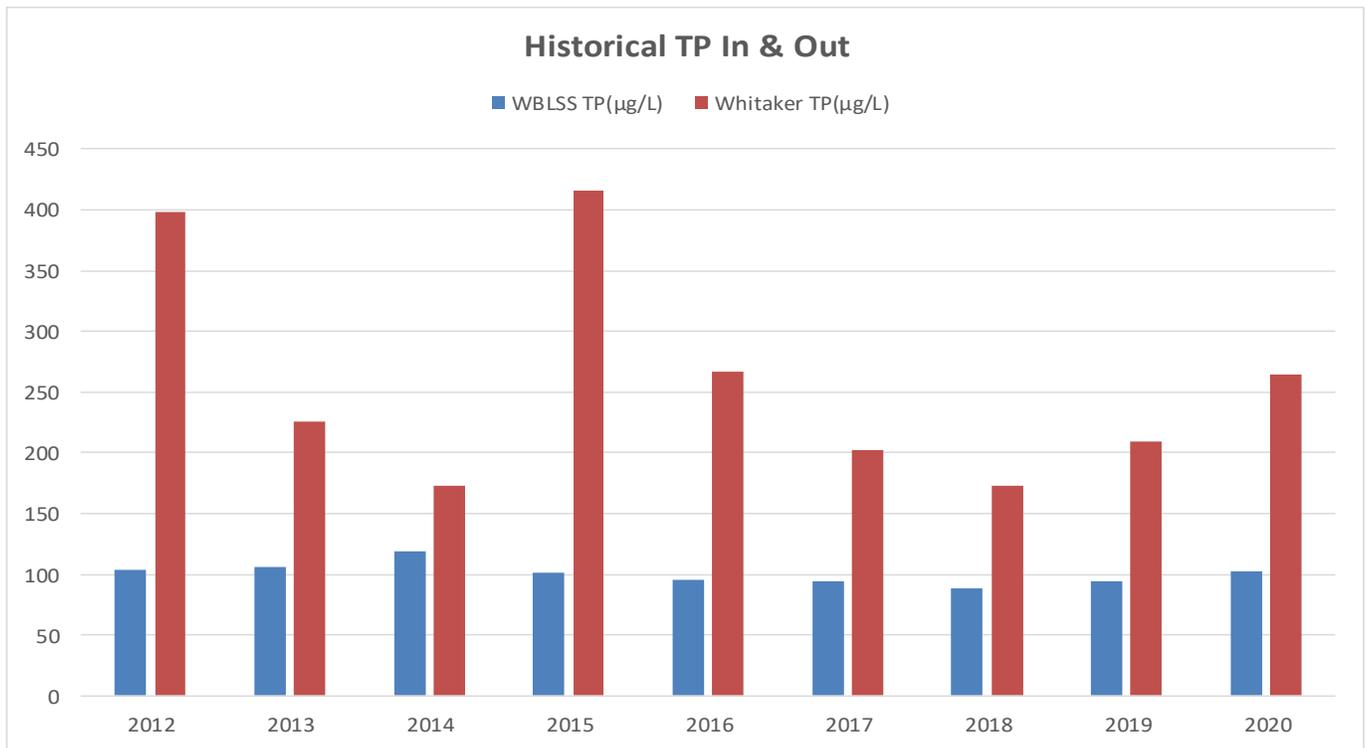


- The above graphs are the average year to year comparisons of nutrient levels entering Whitaker Pond from the WBLSS and leaving Whitaker Pond.

Lambert Creek—Oakmede

Oakmede			
Year	TP(µg/L)	TSS (mg/L)	ChlA (mg/m³)
2009	210	6	
2010	222	4	
2011	224	5	
2012	283	8	
2013	390	13	
2014	285	1	
2015	178	0	
2016	166	6	8
2017	207	5	4
2018	228	3	9
2019	212	3	10
2020	215	3	5


Date	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
4/21/2020	9.71	0.525	8.77	5.71
6/24/2020	22.1	0.497	2.04	7.68
7/22/2020	23.25	0.466	2.36	8.48
9/23/2020	16.2	0.536	2.76	7.84

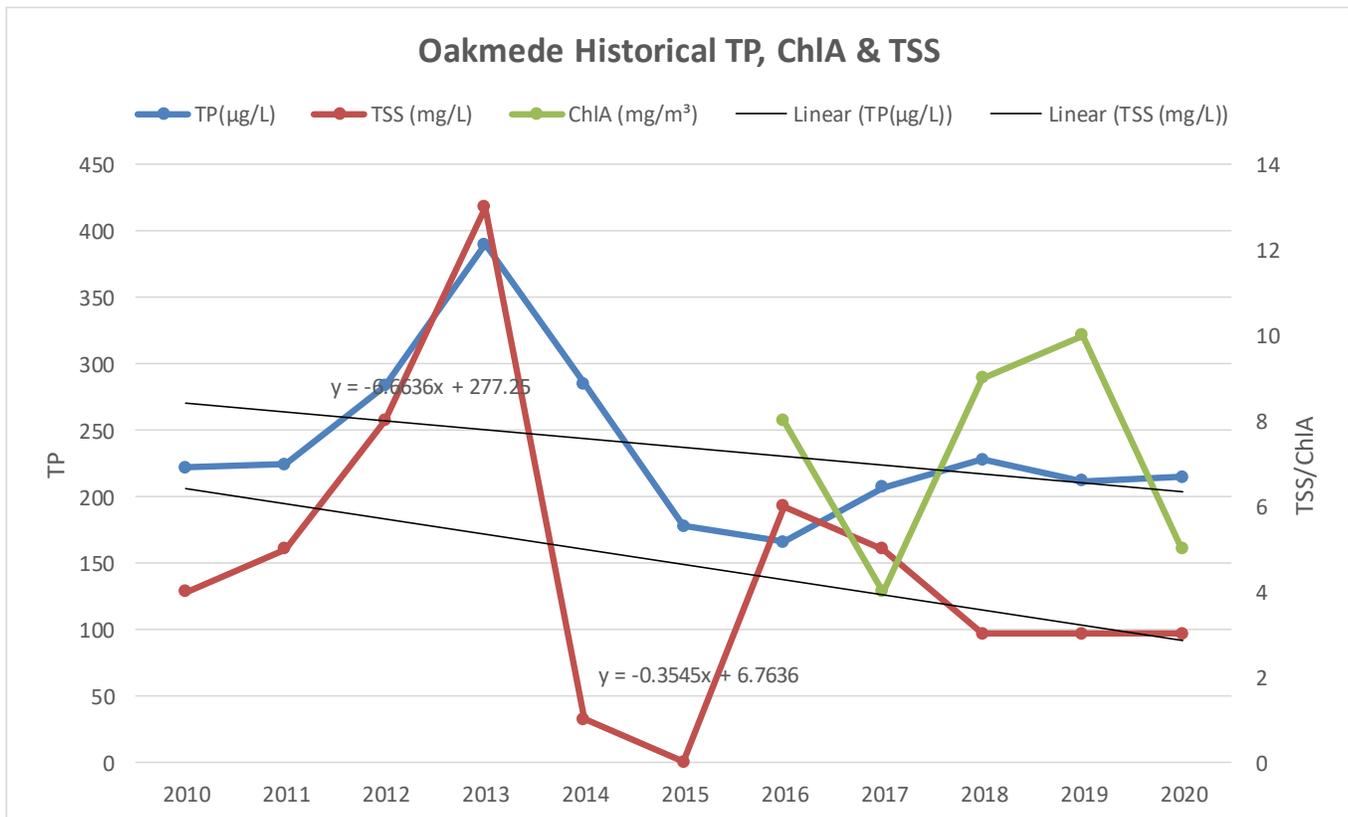


- LC-Oakmede has been above state standards for TP. State standard 130 µg/l State standard for TSS is 14mg/l, LC-Oakmede is below state standard for TSS the last 12 years.

Lambert Creek—Oakmede

SITE	DATE	TP (µg/L)	ChlA (µg/l)	TSS (mg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
oakmede	3/10/2020							116
oakmede	5/6/2020	125	8.31	2.1	0.576	0.077	0.038	
oakmede	5/27/2020	116	8.68	2.5				
oakmede	6/10/2020	244	8.54	2	0.74	0.132	< 0.03	
oakmede	6/24/2020	218	2	1.9				
oakmede	7/8/2020	252	6.86	8	1.18	0.231	< 0.03	
oakmede	7/22/2020	166	7.12	2.2				
oakmede	8/12/2020	203	5.87	2.6	0.869	0.2	< 0.03	
oakmede	8/26/2020	335	2.67	2.4				
oakmede	9/9/2020	142	1.19	< 1	0.788	0.162	0.035	
oakmede	9/23/2020	353	1.07	6				

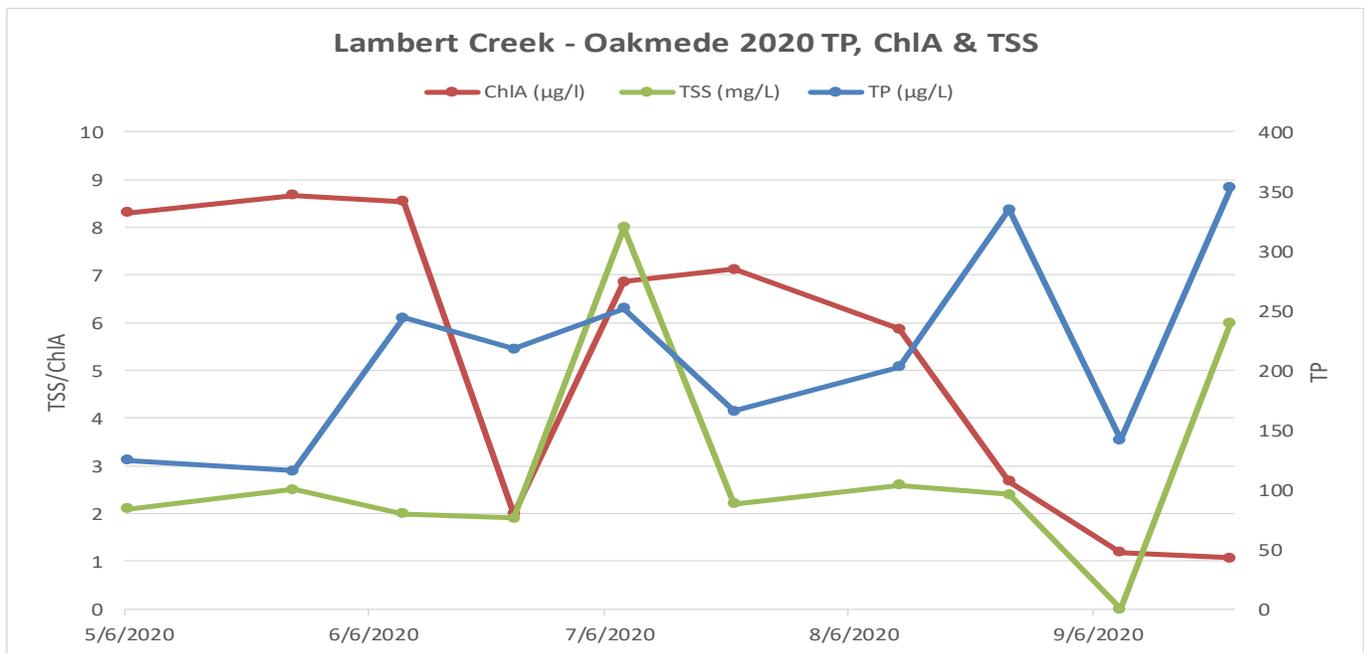


Date	Flow (cfs)	TP (µg/l)
5/6/2020	2.53	125
5/27/2020	6.56	116
6/10/2020	3.08	244
6/24/2020	1.82	218
7/8/2020	2.97	252
7/22/2020	2.22	166
8/12/2020	0.89	203
8/26/2020	0.82	335
9/9/2020	0.75	142
9/23/2020	0.62	353

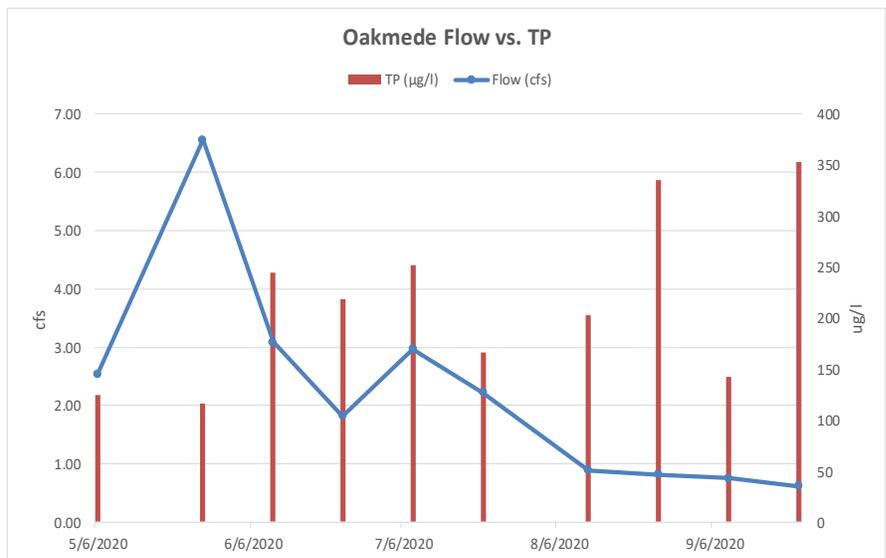

Lambert Creek—Cty Rd F

County Road F			
Year	TP(µg/L)	TSS (mg/L)	ChlA (mg/m ³)
2009	190	11	
2010	403	10	
2011	299	6	
2012	395	8	
2013	707	14	
2014	393	1	
2015	339	0	
2016	334	12	4
2017	298	7	4
2018	304	5	8.5
2019	250	5	4
2020	292	6	4


Date	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
4/21/2020	7.1	0.602	8.87	5.77
6/24/2020	18.89	0.573	4.56	7.73
7/22/2020	19.7	0.564	2.93	8.72
9/23/2020	15.5	0.827	2.86	7.84

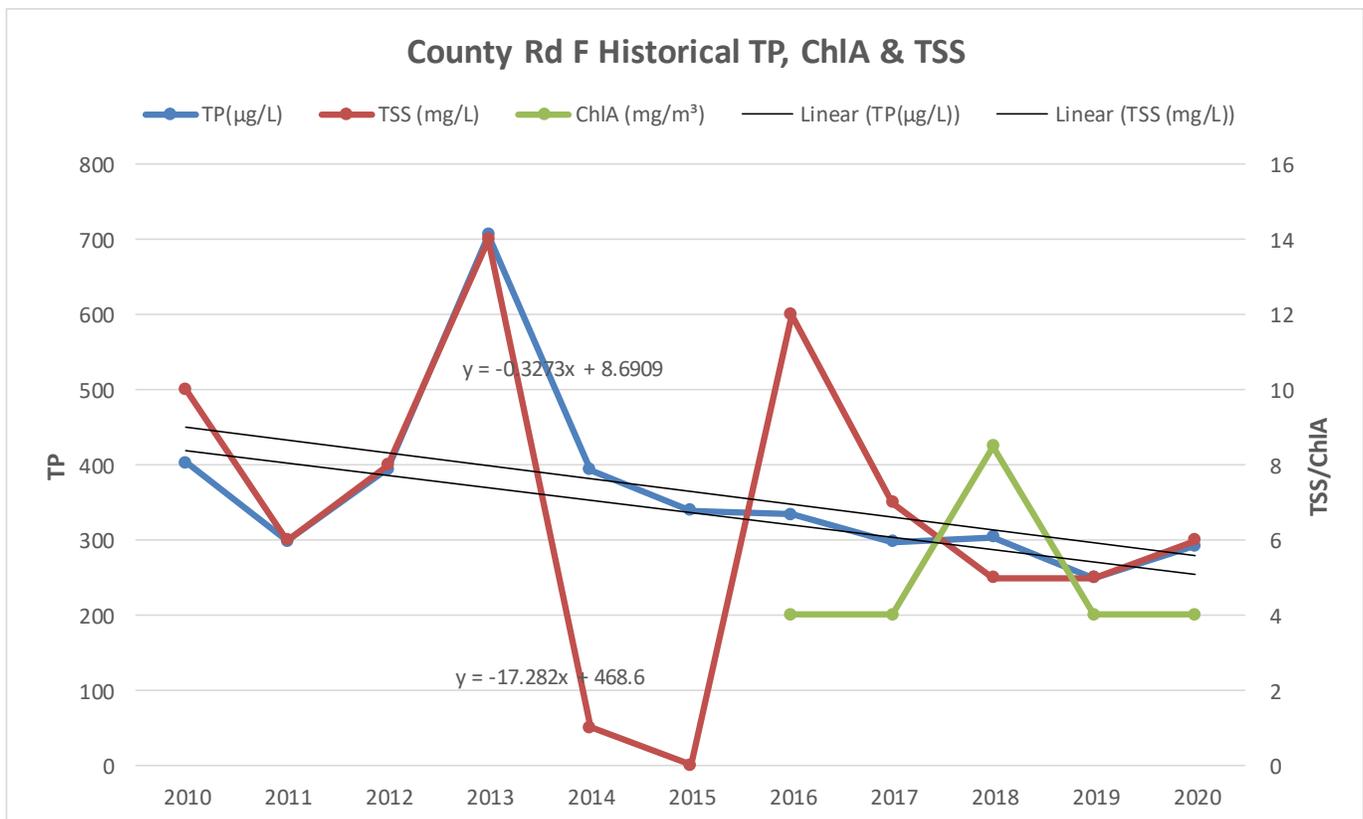


- LC-Cty Rd. F has been well above state standards for TP. This is the highest level of TP out of all six sampling sites on the creek. State standard is 130 ug/l. State standard for TSS is 14mg/l. MNDOT did work on 35E and the ditch running into the creek during 2016. Ponds and structures were added to the ditch to address flow. Time will tell if this will have an effect on the water quality at this site.

Lambert Creek—Cty Rd F

SITE	DATE	TP (mg/L)	ChlA (µg/l)	TSS (mg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
cty rd F	3/10/2020							115
cty rd F	5/6/2020	49	2.97	1.6	0.56	0.064	0.038	
cty rd F	5/27/2020	141	5.34	4				
cty rd F	6/10/2020	287	8.54	3.5	0.879	< 0.1	0.049	
cty rd F	6/24/2020	193	2.29	2.4				
cty rd F	7/8/2020	737	3.56	14.5	1.07	0.062	< 0.03	
cty rd F	7/22/2020	416	4.67	7.8				
cty rd F	8/12/2020	294	3.56	6.2	1.07	0.195	0.044	
cty rd F	8/26/2020	359	3.56	7.2				
cty rd F	9/9/2020	220	3.29	4.2	0.915	0.205	< 0.03	
cty rd F	9/23/2020	229	4.81	6				

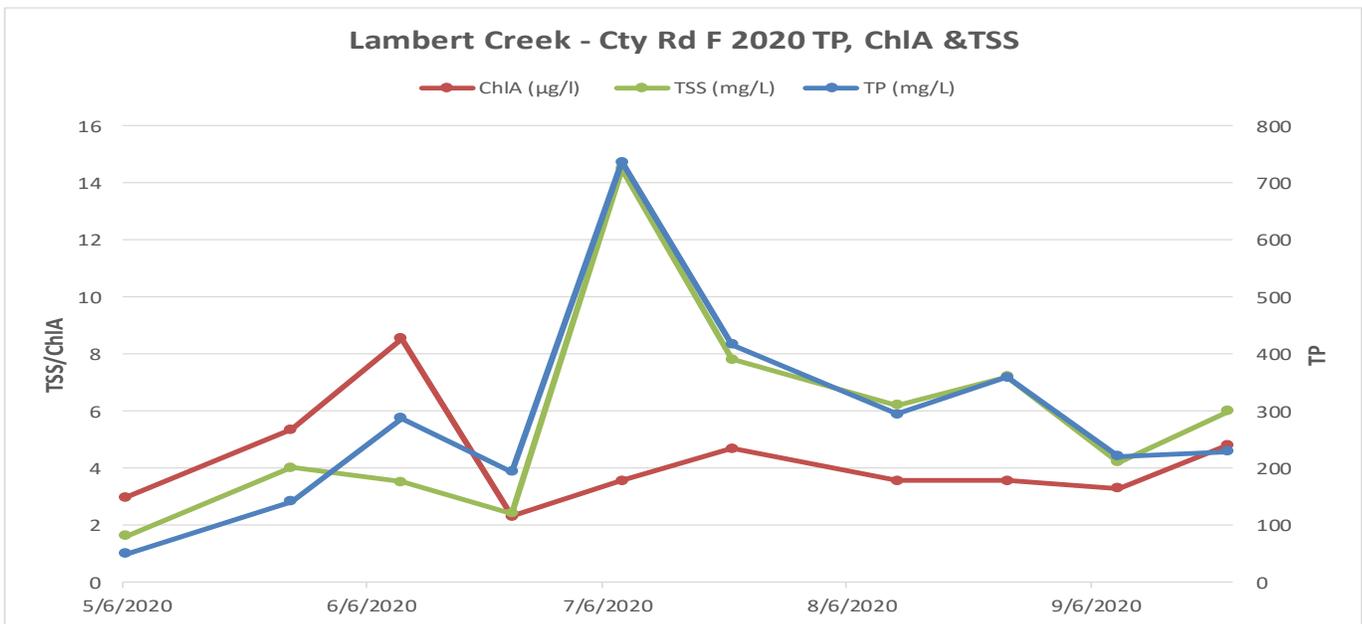


Date	Flow (cfs)	TP (ug/l)
5/6/2020	1.78	49
5/27/2020	3.43	141
6/10/2020	2.15	287
6/24/2020	1.63	193
7/8/2020	2.23	737
7/22/2020	1.63	416
8/12/2020	0.46	294
8/26/2020	0.51	359
9/9/2020	0.56	220
9/23/2020	0.26	229

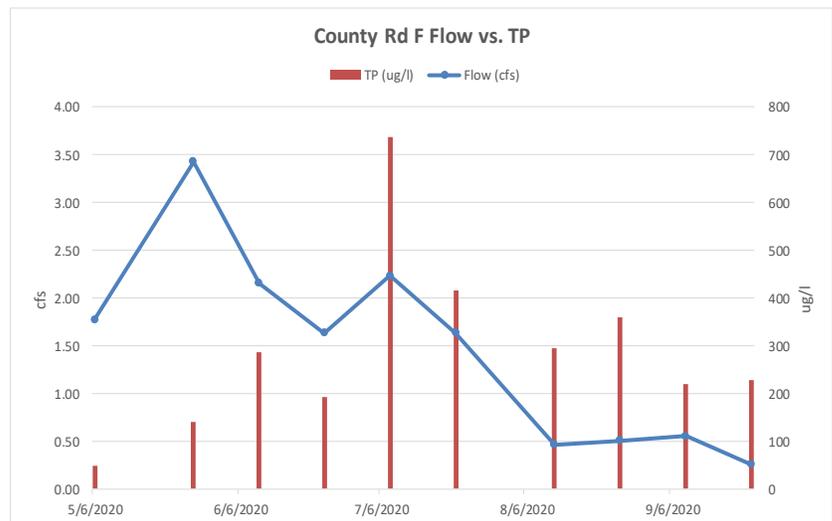

Lambert Creek—Koehler

Koehler			
Year	TP(µg/L)	TSS (mg/L)	ChIA (mg/m ³)
2009	120	9	
2010	194	10	
2011	229	8	
2012	207	4	
2013	231	6	
2014	301	5	
2015	244	2	
2016	135	5	3
2017	93	5	5
2018	177	5	7
2019	156	5	13
2020	89	3	5


Date	Temp °C	Conductivity (mS/cm)	DO (mg/L)	pH
4/21/2020	5.0	0.768	10.32	7.47
6/24/2020	16.94	0.710	4.42	7.74
7/22/2020	18.7	0.713	3.76	8.87
9/23/2020	15.31	0.935	4.92	7.96

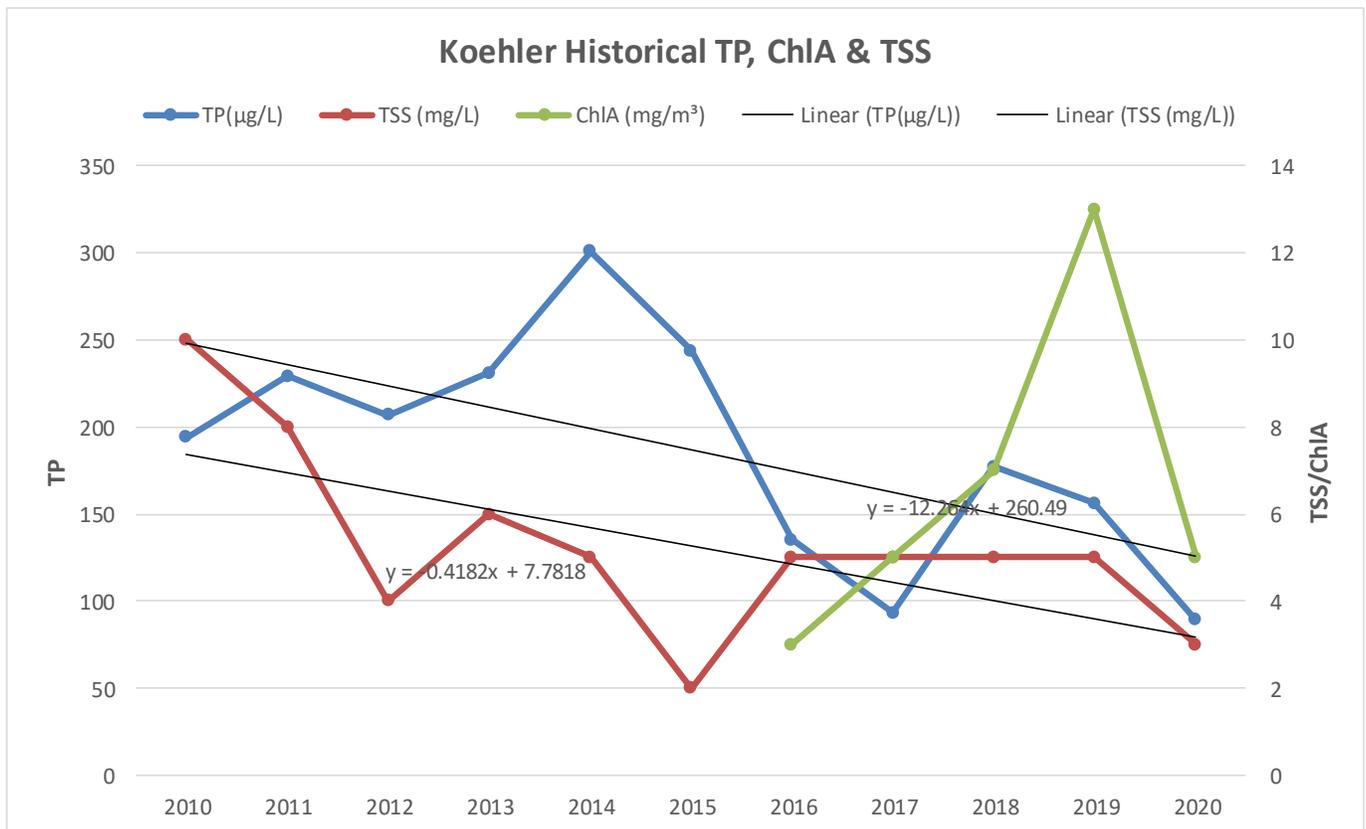


- State standard is 130 µg/l. State standard for TSS is 14mg/l. Stream bank restoration was done in 2011 and have noticed improvement in TSS levels over the years since restoration

Lambert Creek—Koehler

SITE	DATE	TP (µg/L)	ChlA (µg/l)	TSS (mg/L)	TKN (mg/L)	NH3 (mg/L)	NO2+NO3 mg/L	CL (mg/L)
koehler	3/10/2020							106
koehler	5/6/2020	43	19.9	4.3	0.901	0.188	0.198	
koehler	5/27/2020	125	6.01	10				
koehler	6/10/2020	162	1.34	7	0.906	< 0.1	0.09	
koehler	6/24/2020	70	1.34	1.7				
koehler	7/8/2020	166	< 1	2.7	1.07	0.111	0.239	
koehler	7/22/2020	94	< 1	1.8				
koehler	8/12/2020	48	3.2	1.6	0.795	0.102	0.665	
koehler	8/26/2020	63	1.6	1.8				
koehler	9/9/2020	69	< 1	1.8	0.939	0.267	0.554	
koehler	9/23/2020	51	1.34	2.1				

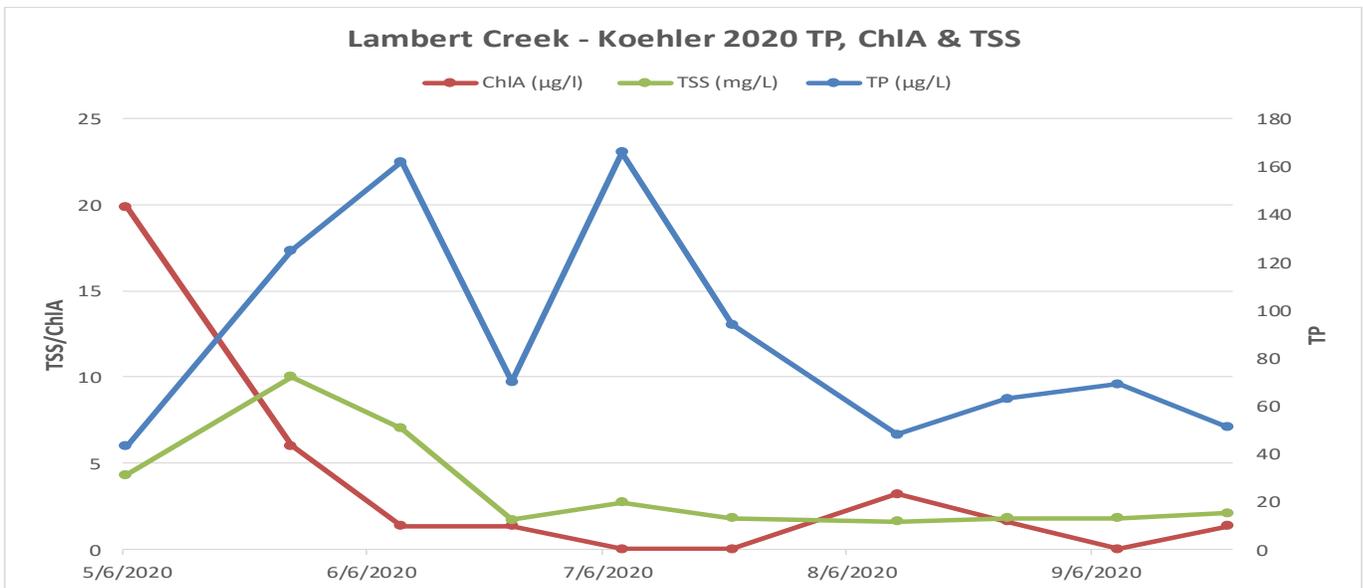


Date	Flow (cfs)	TP (ug/l)
5/6/2020	3.61	43
5/27/2020	14.60	125
6/10/2020	7.74	162
6/24/2020	1.81	70
7/8/2020	1.81	166
7/22/2020	2.36	94
8/12/2020	0.60	48
8/26/2020	0.78	63
9/9/2020	0.99	69
9/23/2020	0.69	51

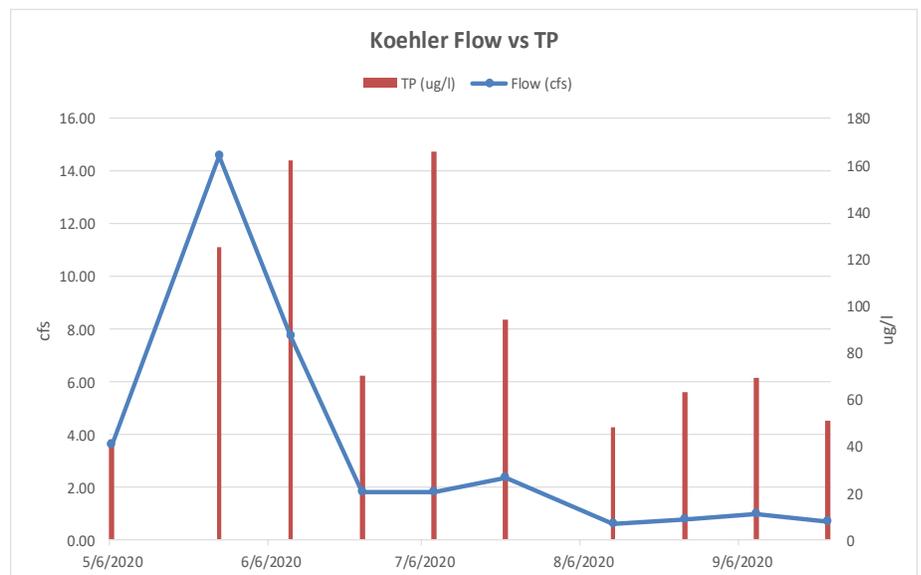


Lambert Creek Flow

Creek Flow			
Date	Oakmede	Cty Rd. F	Koehler
3/10/2020	3.44	2.23	7.08
4/21/2020	2.11	1.29	2.50
5/6/2020	2.53	1.78	3.61
5/27/2020	6.56	3.43	14.60
6/10/2020	3.08	2.15	7.74
6/24/2020	1.82	1.63	1.81
7/8/2020	2.97	2.23	1.81
7/22/2020	2.22	1.63	2.36
8/12/2020	0.89	0.46	0.60
8/26/2020	0.82	0.51	0.78
9/9/2020	0.75	0.56	0.99
9/23/2020	0.62	0.26	0.69

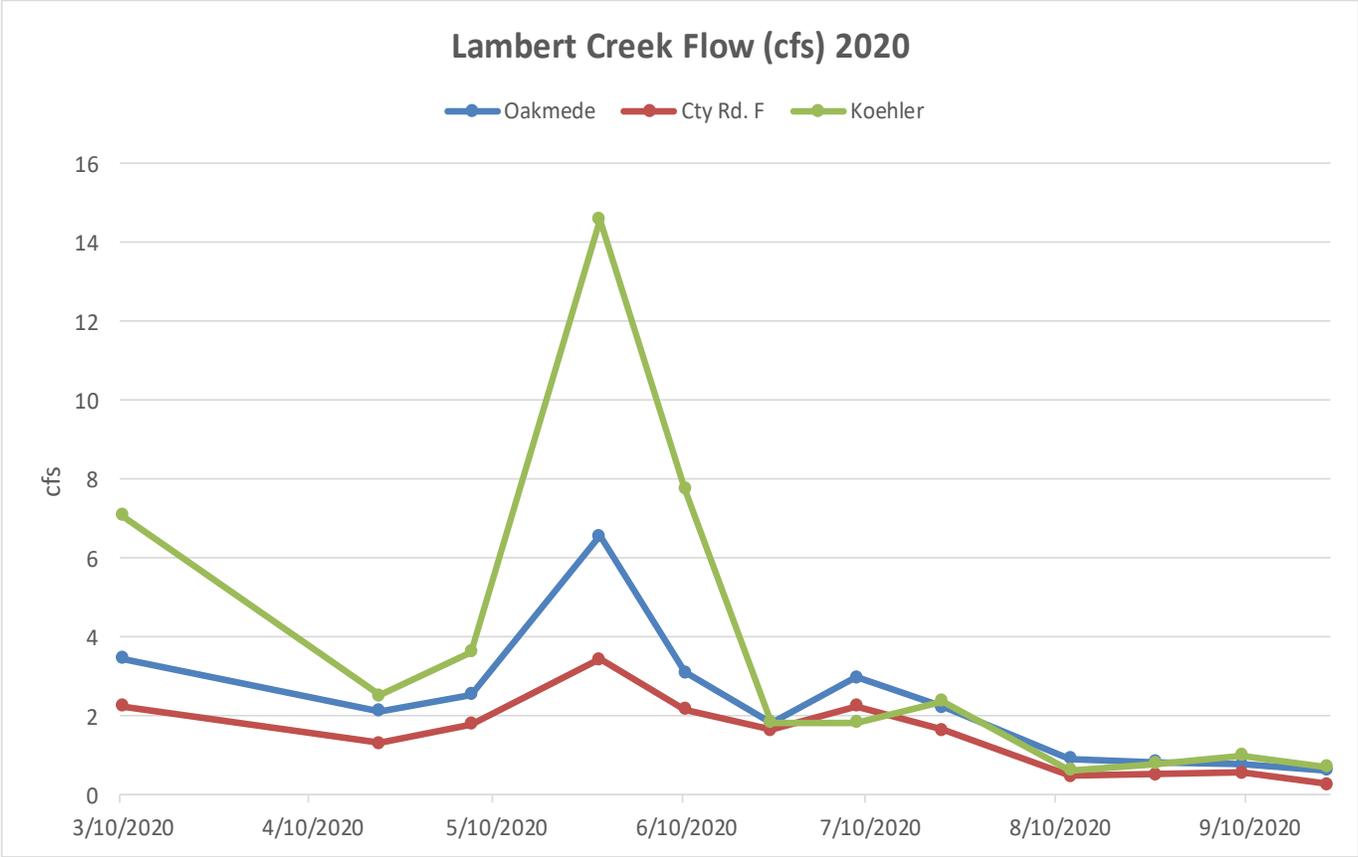


Lambert Creek Comparison

Lambert Creek Average Yearly Tp ($\mu\text{g/L}$) 2010-2020											
	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Goose	130	138	246	102	199	181	189	185	224	193	141
WBLSS	180	181	104	106	173	101	96	94	89	94	103
Whita-ker	229	157	398	226	119	416	267	202	173	209	264
Oak-mede	222	224	283	390	285	178	166	207	228	212	215
Cty Rd F	403	299	395	707	393	339	334	298	304	250	292
Koehler	194	229	207	231	301	244	135	93	177	156	89

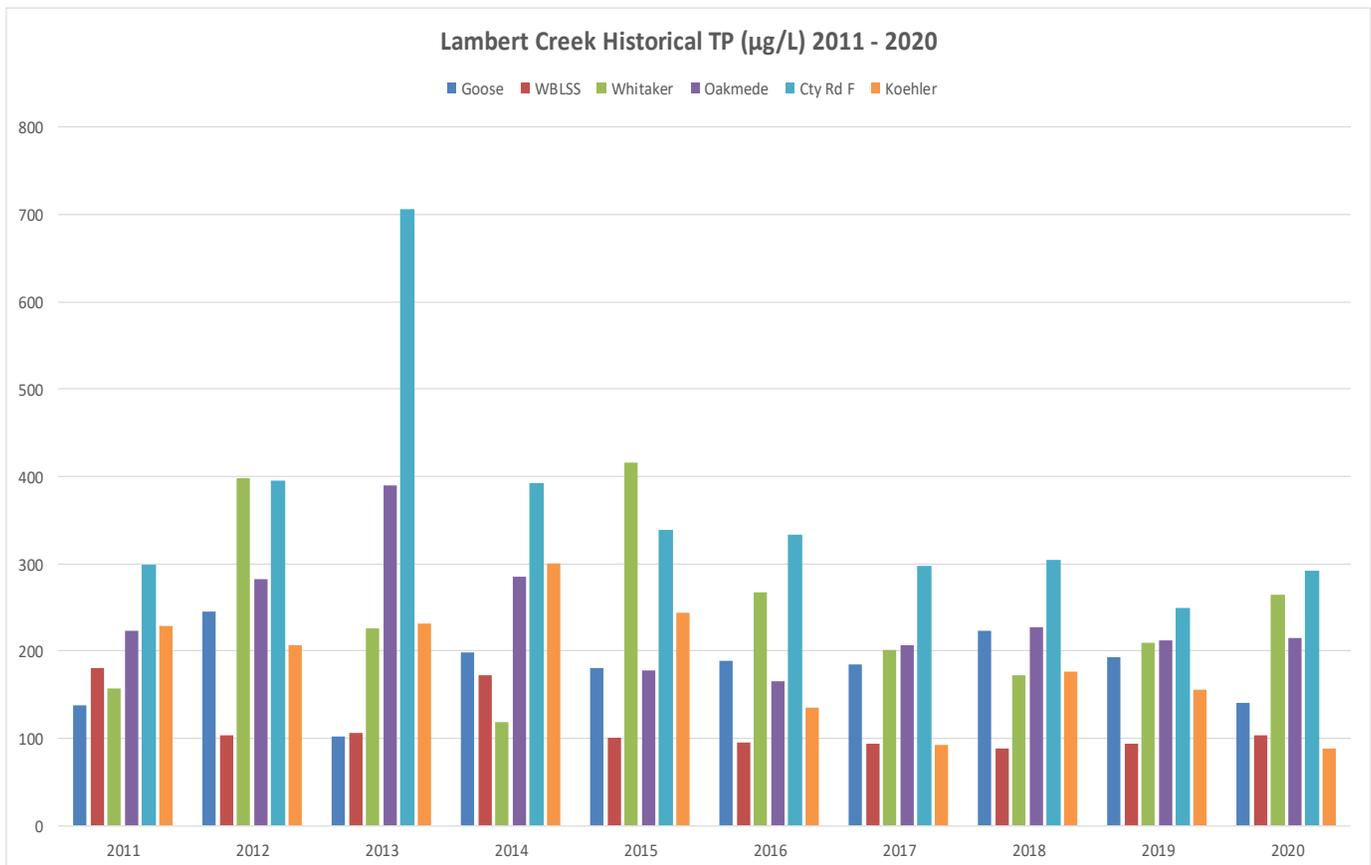

Lambert Creek Comparison

SITE	CL 2012	CL 2013	CL 2014	CL 2015	CL 2016	CL 2017	CL 2018	CL 2019	CL 2020
WBLSS	11.1	76	507.5	200	113	113	153	322	70
LC-Goose	30.9	40.5	32.75	20	30	31	53	65	70
Whitaker	67.5	52	175.5	305	167	365	390	120	155
Koehler	79.2	107.5	157	158	101	136	234	151	106
Oakmede	84.0	85.5	141.75	101	90	115	145	180	116
Cty Rd F	92.4	90.5	104	107	85	119	151	171	115

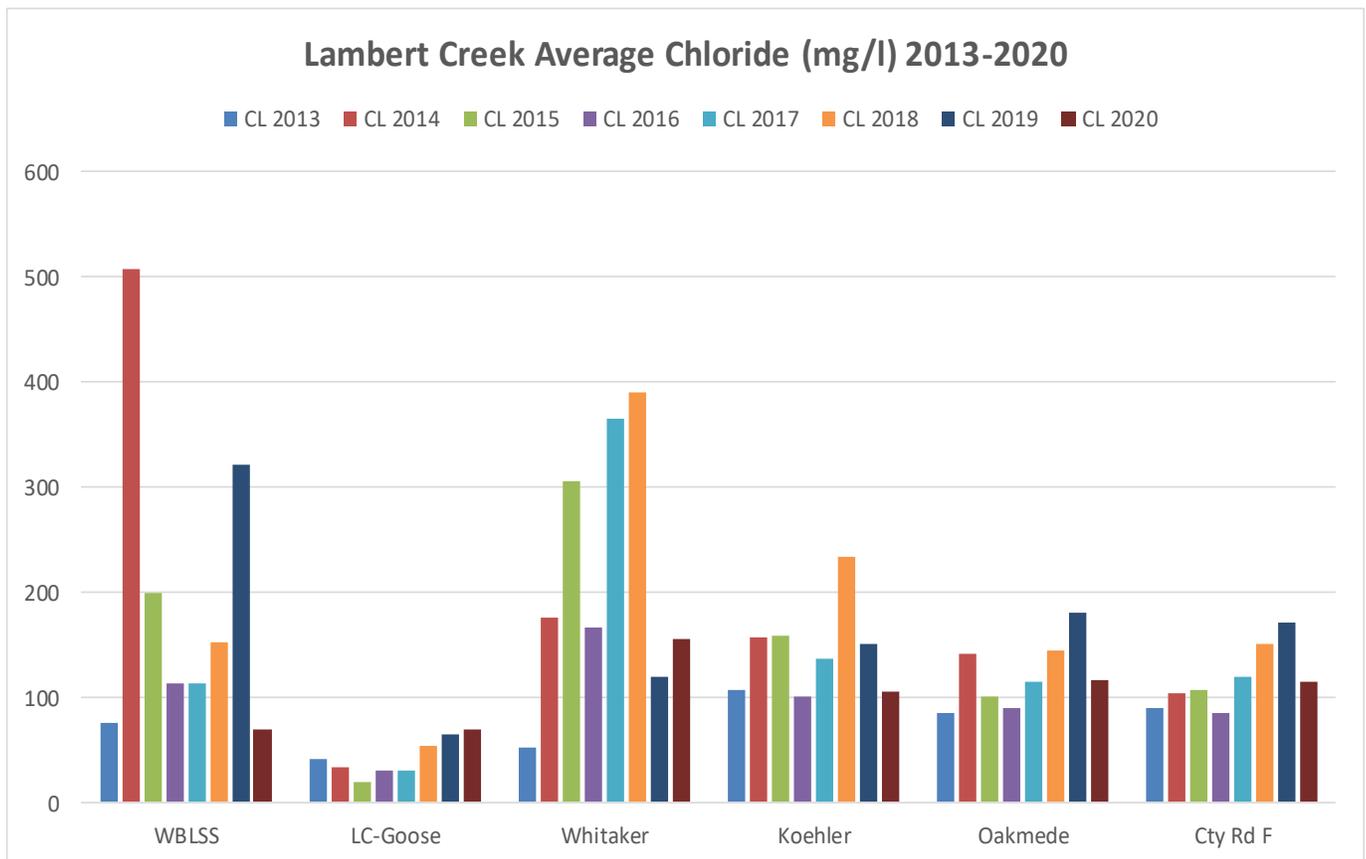

2020 Monitoring Highlights

- **Pleasant & East Vadnais Lake:** VLAWMO added Pleasant and East Vadnais lake to the sampling program in 2020. East Vadnais water quality was very good and well below state standards. Pleasant lake was below state nutrient standards as well.
- **Remote Monitoring Devices:** 2020 was the first full year of automated creek flow monitoring. Live information can be found here for the 4 sites monitored on the creek. <http://monitormywatershed.org/>
- **Goose Lake:** East Goose and West Goose have exceptionally high nutrient levels. VLAWMO is working with local partners and stakeholders to discuss plans for future management activities to help address the high nutrient levels.
- **Lambert Creek:** Creek flow was significantly lower in 2020 than 2019 due to almost 10 inches less rain. Nutrient levels were similar to 2019.
- **Birch Lake Storm Sampling:** 2020 was the first season of monitoring the effectiveness of the iron enhanced filter system on the corner of 4th Street and Otter Lake Rd. Initial results show filter is reducing phosphorus levels. Monitoring will continue in 2021.
- **Lake Nutrient Levels:** Nutrient levels in all 15 lakes VLAWMO monitors were very similar to 2019 even though we saw almost 10 inches less rain in 2020 compared to 2019.
- **Chloride (Road Salt):** Chloride levels overall were similar compared to 2019. VLAWMO has been sampling lake chloride for 11 years and while slight rises are documented, there have been no significant changes within the lakes. Black Lake has the lowest levels. Birch Lake and East Goose are the highest, which coincides with their proximity to major roads and storm drainage. All of the lakes are below the current State standard of 230 mg/L. The Creek samples are attempted, but are confined to times when water is flowing from streets into the creek. Year round chloride sampling on Birch Lake was done for the fourth year and levels have increased slightly.
- **Monitoring Data:** The VLAWMO monitoring data was used for multiple subshed studies and grant applications in 2020 to aid in possible water quality projects moving forward in 2021. A Wilkinson Lake feasibility study was done to assess possible BMP locations to help reduce nutrient loading to Wilkinson Lake. Data was also used for both the state 319 grant and the BWSR's Water Based Funding Grant.